



Hand in hand for tomorrow



## Product data sheet

Feed-through modules COS

# COS

Feed-through modules

## Robust. Reliable. Flexible.

### Optional modules COS

Optional modules for feeding through different media such as electrical signals, pneumatics, fluids and vacuum.

#### Field of application

For fast media transfer with short change-over times between change master and change adapter in order to supply the end effector with the required media.

#### Advantages – Your benefits

**Fits perfectly** for easy combination with SCHUNK tool changers

**Wide range of different variants** for feeding through of various media

**Module variety** the appropriate module for the required media transfer for every size of SCHUNK tool changers

**Connector variants with radial, axial, and side cable outlet** for a low interfering contour in restricted spaces

**Combination of several optional modules** for maximum flexibility of the tool changer

**Minimum wear** for a high number of change cycles and a long service life

**Customer-specific designs available on request** the suitable solution for any application

**Cable connector, cable extensions and protection covers available on request** for a comprehensive complete solution from one source



## Application example



① Automatic tool changers CPS

③ Modular storage rack CTS

⑤ 2-finger parallel gripper JGP-P

② Optional modules COS

④ Universal gripper EGU

### SCHUNK offers more ...

The following components make the product even more productive – the suitable addition for the highest functionality, flexibility, reliability, and controlled production.



Tool changer




Manual change system



Pallet change system

① For more information on these products can be found on the following product pages or at [schunk.com](http://schunk.com).

## Overview of optional modules and mounting pattern

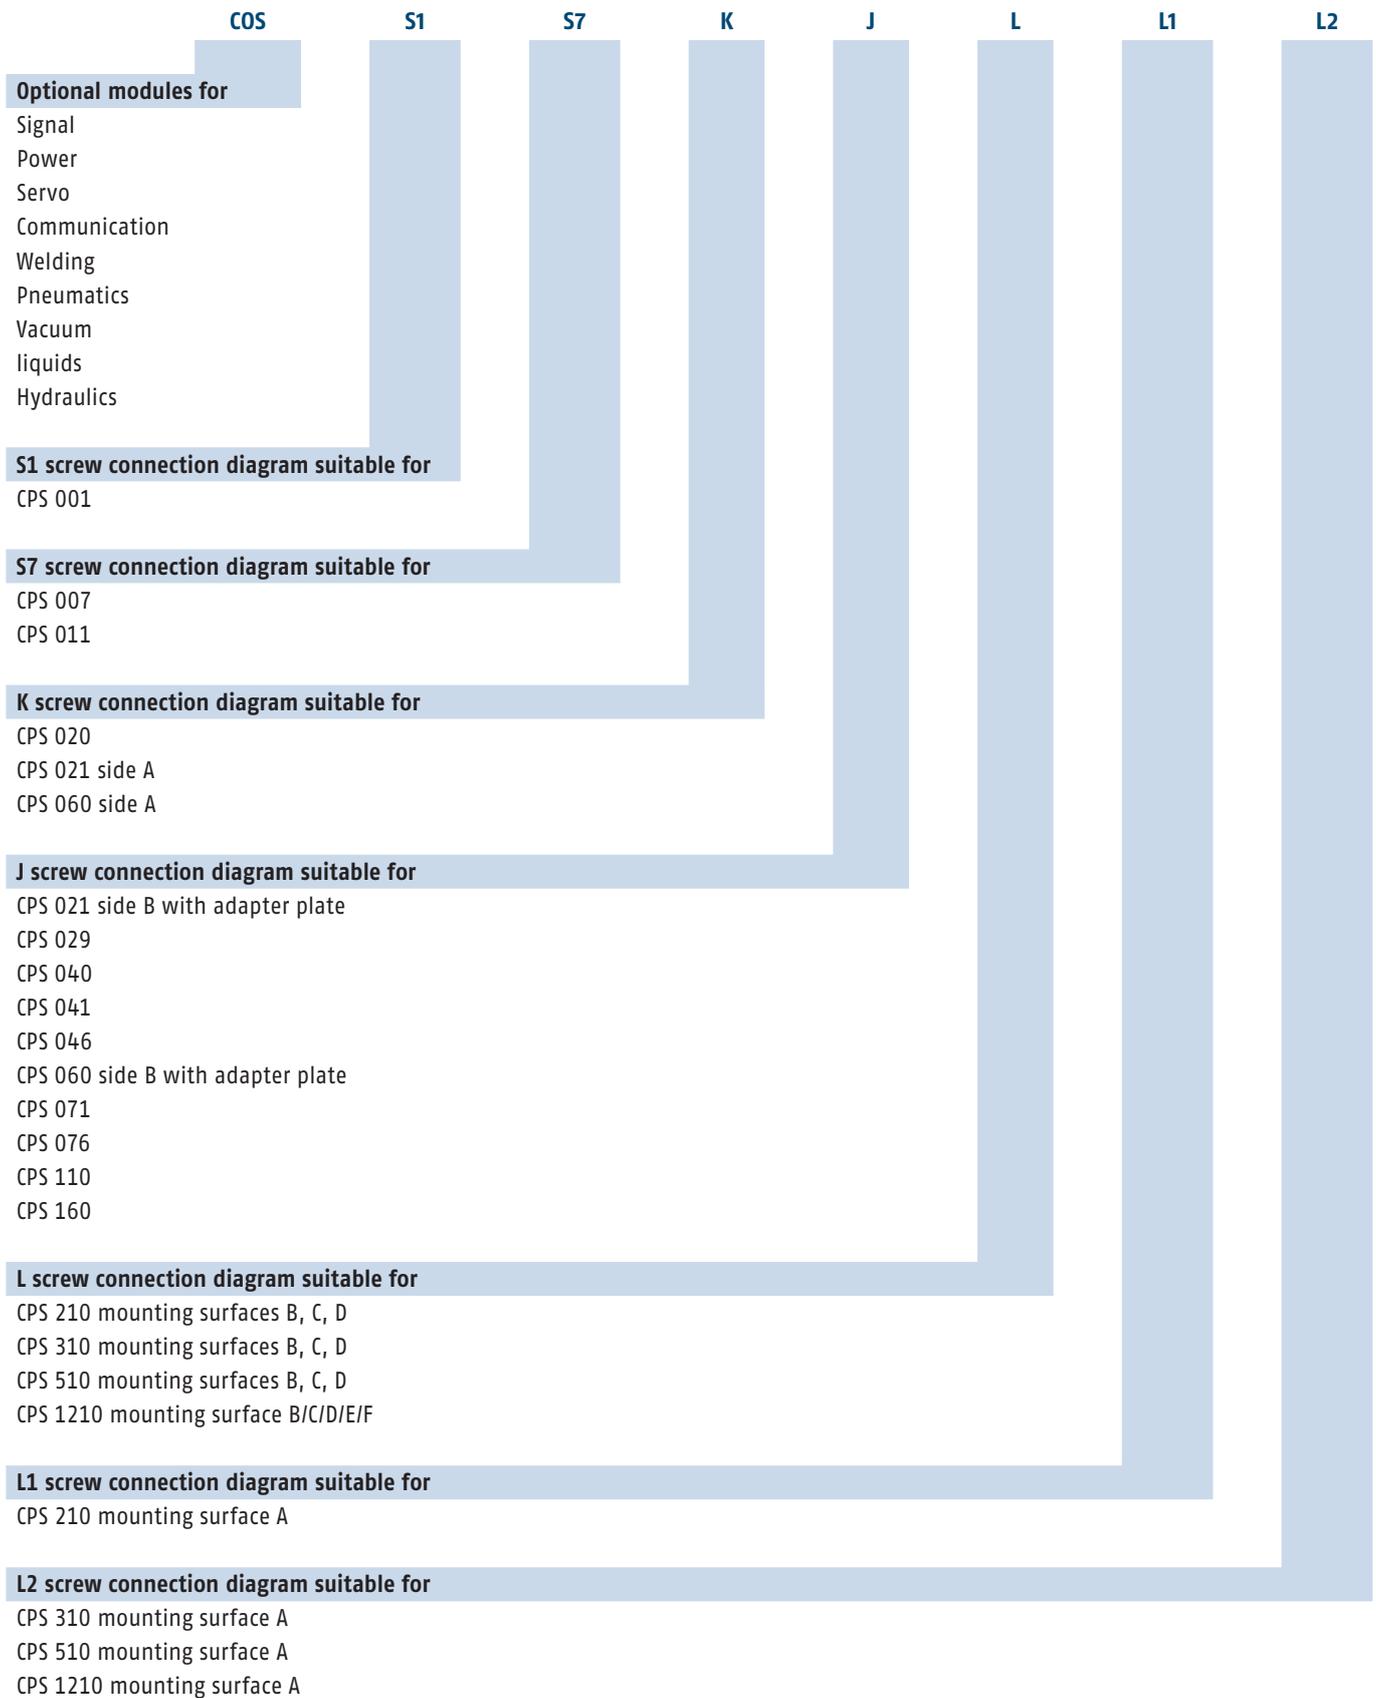

Special designs with modified seals or lubrication are available on request



# COS A15


Feed-through modules



## Technical data

Description		COS A15-K	COS A15-A
ID		1586965	1586966
Suitable on		Change head	Tool
Screw connection diagram		S7	S7
Transmission type		Signal	Signal
Weight	[kg]	0.02	0.02
Min./max. ambient temperature	[°C]	5/60	5/60
Number of pin contacts		15	15
Nominal current	[A]	2	2
Alternating voltage	[V AC]	50	50
Direct voltage	[V DC]	50	50
Electrical connection		D-sub connecting plug	D-sub connector
Outlet connection		radial	radial


## Combination COS A15-K and COS A15-A

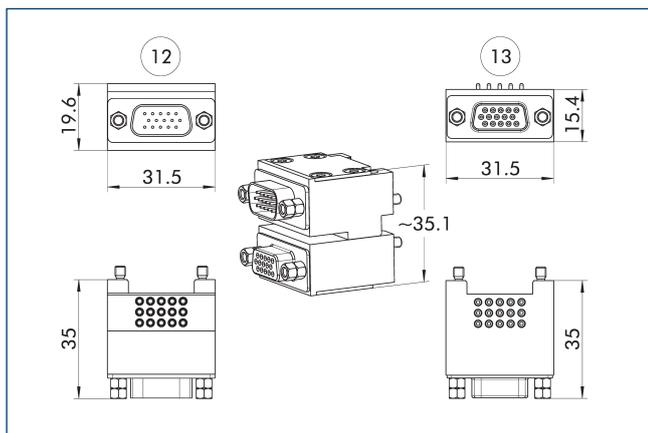

12 Master side

13 Adapter side

## Pin assignment for COS A15-K and COS A15-A

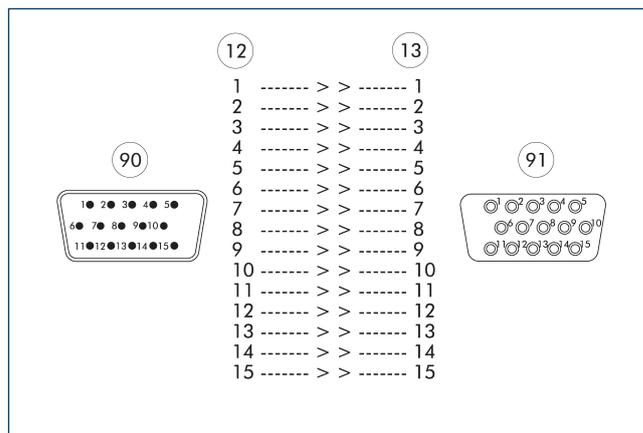


12 Master side

13 Adapter side

90 D-sub connecting plug

91 D-sub connector

## Cable connector

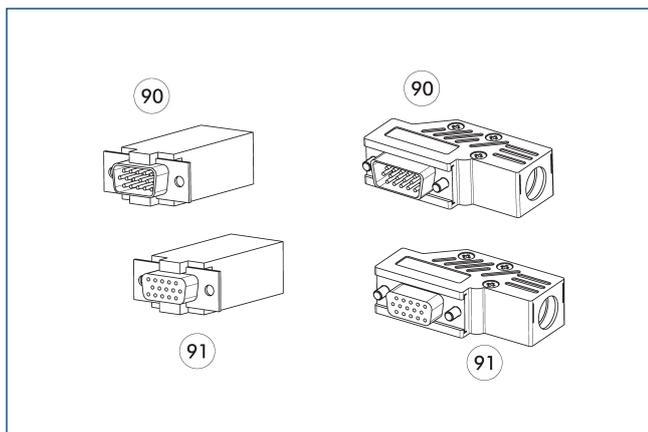

90 D-sub connecting plug

91 D-sub connector

Description	ID
Angled cable connector, robot-side	
KAS-A15-K-90	0301301
Angled cable connector, tool-side	
KAS-A15-A-90	0301302
Straight cable connector, robot-side	
KAS-A15-K-0	0301264
Straight cable connector, tool-side	
KAS-A15-A-0	0301265

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS E06


Feed-through modules



## Technical data

Description		COS E06-K	COS E06-A
ID		1586981	1586969
Suitable on		Change head	Tool
Screw connection diagram		S1	S1
Transmission type		Signal	Signal
Weight	[kg]	0.005	0.005
Min./max. ambient temperature	[°C]	5/60	5/60
Number of pin contacts		6	6
Nominal current	[A]	3	3
Alternating voltage	[V AC]	50	50
Direct voltage	[V DC]	50	50
Electrical connection		Solder contacts	Solder contacts
Outlet connection		axial	axial


Combination COS E06-K and COS E06-A

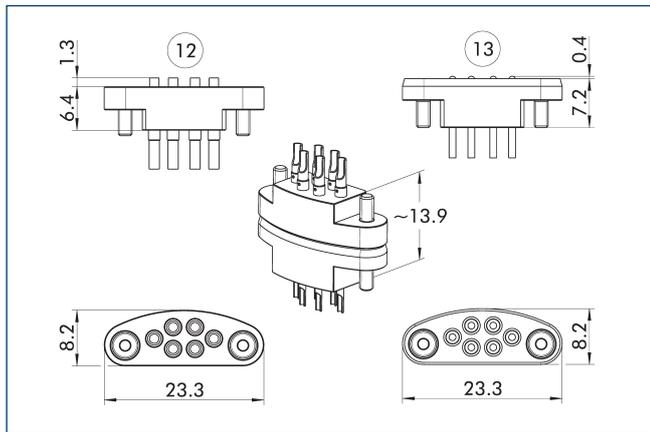

12 Master side

13 Adapter side

Pin assignment for COS E06-K and COS E06-A

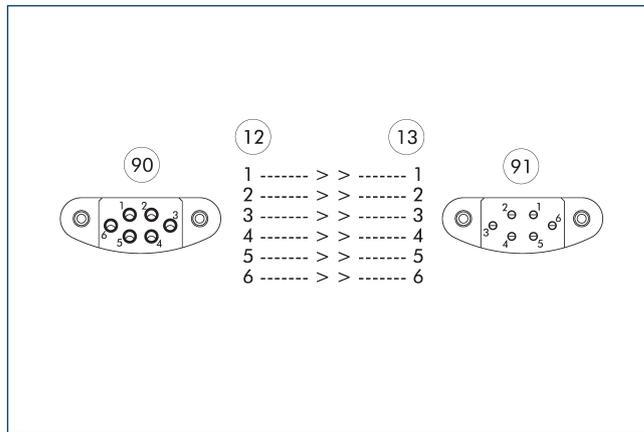

12 Master side

13 Adapter side

90 Solder contacts

91 Solder contacts

# COS E10


Feed-through modules



## Technical data

Description		COS E10-K	COS E10-A
ID		1586985	1586984
Suitable on		Change head	Tool
Screw connection diagram		S7	S7
Transmission type		Signal	Signal
Weight	[kg]	0.009	0.008
Min./max. ambient temperature	[°C]	5/60	5/60
Number of pin contacts		10	10
Nominal current	[A]	3	3
Alternating voltage	[V AC]	50	50
Direct voltage	[V DC]	50	50
Electrical connection		Solder contacts	Solder contacts
Outlet connection		axial	axial


Combination COS E10-K and COS E10-A

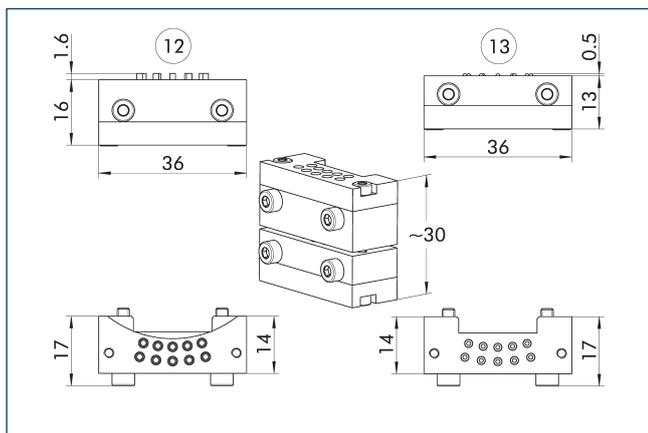

12 Master side

13 Adapter side

Pin assignment for COS E10-K and COS E10-A

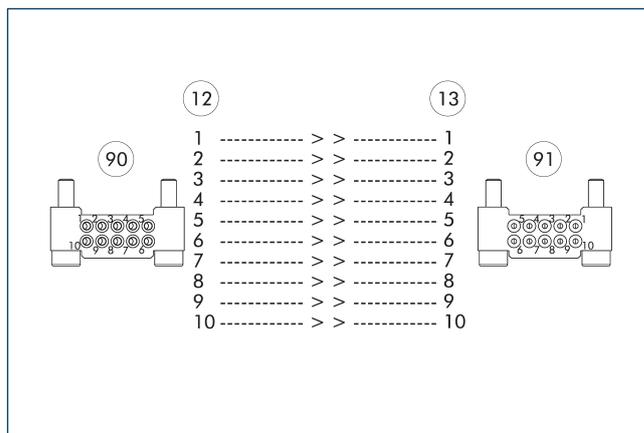

12 Master side

13 Adapter side

90 Solder contacts

91 Solder contacts

# COS E20


Feed-through modules



## Technical data

Description		COS E20-K	COS E20-A
ID		1586987	1586986
Suitable on		Change head	Tool
Screw connection diagram		S7	S7
Transmission type		Signal	Signal
Weight	[kg]	0.015	0.017
Min./max. ambient temperature	[°C]	5/60	5/60
Number of pin contacts		20	20
Nominal current	[A]	3	3
Alternating voltage	[V AC]	50	50
Direct voltage	[V DC]	50	50
Electrical connection		Solder contacts	Solder contacts
Outlet connection		axial	axial


## Combination COS E20-K and COS E20-A

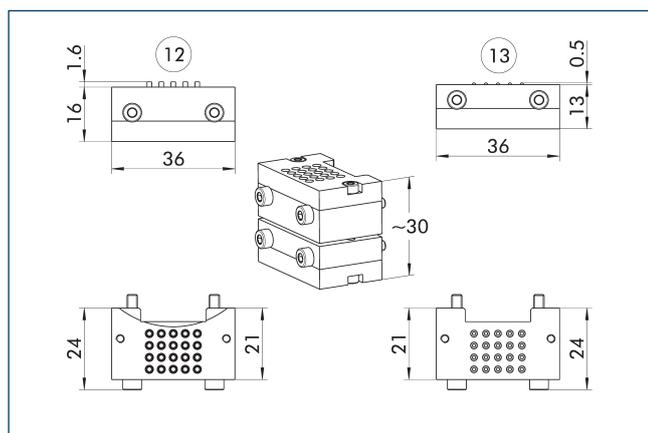

12 Master side

13 Adapter side

## Pin assignment for COS E20-K and COS E20-A

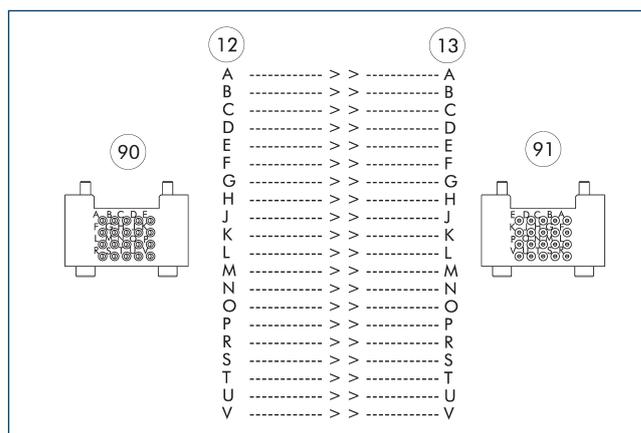

12 Master side

13 Adapter side

90 Solder contacts


91 Solder contacts



### Technical data

Description		COS G19-K	COS G19R-K	COS G19W-K	COS G19-A	COS G14-A
ID		1586544	1586545	1586547	1586543	1586542
Suitable on		Change head	Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J	J
Transmission type		Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.13	0.17	0.17	0.11	0.15
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	15	19	14
Nominal current	[A]	3	3	3	3	3
Alternating voltage	[V AC]	250	250	250	250	250
Direct voltage	[V DC]	250	250	250	250	250
Electrical connection		Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins
Outlet connection		Can be radially swiveled	Can be radially swiveled	Can be radially swiveled	Can be radially swiveled	Can be radially swiveled
Special properties		Can swivel in five positions	Can swivel in five positions, two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Can swivel in five positions, two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Can swivel in five positions	Can be swiveled in five positions, rotary encoder switch for tool coding for 0-15 tools. Designed for max. 0.15 A and 24 V.


Combination COS G19-K and COS G19-A

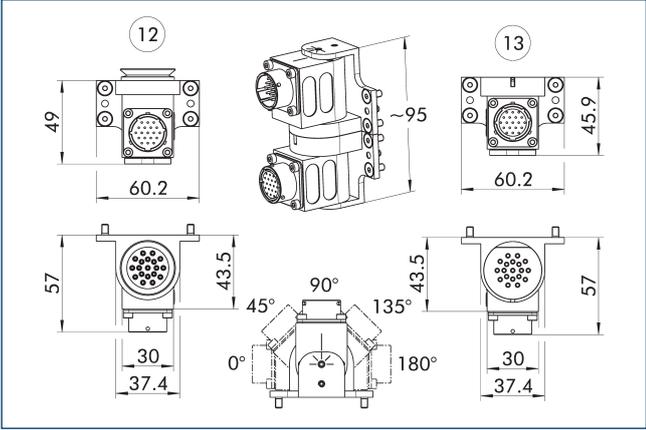

12 Master side

13 Adapter side

Combination possibilities G19

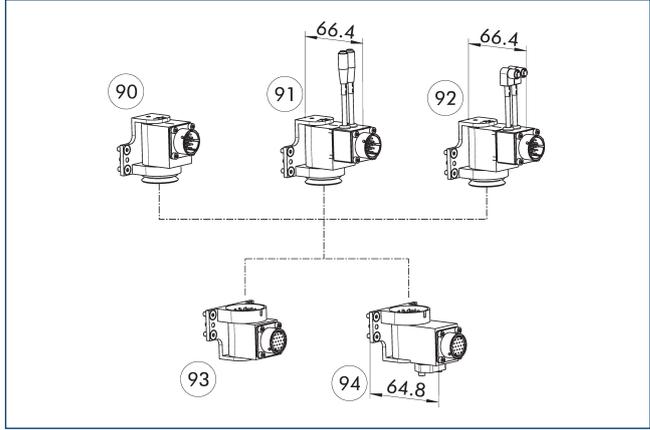

90 COS G19-K


91 COS G19W-K

92 COS G19R-K

93 COS G19-A

94 COS G14-A

Pin assignment for COS G19-K with COS G19-A

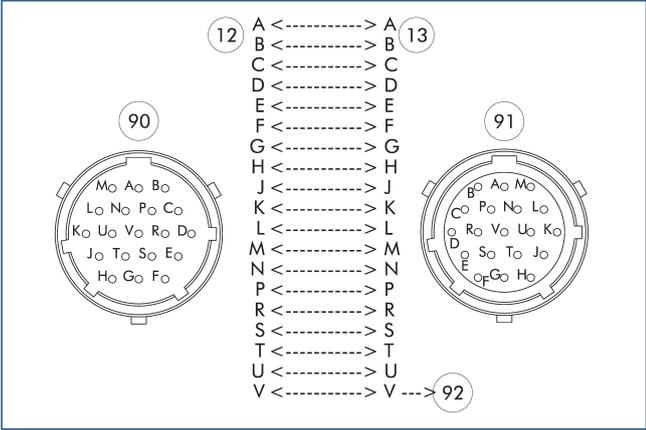

12 Master side


13 Adapter side

90 Amphenol PT bayonet lock connector, 19 pins

91 Amphenol PT bayonet lock socket, 19 pins

92 leading pin

Pin assignment for COS G19R-K and COS G19-A

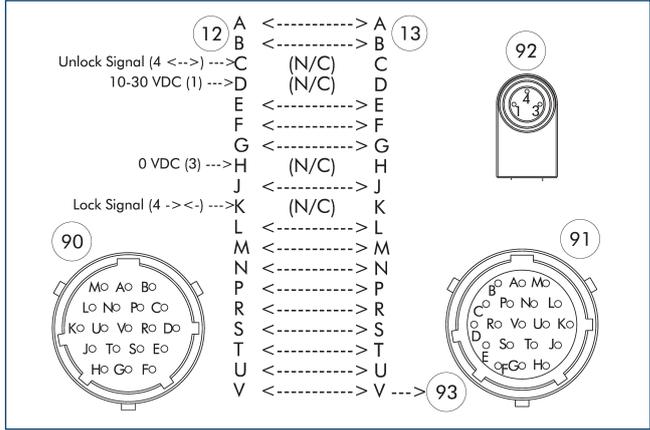

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 19 pins

91 Amphenol PT bayonet lock socket, 19 pins


92 M8 socket, A-coded, 3-pin

93 leading pin

# COS G19


## Feed-through modules

### Pin assignment for COS G19W-K and COS G19-A

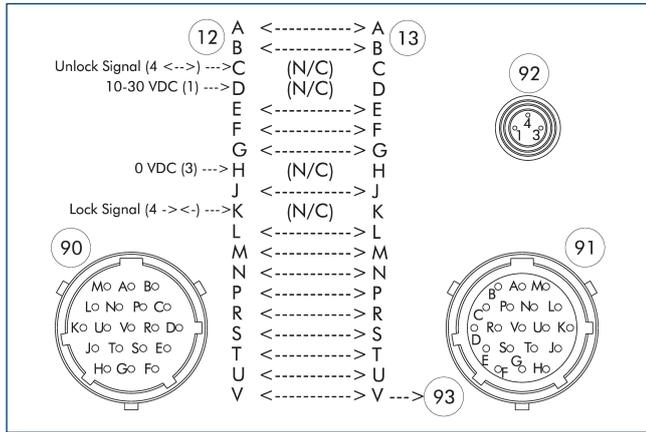


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

### Pin assignment for COS G19-K and COS G14-A

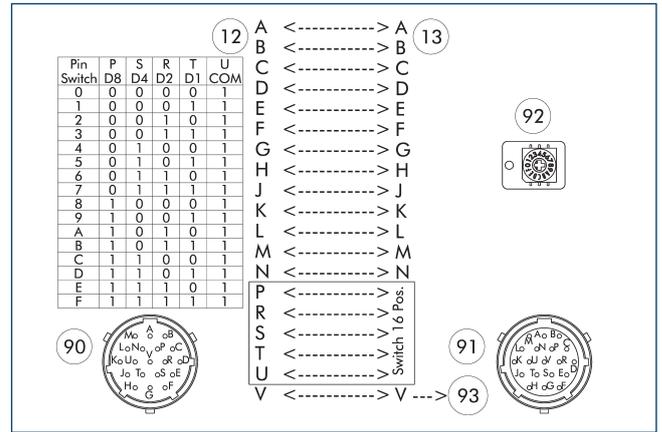

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 Rotary encoder switch for tool coding of 0-15 tools.
- 93 leading pin


### Cover COS JPC-A

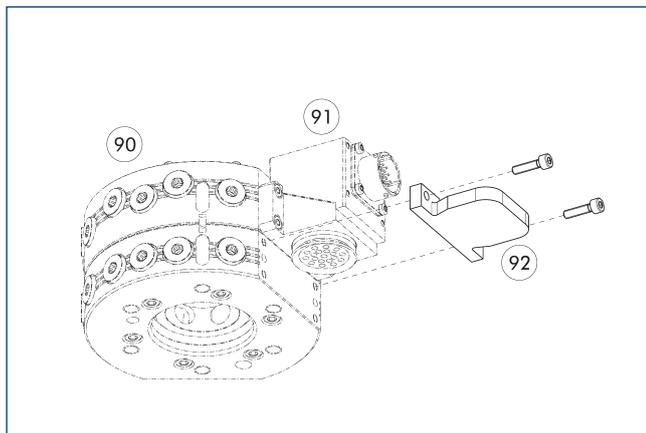

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

**Cable plug/cable extension**

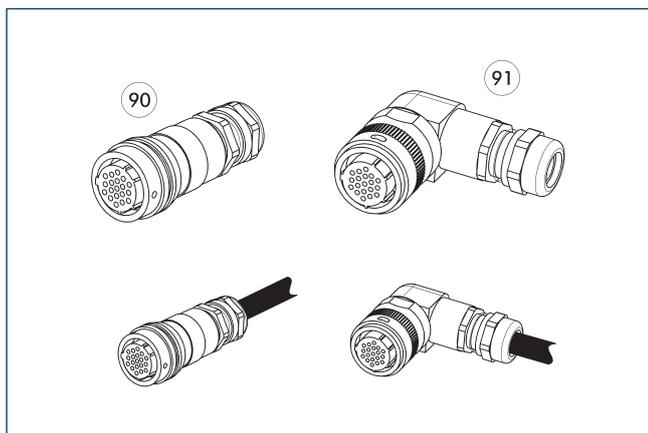

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
<b>Angled cable connector, robot-side</b>		
KAS-19B-K-90-C	0301294	
<b>Angled cable connector, tool-side</b>		
KAS-19B-A-90-C	0301295	
<b>Angled cable connector with cable, robot-side</b>		
KA BW19B-L 19P-0300	0302179	3
KA BW19B-L 19P-0500	0302190	5
<b>Angled cable connector with cable, tool-side</b>		
KA SW19B-L 19P-0300	0302191	3
<b>Straight cable connector, robot-side</b>		
KAS-19B-K-0-C	0301283	
<b>Straight cable connector, tool-side</b>		
KAS-19B-A-0-C	0301284	
<b>Straight cable connector with cable, robot-side</b>		
KA BG19B-L 19P-0300	0302176	3
KA BG19B-L 19P-0500	0302177	5
<b>Straight cable connector with cable, tool-side</b>		
KA SG19B-L 19P-0300	0302178	3


① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



### Technical data

Description		COS G26-K	COS G26R-K	COS G26W-K	COS G26-A	COS G21-A
ID		1586550	1586551	1586552	1586549	1586548
Suitable on		Change head	Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J	J
Transmission type		Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.14	0.2	0.2	0.12	0.16
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		26	22	22	26	21
Nominal current	[A]	3	3	3	3	3
Alternating voltage	[V AC]	250	250	250	250	250
Direct voltage	[V DC]	250	250	250	250	250
Electrical connection		Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins
Outlet connection		Can be radially swiveled	Can be radially swiveled	Can be radially swiveled	Can be radially swiveled	Can be radially swiveled
Special properties		Can swivel in five positions	Can swivel in five positions, two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Can swivel in five positions, two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Can swivel in five positions	Can be swiveled in five positions, rotary encoder switch for tool coding for 0-15 tools. Designed for max. 0.15 A and 24 V.


Combination COS G26-K and COS G26-A

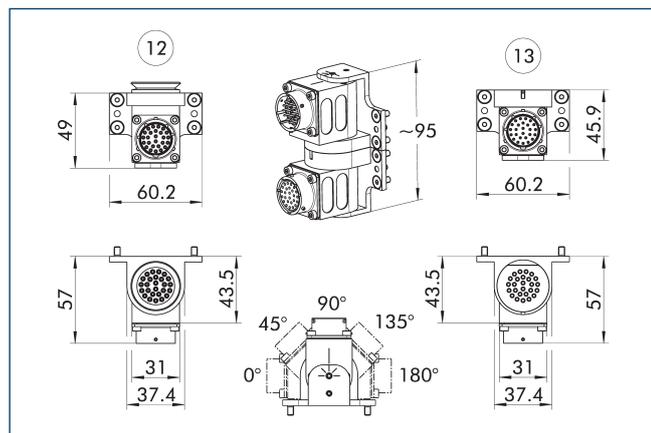

12 Master side

13 Adapter side

Combination possibilities G26

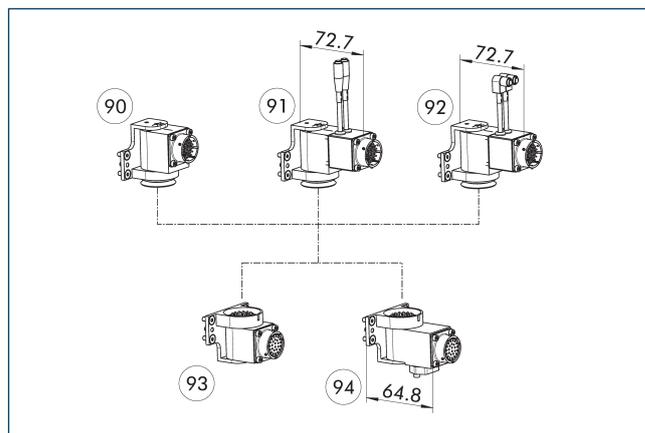

90 COS G26-K


91 COS G26W-K

92 COS G26R-K

93 COS G26-A

94 COS G21-A

Pin assignment for COS G26R-K and COS G26-A

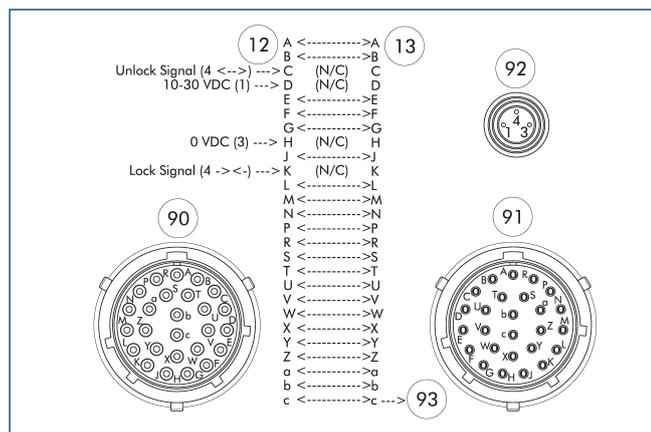

12 Master side

13 Adapter side


90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins

92 M8 socket, A-coded, 3-pin leading pin

93 leading pin

Pin assignment for COS G26W-K and COS G26-A

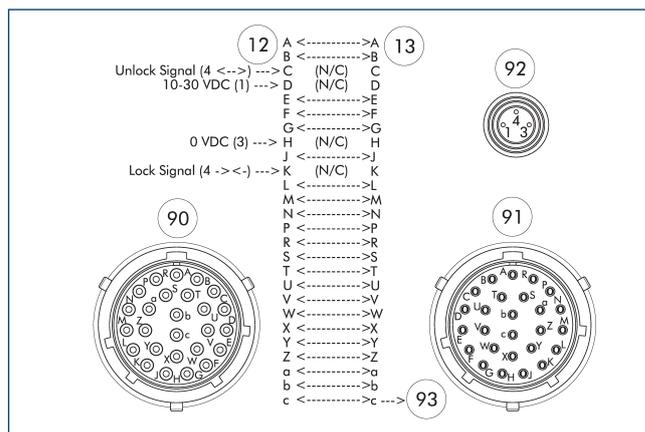

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins


92 M8 socket, A-coded, 3-pin leading pin

93 leading pin

# COS G26


## Feed-through modules

### Pin assignment for COS G26-K and COS G21-A

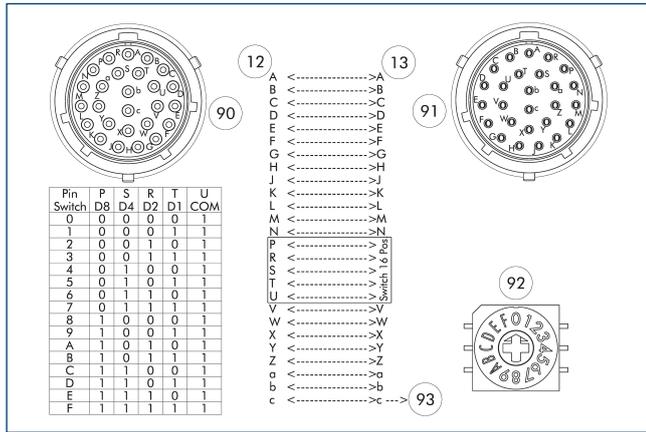


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins
- 92 Rotary encoder switch for tool coding of 0-15 tools.
- 93 leading pin

### Pin assignment for COS G26-K and COS G26-A

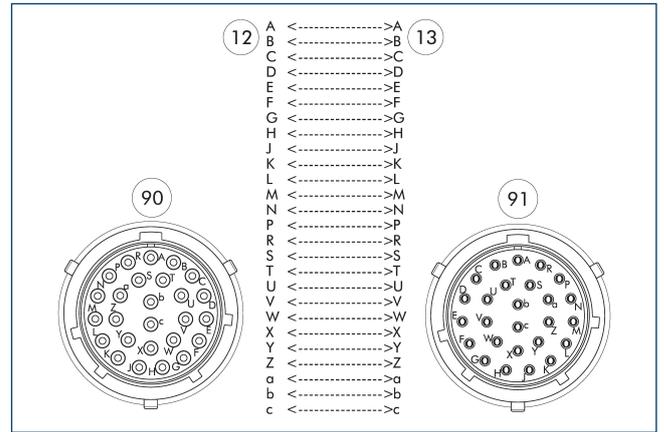

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins


### Cover COS JPC-A

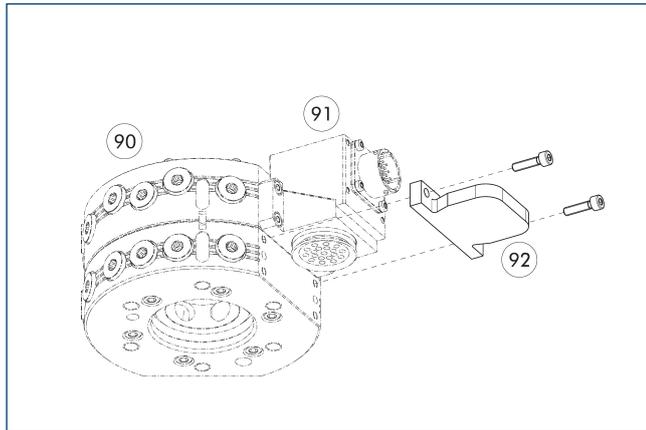

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

**Cable plug/cable extension**

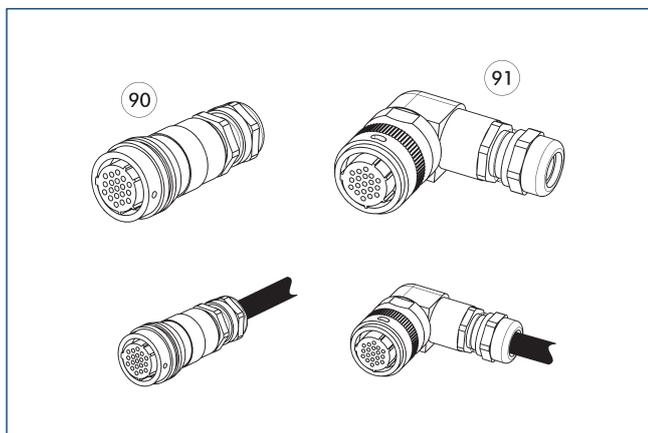

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
<b>Angled cable connector, robot-side</b>		
KAS-26B-K-90-C	0301296	
<b>Angled cable connector, tool-side</b>		
KAS-26B-A-90-C	0301297	
<b>Angled cable connector with cable, robot-side</b>		
KA BW26B-L 26P-0300	0302185	3
KA BW26B-L 26P-0500	0302186	5
<b>Angled cable connector with cable, tool-side</b>		
KA SW26B-L 26P-0300	0302187	3
<b>Straight cable connector, robot-side</b>		
KAS-26B-K-0-C	0301290	
<b>Straight cable connector, tool-side</b>		
KAS-26B-A-0-C	0301291	
<b>Straight cable connector with cable, robot-side</b>		
KA BG26B-L 26P-0300	0302192	3
KA BG26B-L 26P-0500	0302193	5
<b>Straight cable connector with cable, tool-side</b>		
KA SG26B-L 26P-0300	0302184	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS GD4


## Feed-through modules



### Technical data

Description		COS GD4-K	COS GD4-A
ID		1586557	1586556
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.14	0.12
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		4	4
Nominal current	[A]	2	2
Alternating voltage	[V AC]	48	48
Direct voltage	[V DC]	48	48
Electrical connection		M12 connector, A-coded, 4-pin	M12 socket, A-coded, 4-pin
Outlet connection		Can be radially swiveled	Can be radially swiveled
Special properties		Can swivel in five positions	Can swivel in five positions


## Combination COS GD4-K and COS GD4-A

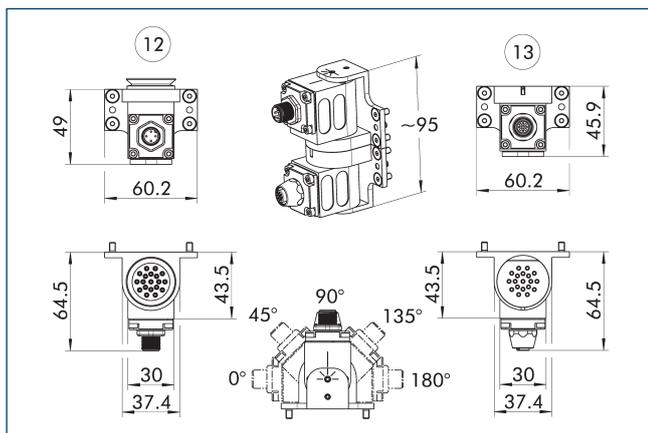

12 Master side

13 Adapter side

## Pin assignment for COS GD4-K and COS GD4-A

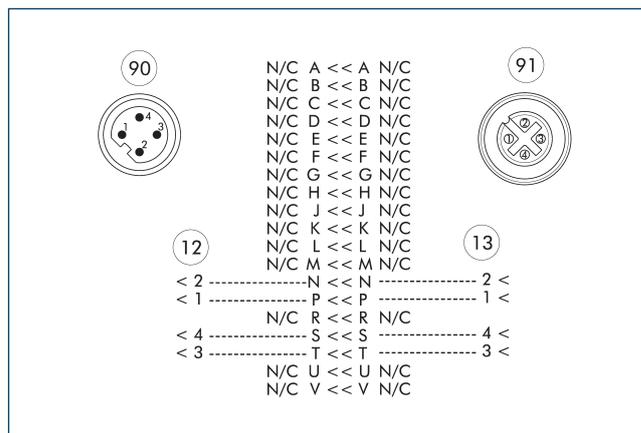


12 Master side

13 Adapter side

90 M12 connector, A-coded, 4-pin

91 M12 socket, A-coded, 4-pin

## Cover COS JPC-A

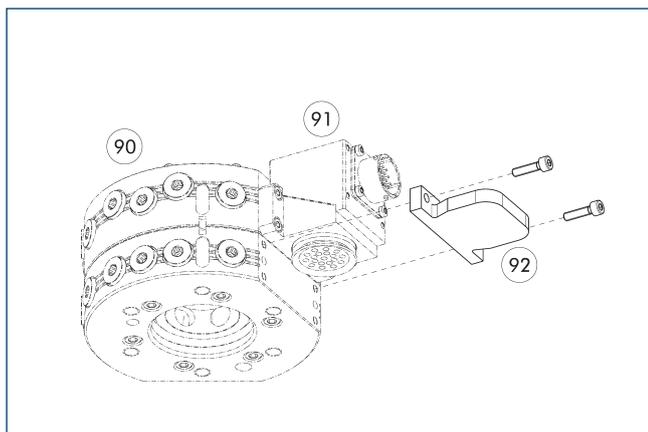

90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

# COS GF19


Feed-through modules



## Technical data

Description		COS GF19-K	COS GF19W-K	COS GF19-A	COS GF14-A
ID		1586570	1586572	1586559	1586558
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J
Transmission type		Signal	Signal	Signal	Signal
Weight	[kg]	0.13	0.17	0.12	0.14
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	19	14
Nominal current	[A]	3	3	3	3
Alternating voltage	[V AC]	30	30	30	30
Direct voltage	[V DC]	30	30	30	30
Electrical connection		M16 connector, 19-pin	M16 connector, 19-pin	M16 socket, 19-pin	M16 socket, 19-pin
Outlet connection		Can be radially swiveled	Can be radially swiveled	Can be radially swiveled	Can be radially swiveled
Special properties		Can swivel in five positions	Can swivel in five positions, two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Can swivel in five positions	Can be swiveled in five positions, rotary encoder switch for tool coding for 0-15 tools. Designed for max. 0.15 A and 24 V.


Combination COS GF19-K and COS GF19-A

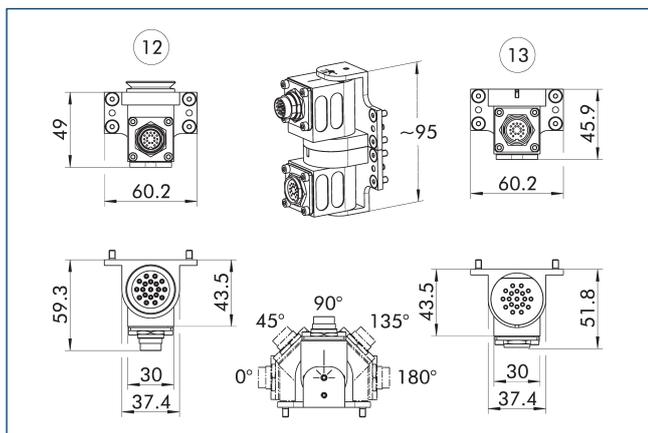

12 Master side

13 Adapter side

Combination possibilities GF19

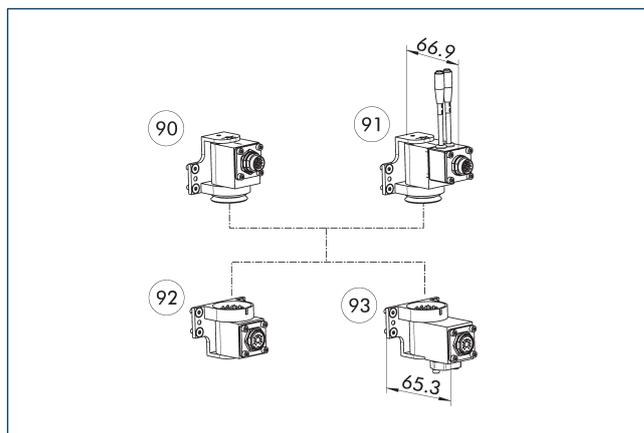


90 COS GF19-K

91 COS GF19W-K

92 COS GF19-A

93 COS GF14-A

Pin assignment for COS GF19-K and COS GF19-A

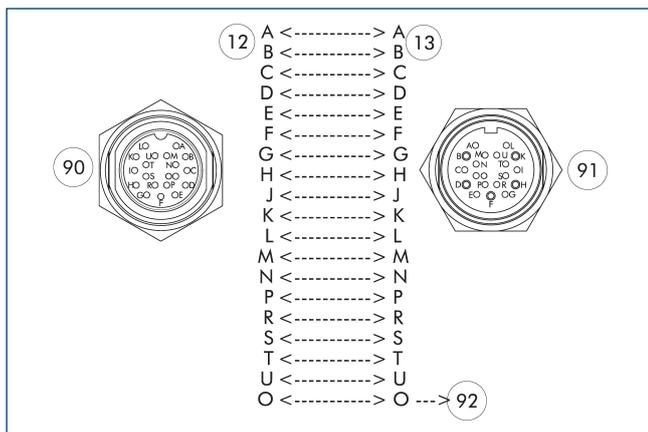

12 Master side


13 Adapter side

90 M16 connector, 19-pin

91 M16 socket, 19-pin

92 leading pin

Pin assignment for COS GF19-K and COS GF14-A

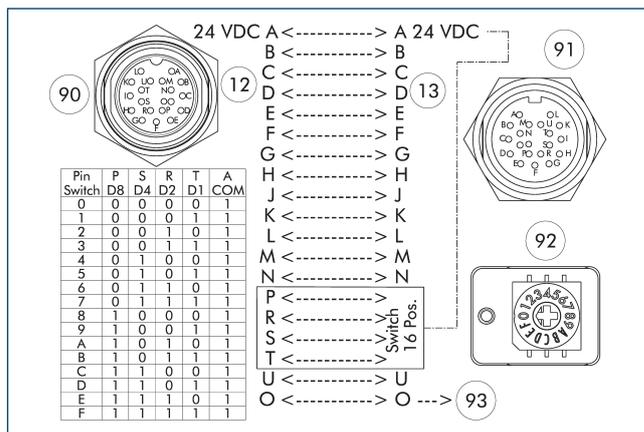

12 Master side

13 Adapter side

90 M16 connector, 19-pin

91 M16 socket, 19-pin


92 Rotary encoder switch for tool coding of 0-15 tools.

93 leading pin

# COS GF19


Feed-through modules

## Pin assignment for COS GF19W-K and COS GF19-A

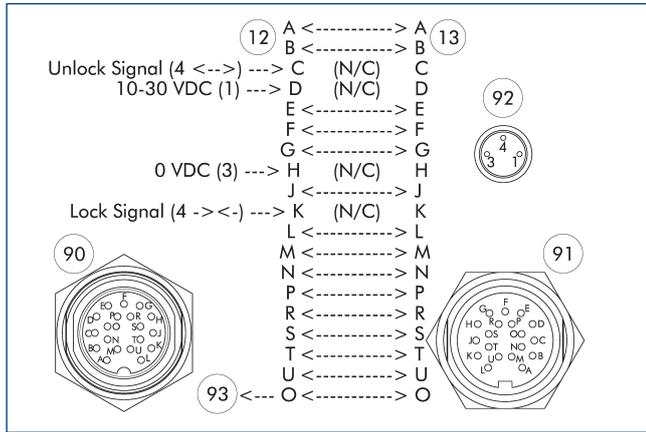

- 12 Master side
- 13 Adapter side
- 90 M16 connector, 19-pin
- 91 M16 socket, 19-pin
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin


## Cover COS JPC-A

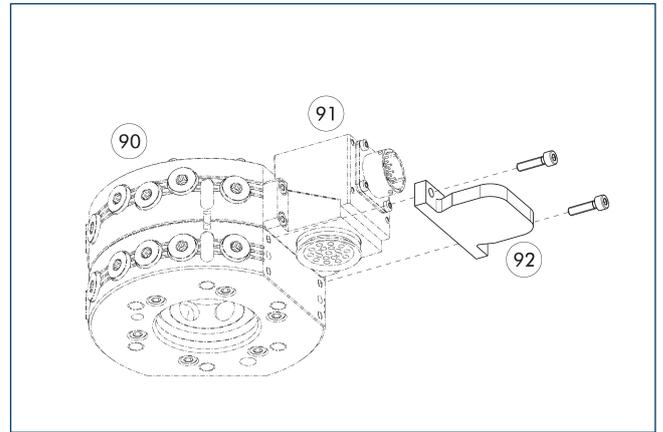

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

## Cable plug/cable extension

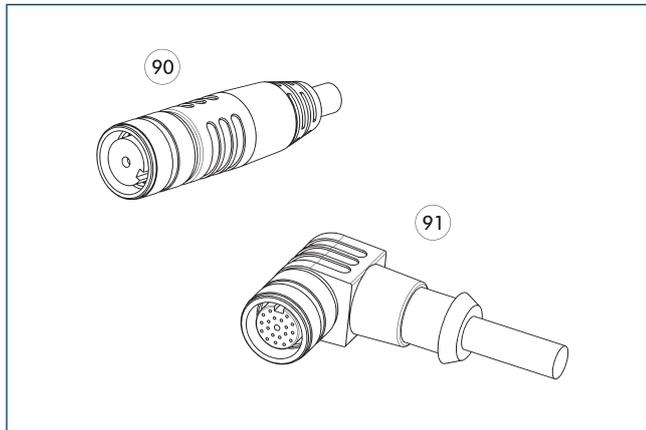

- 90 Connector/straight socket with extension cable
- 91 Connector/angled socket with extension cable

Description	ID	Length
		[m]
Angled cable connector with cable, robot-side		
KA BW19F-L 19P-0500	0302172	5
KA BW19F-L 19P-1000	0302173	10
Angled cable connector with cable, tool-side		
KA SW19F-L 19P-0300	0302175	3
Straight cable connector with cable, robot-side		
KA BG19F-L 19P-0500	0302170	5
KA BG19F-L 19P-1000	0302171	10
Straight cable connector with cable, tool-side		
KA SG19F-L 19P-0300	0302174	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS K19

## Feed-through modules



### Technical data


Description		COS K19-K	COS K19P-K	COS K19W-K	COS K19-KIT-K	COS K19-A	COS K19-KIT-A
ID		1586384	1586389	1586394	1586387	1586381	1586386
Suitable on		Change head	Change head	Change head	Change head	Tool	Tool
Screw connection diagram		K	K	K	K	K	K
Transmission type		Signal	Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.1	0.12	0.11	0.1	0.11	0.11
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	15	19	19	19
Nominal current	[A]	3	3	3	3	3	3
Alternating voltage	[V AC]	50	50	50	250	50	250
Direct voltage	[V DC]	50	50	50	250	50	250
Electrical connection		Amphenol PT bayonet lock connector, 19 pins	Amphenol PT bayonet lock connector, 19 pins	Amphenol PT bayonet lock connector, 19 pins		Amphenol PT bayonet lock socket, 19 pins	
Outlet connection		radial	radial	radial		radial	
Electrical connection					M16 cable gland for Ø 5 – 10 mm		M16 cable gland for Ø 5 – 10 mm
Special properties			Two sockets (A-coded, 3-pin) integrated in the module housing for connection of locking and unlocking sensor.	Two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.		The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.

Description		COS K14-A
ID		1586379
Suitable on		Tool
Screw connection diagram		K
Transmission type		Signal
Weight	[kg]	0.11
Min./max. ambient temperature	[°C]	5/60
Protection class IP		IP64 (only in a coupled state)
Number of pin contacts		14
Nominal current	[A]	3
Alternating voltage	[V AC]	50
Direct voltage	[V DC]	50
Electrical connection		Amphenol PT bayonet lock socket, 19 pins
Outlet connection		radial
Special properties		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.

# COS K19

Feed-through modules


## Combination COS K19-K and COS K19-A

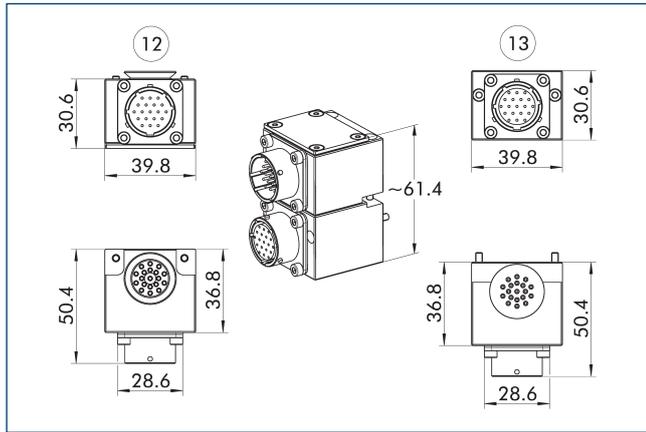

12 Master side

13 Adapter side


## Combination COS K19-Kit-K and COS K19-Kit-A

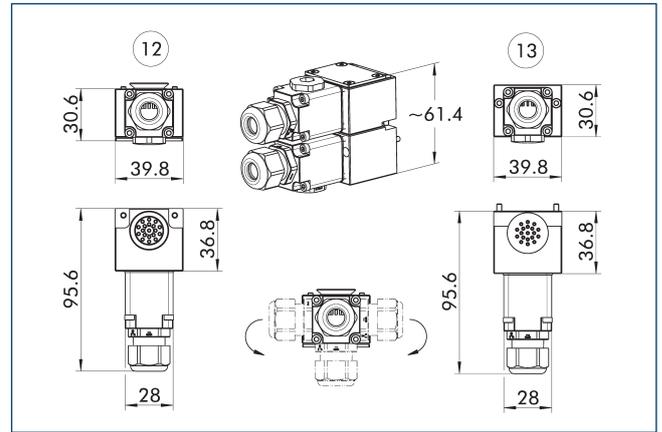

12 Master side

13 Adapter side

## Combination possibilities K19

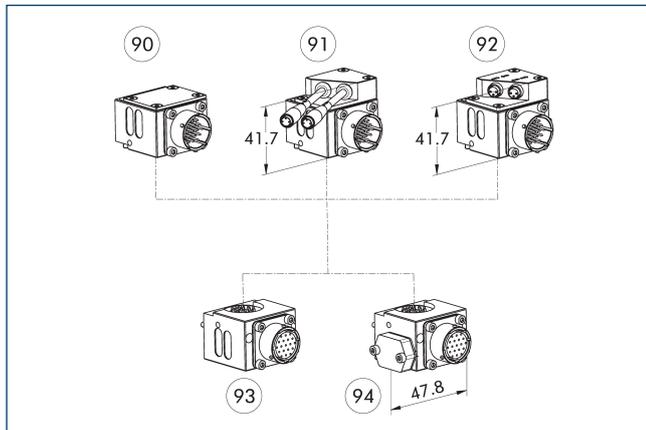

90 COS K19-K

93 COS K19-A

91 COS K19W-K

94 COS K14-A

92 COS K19P-K

## Pin assignment for COS K19-K and COS K14-A

Pin Switch	P D8	S D4	R D2	T D1	U COM
0	0	0	0	0	1
1	0	0	0	1	1
2	0	0	1	0	1
3	0	0	1	1	1
4	0	1	0	0	1
5	0	1	0	1	1
6	0	1	1	0	1
7	0	1	1	1	1
8	1	0	0	0	1
9	1	0	0	1	1
A	1	0	1	0	1
B	1	0	1	1	1
C	1	1	0	0	1
D	1	1	0	1	1
E	1	1	1	0	1
F	1	1	1	1	1

Pin assignment diagram showing connections between Master side (12) and Adapter side (13) pins A-V. The adapter side includes a rotary encoder switch (92) for tool coding of 0-15 tools. The master side includes an Amphenol PT bayonet lock connector (90) and a leading pin (93).

12 Master side

91 Amphenol PT bayonet lock socket, 19 pins


13 Adapter side

90 Amphenol PT bayonet lock connector, 19 pins

92 Rotary encoder switch for tool coding of 0-15 tools.


93 leading pin

Pin assignment for COS K19-K and COS K19-A

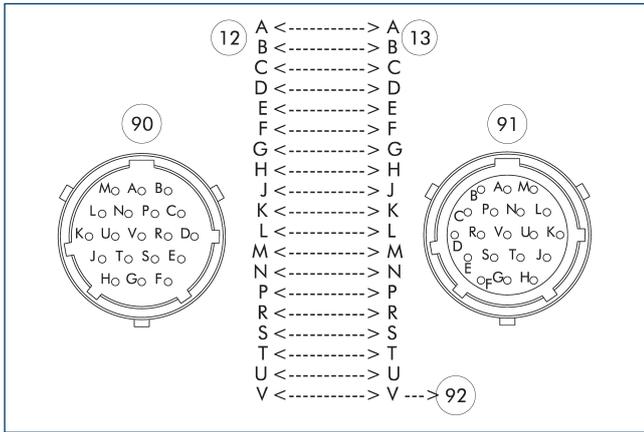


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 leading pin

Pin assignment for COS K19W-K and COS K19-A

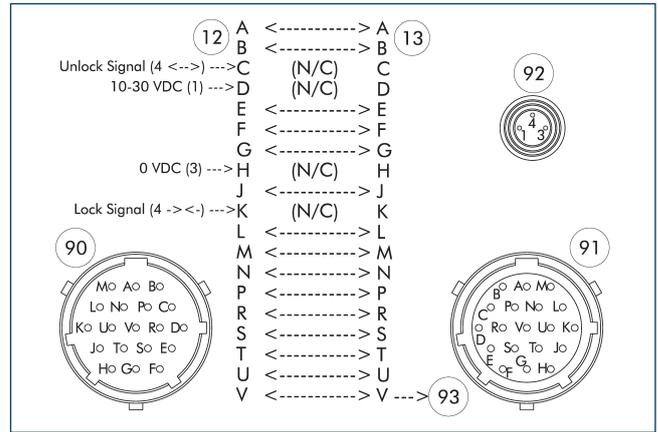

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin


Cover COS KPC-A

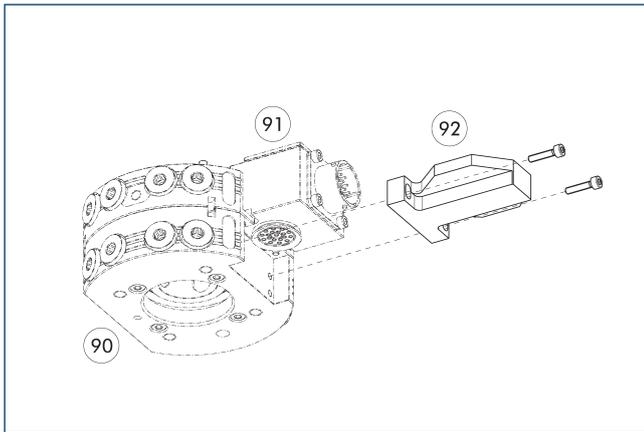

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS KPC-A

Description	ID	Suitable for
Cover		
COS KPC-A	1585142	Many electrical modules with screw-on pattern K

### Cable plug/cable extension

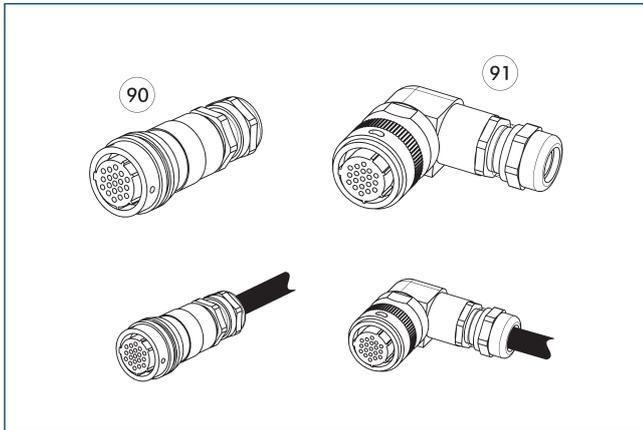

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
<b>Angled cable connector, robot-side</b>		
KAS-19B-K-90-C	0301294	
<b>Angled cable connector, tool-side</b>		
KAS-19B-A-90-C	0301295	
<b>Angled cable connector with cable, robot-side</b>		
KA BW19B-L 19P-0300	0302179	3
KA BW19B-L 19P-0500	0302190	5
<b>Angled cable connector with cable, tool-side</b>		
KA SW19B-L 19P-0300	0302191	3
<b>Straight cable connector, robot-side</b>		
KAS-19B-K-0-C	0301283	
<b>Straight cable connector, tool-side</b>		
KAS-19B-A-0-C	0301284	
<b>Straight cable connector with cable, robot-side</b>		
KA BG19B-L 19P-0300	0302176	3
KA BG19B-L 19P-0500	0302177	5
<b>Straight cable connector with cable, tool-side</b>		
KA SG19B-L 19P-0300	0302178	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS K26


## Feed-through modules



### Technical data

Description		COS K26-K	COS K26P-K	COS K26-A	COS K21-A
ID		1586398	1586410	1586397	1586395
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		K	K	K	K
Transmission type		Signal	Signal	Signal	Signal
Weight	[kg]	0.1	0.13	0.11	0.11
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		26	22	26	21
Nominal current	[A]	3	3	3	3
Alternating voltage	[V AC]	50	50	50	50
Direct voltage	[V DC]	50	50	50	50
Electrical connection		Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins
Outlet connection		radial	radial	radial	radial
Special properties			Two sockets (A-coded, 3-pin) integrated in the module housing for connection of locking and unlocking sensor.		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.


Combination COS K26-K and COS K26-A

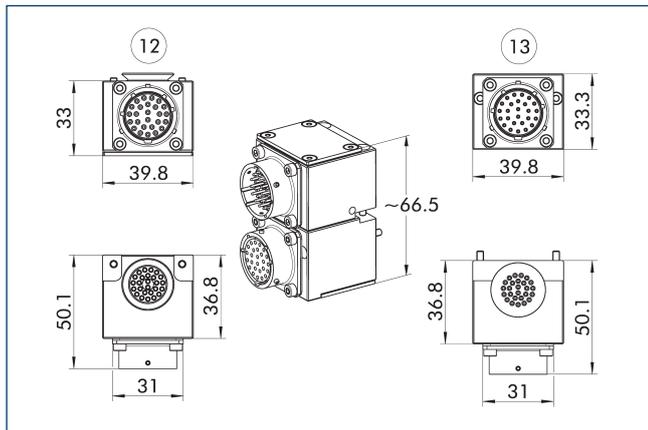

12 Master side

13 Adapter side


Combination possibilities K26

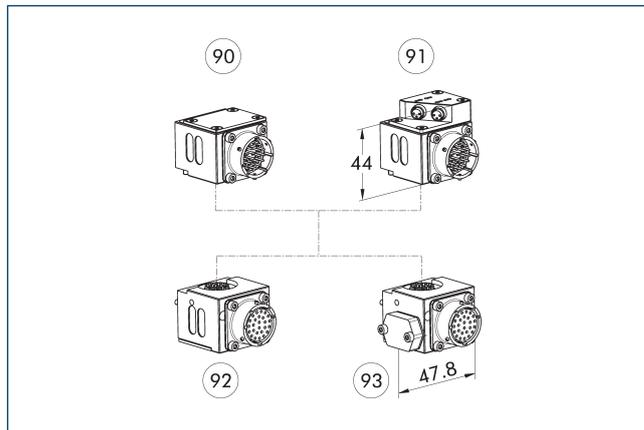

90 COS K26-K  
91 COS K26P-K

92 COS K26-A  
93 COS K21-A

Pin assignment for COS K26P-K and COS K26-A

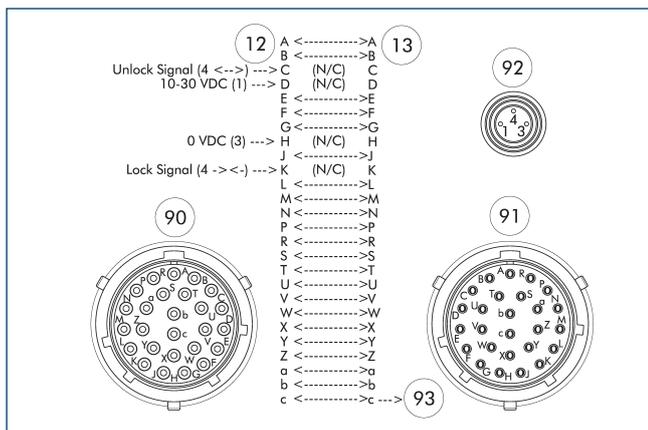

12 Master side


13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins

92 M8 socket, A-coded, 3-pin leading pin

Pin assignment for COS K26-K and COS K21-A

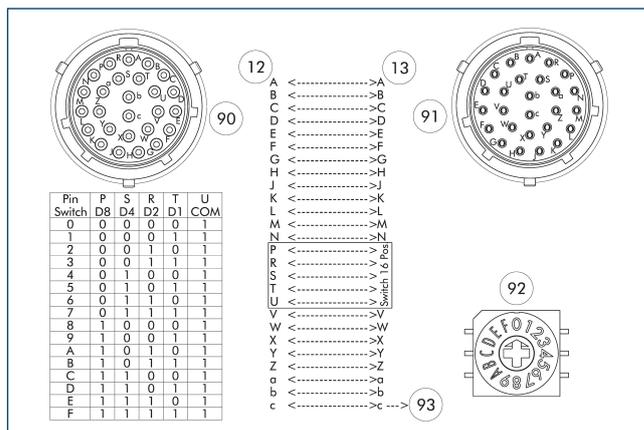

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins


92 Rotary encoder switch for tool coding of 0-15 tools.

93 leading pin

# COS K26


Feed-through modules

## Pin assignment for COS K26-K with COS K26-A

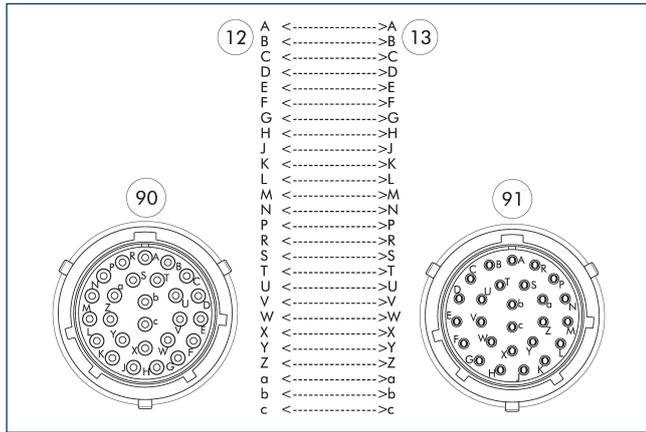

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins


## Cover COS KPC-A

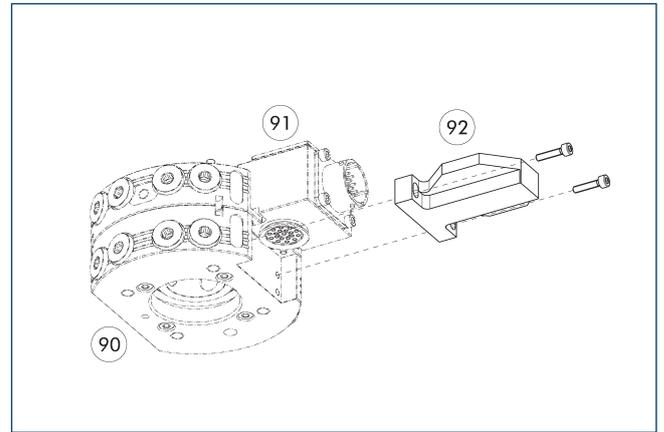

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS KPC-A

Description	ID	Suitable for
Cover		
COS KPC-A	1585142	Many electrical modules with screw-on pattern K

**Cable plug/cable extension**

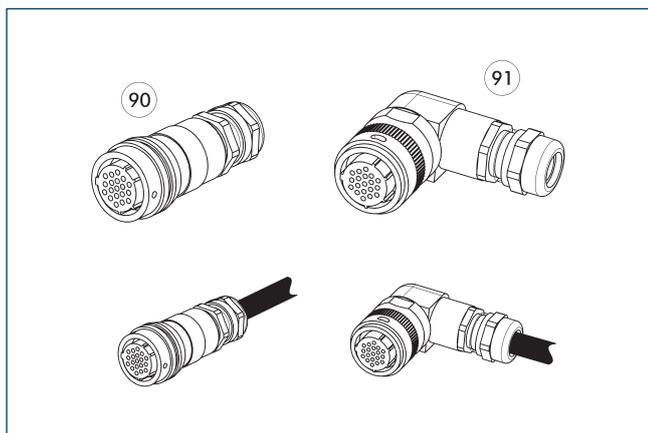

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
<b>Angled cable connector, robot-side</b>		
KAS-26B-K-90-C	0301296	
<b>Angled cable connector, tool-side</b>		
KAS-26B-A-90-C	0301297	
<b>Angled cable connector with cable, robot-side</b>		
KA BW26B-L 26P-0300	0302185	3
KA BW26B-L 26P-0500	0302186	5
<b>Angled cable connector with cable, tool-side</b>		
KA SW26B-L 26P-0300	0302187	3
<b>Straight cable connector, robot-side</b>		
KAS-26B-K-0-C	0301290	
<b>Straight cable connector, tool-side</b>		
KAS-26B-A-0-C	0301291	
<b>Straight cable connector with cable, robot-side</b>		
KA BG26B-L 26P-0300	0302192	3
KA BG26B-L 26P-0500	0302193	5
<b>Straight cable connector with cable, tool-side</b>		
KA SG26B-L 26P-0300	0302184	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS KF19


## Feed-through modules



### Technical data

Description		COS KF19-K	COS KF19P-K	COS KF19-A	COS KF14-A
ID		1586452	1586453	1586451	1586429
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		K	K	K	K
Transmission type		Signal	Signal	Signal	Signal
Weight	[kg]	0.1	0.12	0.11	0.11
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	19	14
Nominal current	[A]	3	3	3	3
Alternating voltage	[V AC]	30	30	30	30
Direct voltage	[V DC]	30	30	30	30
Electrical connection		M16 connector, 19-pin	M16 connector, 19-pin	M16 socket, 19-pin	M16 socket, 19-pin
Outlet connection		radial	radial	radial	radial
Special properties			Two sockets (A-coded, 3-pin) integrated in the module housing for connection of locking and unlocking sensor.		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.


Combination COS KF19-K and COS KF19-A

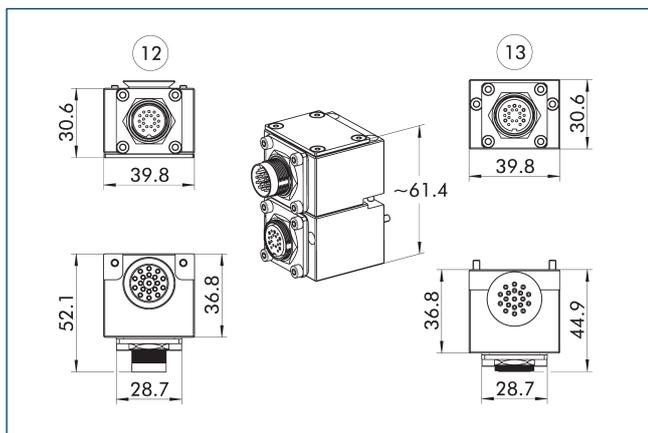

12 Master side

13 Adapter side

Combination possibilities KF19

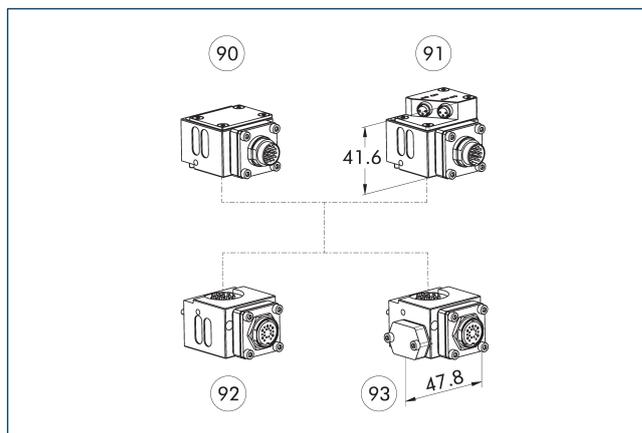


90 COS KF19-K

91 COS KF19P-K

92 COS KF19-A

93 COS KF14-A

Pin assignment for COS KF19-K and COS KF19-A

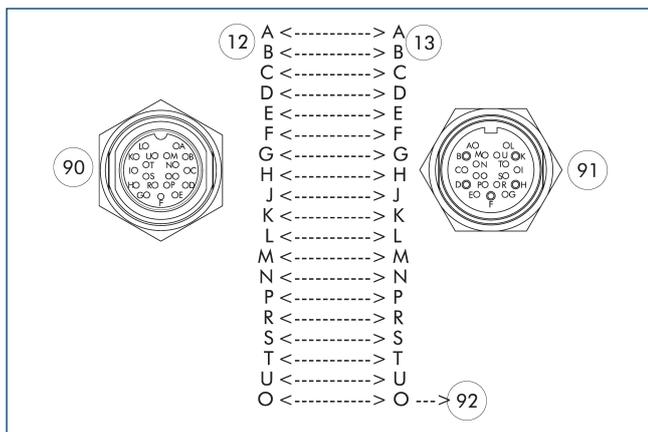

12 Master side


13 Adapter side

90 M16 socket, 19-pin

91 M16 socket, 19-pin

92 leading pin

Pin assignment for COS KF19P-K and COS KF19-A

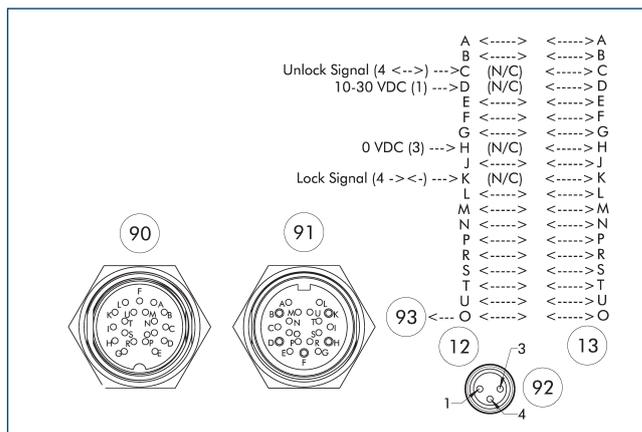

12 Master side

13 Adapter side

90 M16 connector, 19-pin

91 M16 socket, 19-pin


92 M8 socket, A-coded, 3-pin

93 leading pin

# COS KF19


Feed-through modules

## Pin assignment for COS KF19-K and COS KF14-A

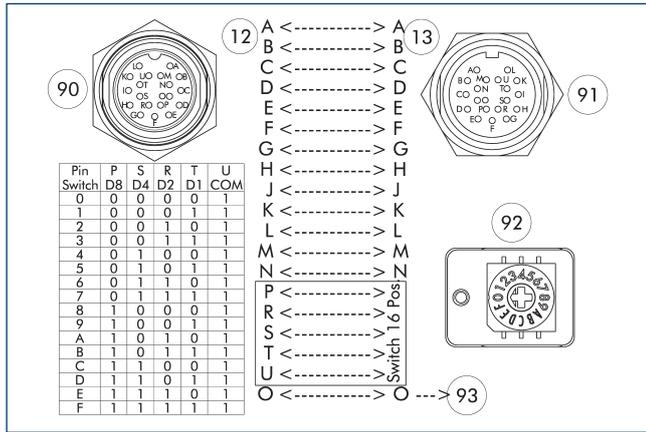

- 12 Master side
- 13 Adapter side
- 90 M16 connector, 19-pin
- 91 M16 socket, 19-pin
- 92 Rotary encoder switch for tool coding of 0-15 tools.
- 93 leading pin


## Cover COS KPC-A

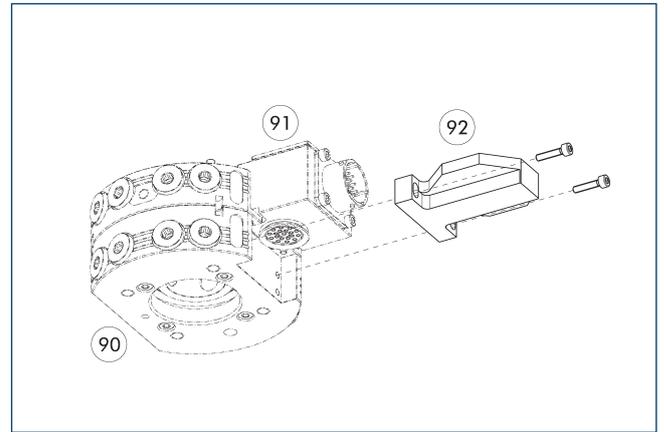

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS KPC-A

Description	ID	Suitable for
Cover		
COS KPC-A	1585142	Many electrical modules with screw-on pattern K

## Cable plug/cable extension

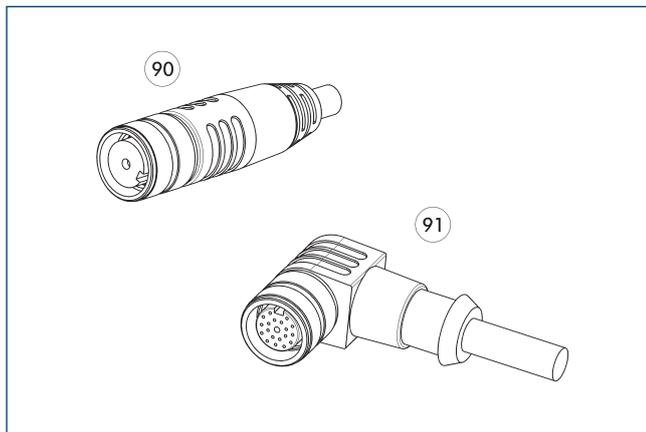

- 90 Connector/straight socket with extension cable
- 91 Connector/angled socket with extension cable

Description	ID	Length
		[m]
Angled cable connector with cable, robot-side		
KA BW19F-L 19P-0500	0302172	5
KA BW19F-L 19P-1000	0302173	10
Angled cable connector with cable, tool-side		
KA SW19F-L 19P-0300	0302175	3
Straight cable connector with cable, robot-side		
KA BG19F-L 19P-0500	0302170	5
KA BG19F-L 19P-1000	0302171	10
Straight cable connector with cable, tool-side		
KA SG19F-L 19P-0300	0302174	3

1 Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS R12


Feed-through modules



## Technical data

Description		COS R12-K	COS R12-A
ID		1586438	1586432
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.11	0.1
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		12	12
Nominal current	[A]	2	2
Alternating voltage	[V AC]	30	30
Direct voltage	[V DC]	30	30
Electrical connection		M12 connector, A-coded, 12-pin	M12 socket, A-coded, 12-pin
Outlet connection		radial	radial


Combination COS R12-K and COS R12-A

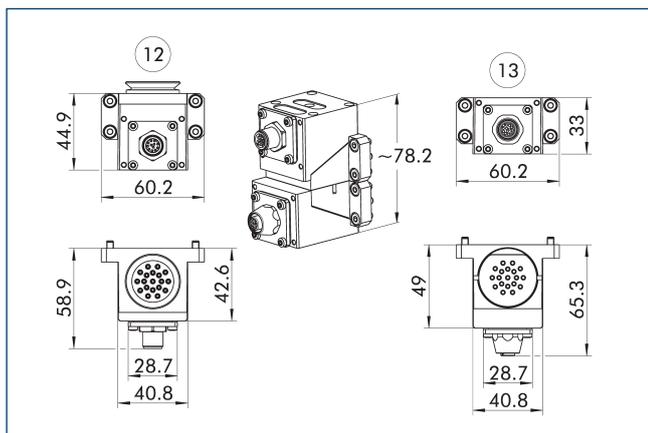

12 Master side

13 Adapter side

Pin assignment for COS R12-K with COS R12-A

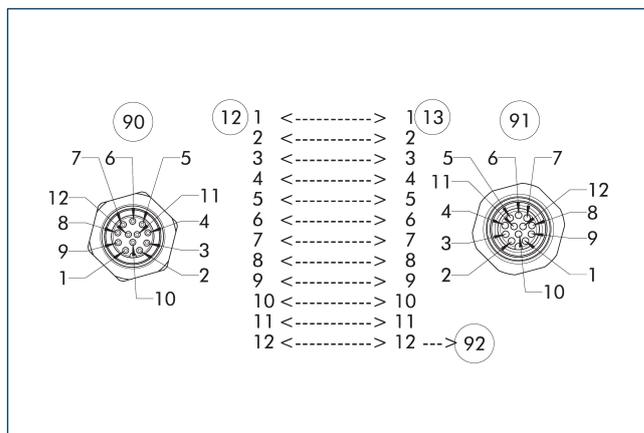

12 Master side


13 Adapter side

90 M12 connector, A-coded, 12-pin

91 M12 socket, A-coded, 12-pin

92 leading pin

Cover COS JPC-A

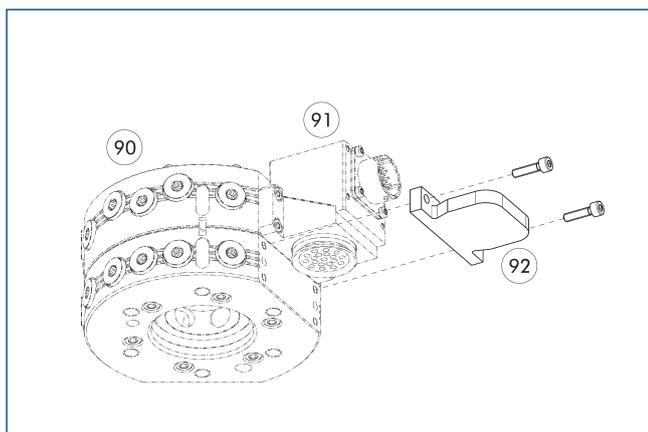


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

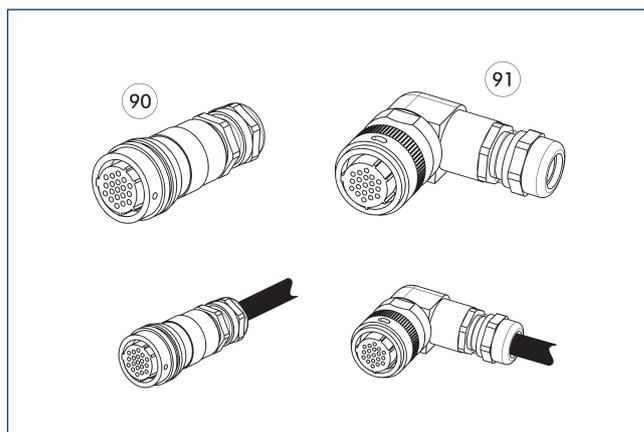

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Cable extension		
KA BG12-L 12P-0500	1324328	
KA BW12-L 12P-0500	1439564	
KA SG12-L 12P-0500	1324332	
KA SW12-L 12P-0500	1439565	

# COS R19

## Feed-through modules



### Technical data


Description		COS R19-K	COS R19R-K	COS R19W-K	COS R19-KIT-K	COS R19-A	COS R19-KIT-A
ID		1586443	1586448	1586472	1586446	1586442	1586445
Suitable on		Change head	Change head	Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J	J	J
Transmission type		Signal	Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.11	0.12	0.12	0.2	0.1	0.14
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	15	19	19	19
Nominal current	[A]	5	5	5	5	5	5
Alternating voltage	[V AC]	250	250	250	250	250	250
Direct voltage	[V DC]	250	250	250	250	250	250
Electrical connection		Amphenol PT bayonet lock connector, 19 pins	Amphenol PT bayonet lock connector, 19 pins	Amphenol PT bayonet lock connector, 19 pins		Amphenol PT bayonet lock socket, 19 pins	
Outlet connection		radial	radial	radial		radial	
Electrical connection					M16 cable gland for Ø 5 – 10 mm		M16 cable gland for Ø 5 – 10 mm
Special properties			Two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.		The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.

Description		COS R14-A	COS R13-A
ID		1586440	1586407
Suitable on		Tool	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.11	0.11
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		14	13
Nominal current	[A]	5	5
Alternating voltage	[V AC]	250	250
Direct voltage	[V DC]	250	250
Electrical connection		Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins
Outlet connection		radial	radial
Special properties		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.	Rotary encoder switch for tool coding for 0-31 tools. Designed for max. 0.15 A and 24 V.

# COS R19

Feed-through modules


## Combination COS R19-K and COS R19-A

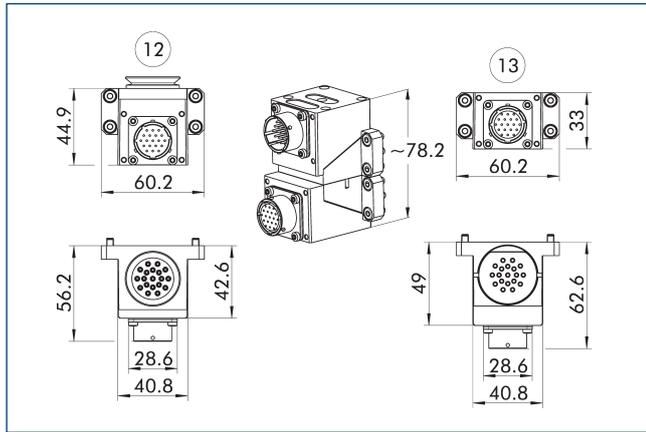

12 Master side

13 Adapter side


## Combination COS R19-Kit-K and COS R19-Kit-A

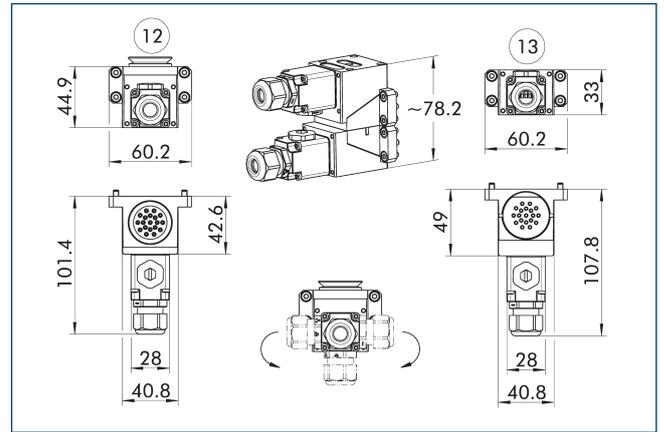

12 Master side

13 Adapter side

## Combination possibilities R19

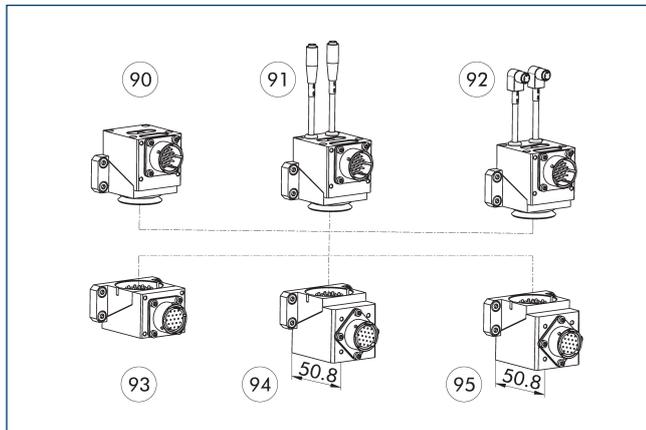

90 COS R19-K

93 COS R19-A


91 COS R19W-K

94 COS R14-A

92 COS R19R-K

95 COS R13-A

## Pin assignment for COS R19W-K with COS R14-A

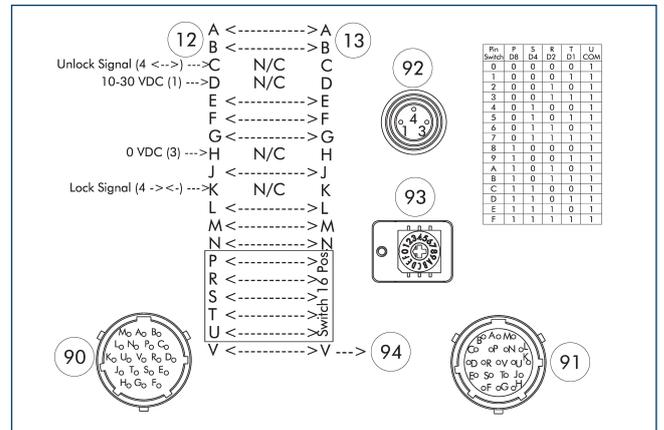

12 Master side

92 M8 socket, A-coded, 3-pin

13 Adapter side


93 Rotary encoder switch for tool coding of 0-15 tools.

90 Amphenol PT bayonet lock connector, 19 pins

94 leading pin


91 Amphenol PT bayonet lock socket, 19 pins

Pin assignment for COS R19W-K with COS R13-A

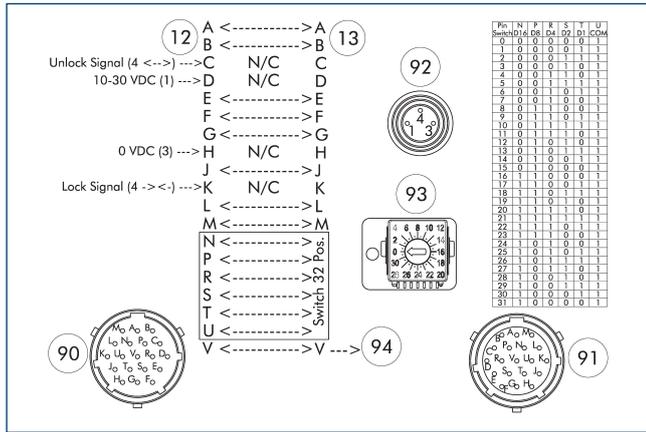


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 Rotary encoder switch for tool coding for 0 - 31 tools.
- 94 leading pin

Pin assignment for COS R19W-K with COS R19-A

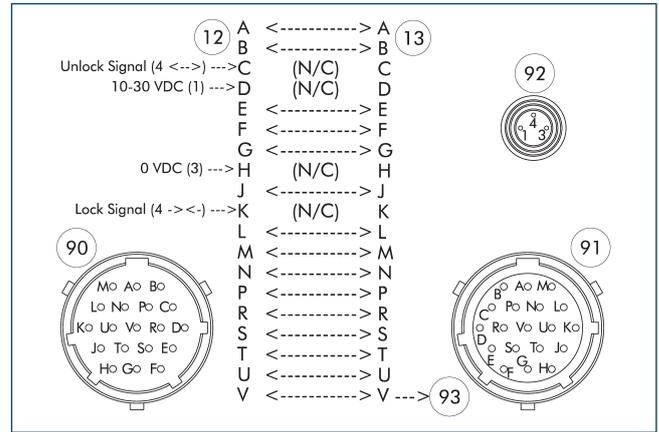


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

Pin assignment for COS R19-K with COS R14-A

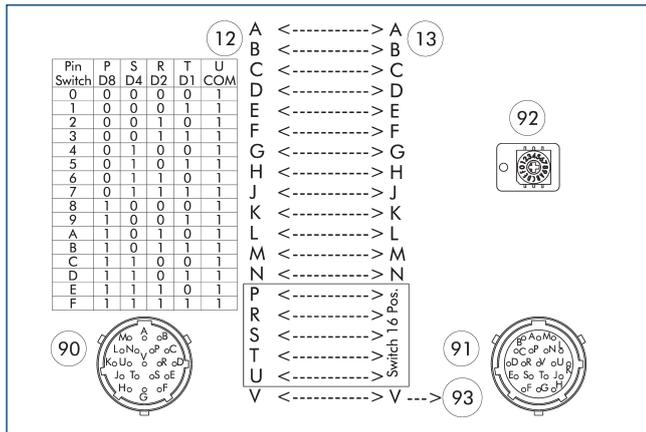

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 Rotary encoder switch for tool coding of 0-15 tools.
- 93 leading pin

Pin assignment for COS R19R-K with COS R19-A

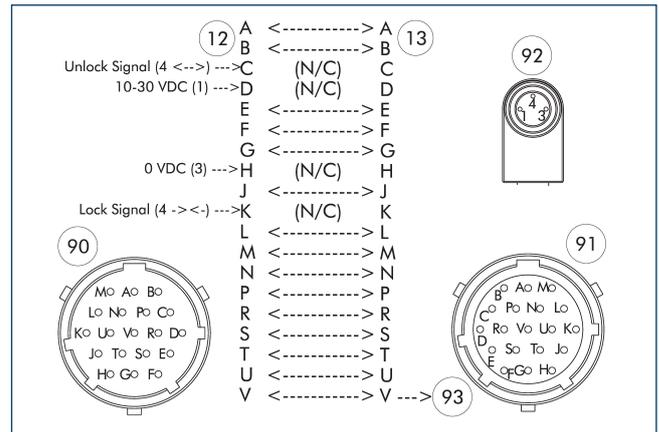


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

# COS R19


Feed-through modules

## Pin assignment for COS R19-K with COS R19-A

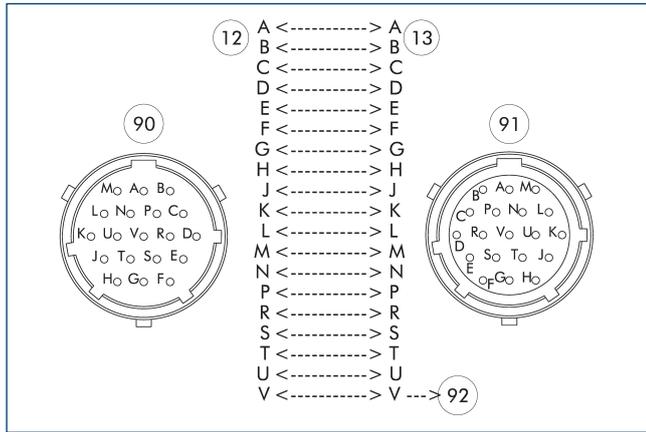

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 19 pins
- 91 Amphenol PT bayonet lock socket, 19 pins
- 92 leading pin


## Cover COS JPC-A

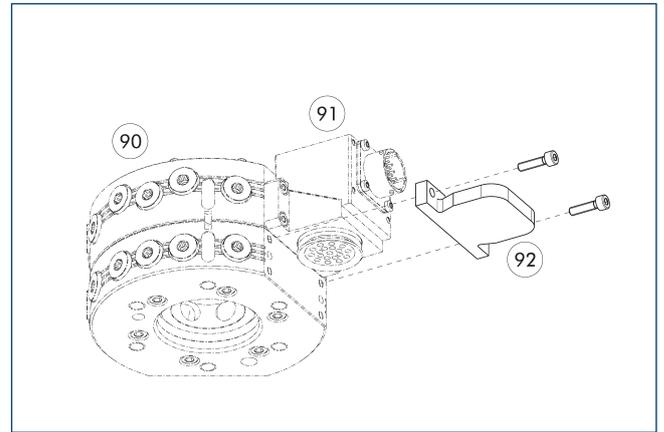

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

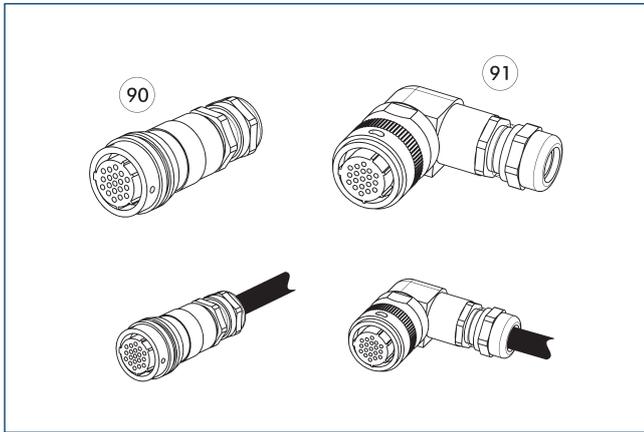

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
Angled cable connector, robot-side		
KAS-19B-K-90-C	0301294	
Angled cable connector, tool-side		
KAS-19B-A-90-C	0301295	
Angled cable connector with cable, robot-side		
KA BW19B-L 19P-0300	0302179	3
KA BW19B-L 19P-0500	0302190	5
Angled cable connector with cable, tool-side		
KA SW19B-L 19P-0300	0302191	3
Straight cable connector, robot-side		
KAS-19B-K-0-C	0301283	
Straight cable connector, tool-side		
KAS-19B-A-0-C	0301284	
Straight cable connector with cable, robot-side		
KA BG19B-L 19P-0300	0302176	3
KA BG19B-L 19P-0500	0302177	5
Straight cable connector with cable, tool-side		
KA SG19B-L 19P-0300	0302178	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS R26


## Feed-through modules



### Technical data

Description		COS R26-K	COS R26R-K	COS R26W-K	COS R26-A	COS R21-A	COS R20-A
ID		1586477	1586498	1586511	1586475	1586474	1586441
Suitable on		Change head	Change head	Change head	Tool	Tool	Tool
Screw connection diagram		J	J	J	J	J	J
Transmission type		Signal	Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.12	0.14	0.14	0.11	0.12	0.12
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		26	22	22	26	21	20
Nominal current	[A]	3	3	3	3	3	3
Alternating voltage	[V AC]	250	250	250	250	250	250
Direct voltage	[V DC]	250	250	250	250	250	250
Electrical connection		Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins	Amphenol PT bayonet lock socket, 26 pins
Outlet connection		radial	radial	radial	radial	radial	radial
Special properties			Two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.	Rotary encoder switch for tool coding for 0-31 tools. Designed for max. 0.15 A and 24 V.


Combination COS R26-K and COS R26-A

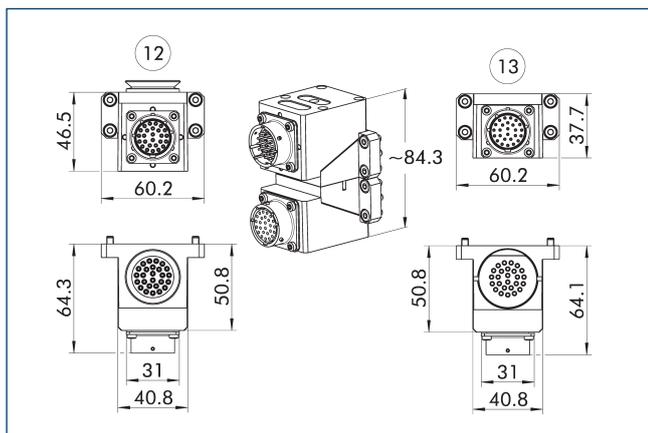

12 Master side

13 Adapter side

Combination possibilities R26

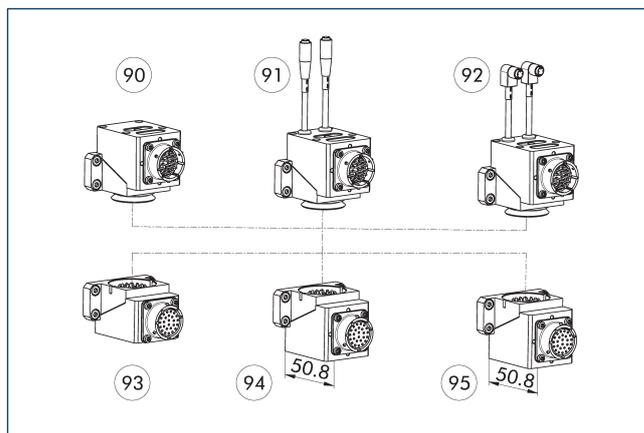

90 COS R26-K

91 COS R26W-K


92 COS R26R-K

93 COS R26-A

94 COS R21-A

95 COS R20-A

Pin assignment for COS R26R-K and COS R26-A

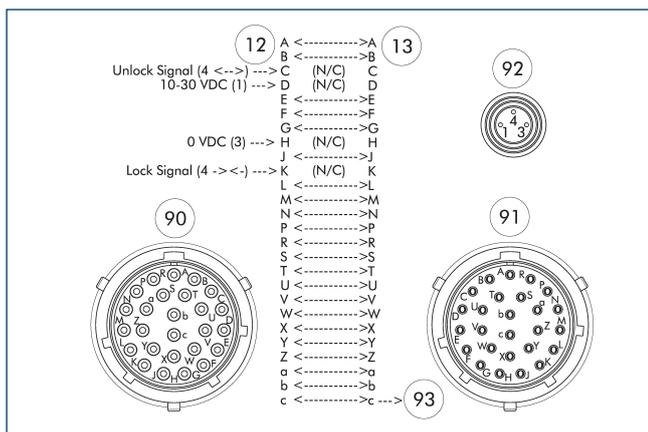

12 Master side


13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins

92 M8 socket, A-coded, 3-pin leading pin

Pin assignment for COS R26-K and COS R20-A

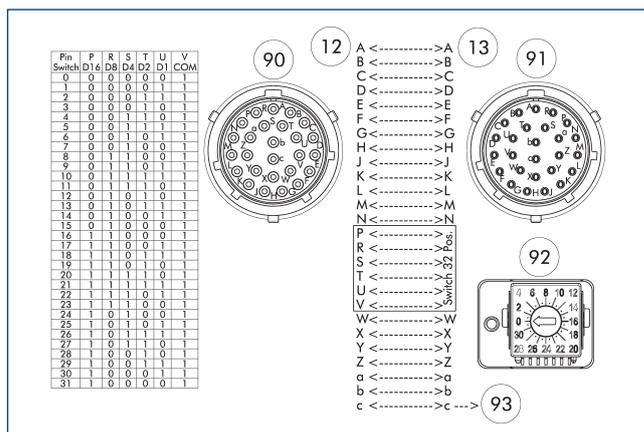

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins


92 Rotary encoder switch for tool coding for 0 - 31 tools.

93 leading pin

# COS R26


## Feed-through modules

### Pin assignment for COS R26-K and COS R26-A

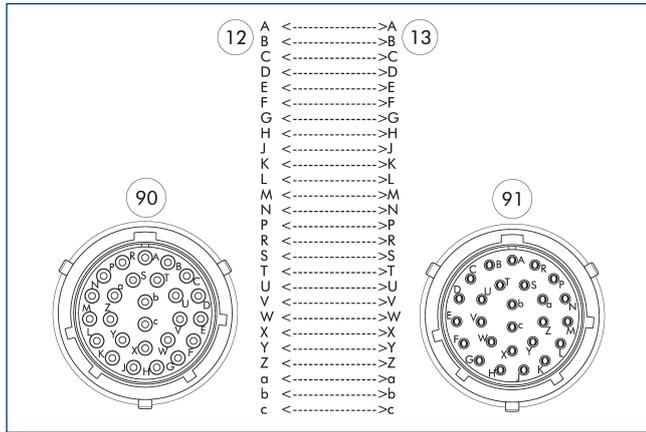


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins

### Pin assignment for COS R26W-K and COS R26-A

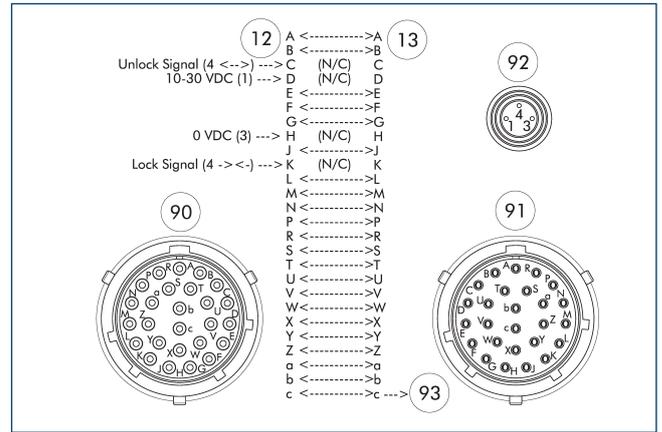


- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

### Pin assignment for COS R26-K and COS R21-A

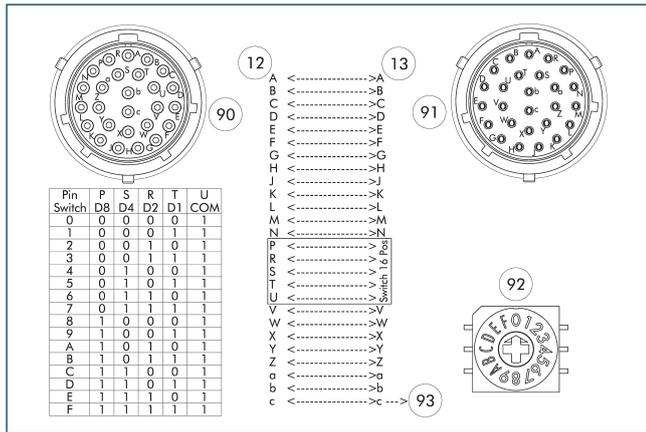

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 26 pins
- 91 Amphenol PT bayonet lock socket, 26 pins
- 92 Rotary encoder switch for tool coding of 0-15 tools.
- 93 leading pin


### Cover COS JPC-A

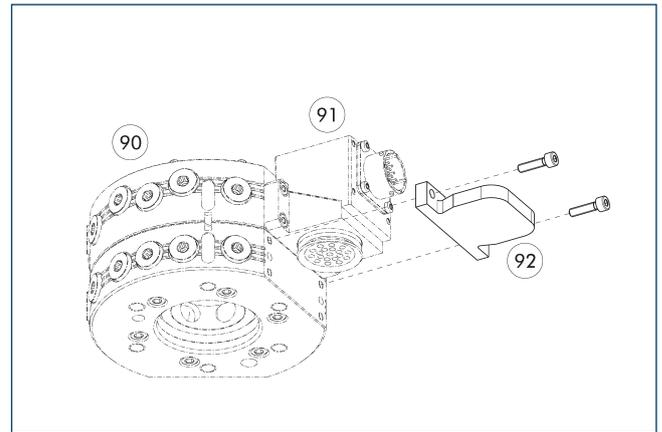

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

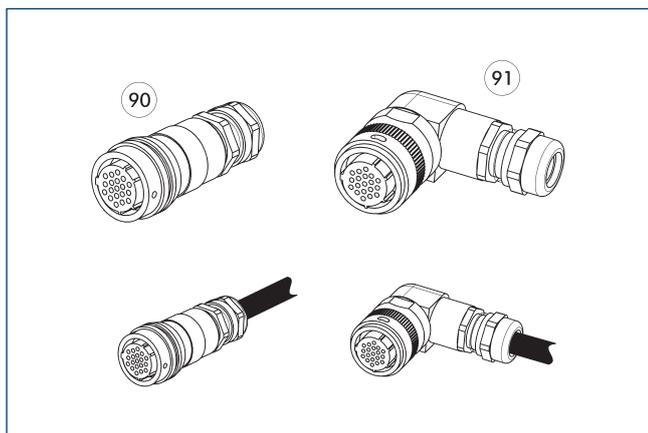

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
Angled cable connector, robot-side		
KAS-26B-K-90-C	0301296	
Angled cable connector, tool-side		
KAS-26B-A-90-C	0301297	
Angled cable connector with cable, robot-side		
KA BW26B-L 26P-0300	0302185	3
KA BW26B-L 26P-0500	0302186	5
Angled cable connector with cable, tool-side		
KA SW26B-L 26P-0300	0302187	3
Straight cable connector, robot-side		
KAS-26B-K-0-C	0301290	
Straight cable connector, tool-side		
KAS-26B-A-0-C	0301291	
Straight cable connector with cable, robot-side		
KA BG26B-L 26P-0300	0302192	3
KA BG26B-L 26P-0500	0302193	5
Straight cable connector with cable, tool-side		
KA SG26B-L 26P-0300	0302184	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS R32


## Feed-through modules



### Technical data

Description		COS R32-K	COS R32R-K	COS R32W-K	COS R32-A
ID		1586518	1586520	1586524	1586512
Suitable on		Change head	Change head	Change head	Tool
Screw connection diagram		J	J	J	J
Transmission type		Signal	Signal	Signal	Signal
Weight	[kg]	0.15	0.16	0.16	0.14
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		32	32	32	32
Nominal current	[A]	3	3	3	3
Alternating voltage	[V AC]	250	250	250	250
Direct voltage	[V DC]	250	250	250	250
Electrical connection		Amphenol PT bayonet lock connector, 36 pins	Amphenol PT bayonet lock connector, 36 pins	Amphenol PT bayonet lock connector, 36 pins	Amphenol PT bayonet lock socket, 36 pins
Outlet connection		radial	radial	radial	radial
Special properties			Two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	


Combination COS R32-K and COS R32-A

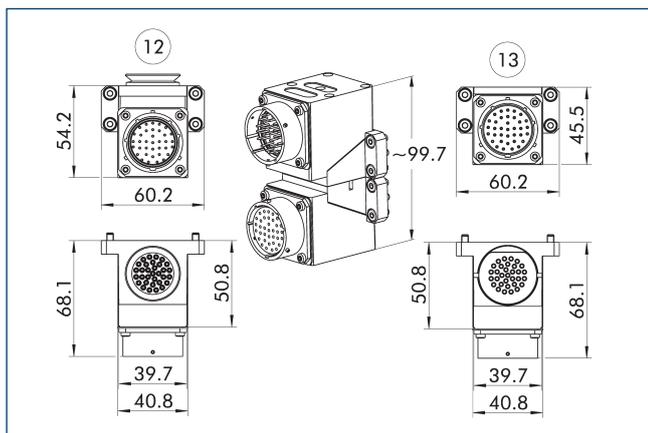

12 Master side

13 Adapter side

Combination possibilities R32

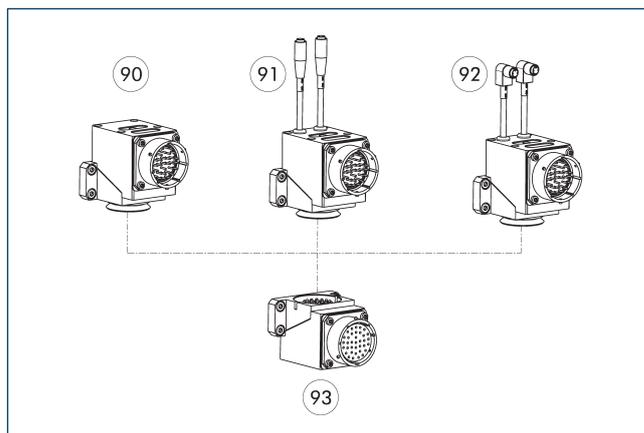


90 COS R32-K

91 COS R32W-K

92 COS R32R-K

93 COS R32-A

Pin assignment for COS R32R-K and COS R32-A

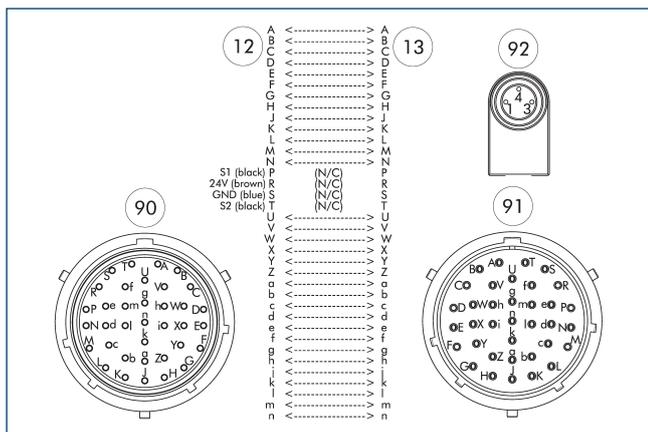

12 Master side

13 Adapter side


90 Amphenol PT bayonet lock connector, 36 pins

91 Amphenol PT bayonet lock socket, 36 pins

92 M8 socket, A-coded, 3-pin

93 leading pin

Pin assignment for COS R32W-K and COS R32-A

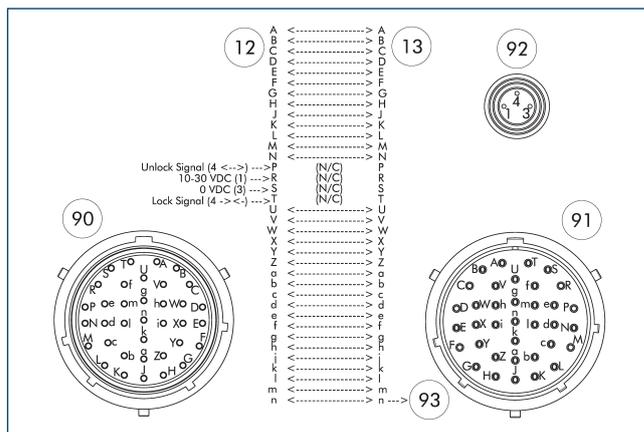

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 36 pins

91 Amphenol PT bayonet lock socket, 36 pins


92 M8 socket, A-coded, 3-pin

93 leading pin

# COS R32


## Feed-through modules

### Pin assignment for COS R32-K and COS R32-A

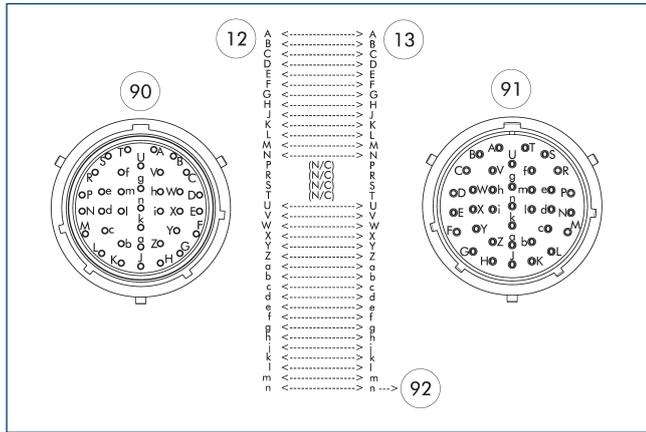

- 12 Master side
- 13 Adapter side
- 90 Amphenol PT bayonet lock connector, 36 pins
- 91 Amphenol PT bayonet lock socket, 36 pins
- 92 leading pin


### Cover COS JPC-A

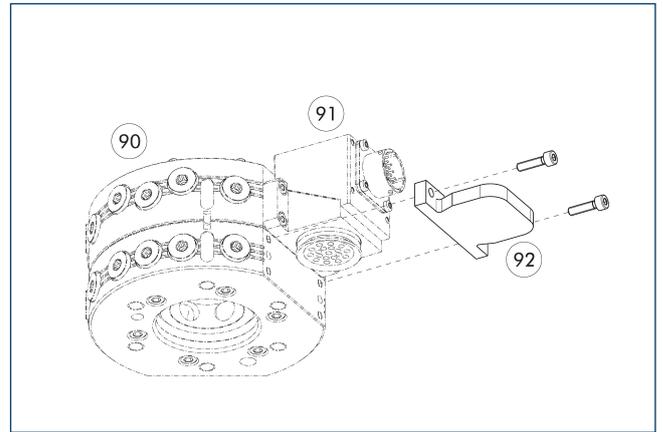

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

### Cable connector

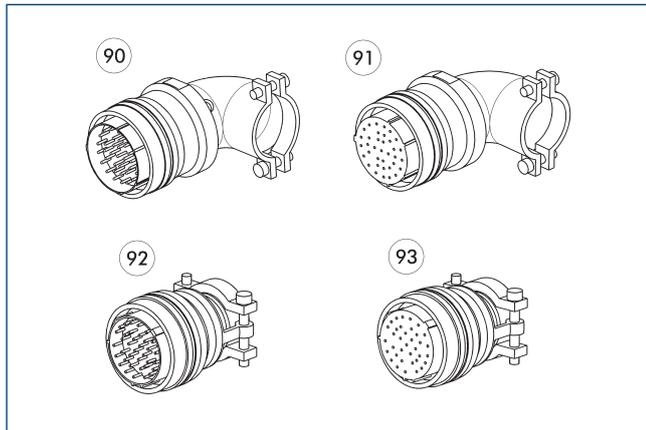

- 90 Angled plug
- 91 Angled socket
- 92 Straight plug
- 93 Straight socket

Description	ID
Angled cable connector, robot-side	
KAS-36B-K-90	0301274
Angled cable connector, tool-side	
KAS-36B-A-90	0301275
Straight cable connector, robot-side	
KAS-36B-K-0	0301272
Straight cable connector, tool-side	
KAS-36B-A-0	0301273

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS RF19


## Feed-through modules



### Technical data

Description		COS RF19-K	COS RF19R-K	COS RF19W-K	COS RF19-A	COS RF14-A	COS RF13-A
ID		1586678	1586679	1586691	1586677	1586676	1586674
Suitable on		Change head	Change head	Change head	Tool	Tool	Tool
Screw connection diagram		J	J	J	J	J	J
Transmission type		Signal	Signal	Signal	Signal	Signal	Signal
Weight	[kg]	0.11	0.12	0.12	0.1	0.11	0.12
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	15	15	19	14	13
Nominal current	[A]	3	3	3	3	3	3
Alternating voltage	[V AC]	30	30	30	30	30	30
Direct voltage	[V DC]	30	30	30	30	30	30
Electrical connection		M16 connector, 19-pin	M16 connector, 19-pin	M16 connector, 19-pin	M16 socket, 19-pin	M16 socket, 19-pin	M16 socket, 19-pin
Outlet connection		radial	radial	radial	radial	radial	radial
Special properties			Two integrated cables with right-angled M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.	Two integrated cables with straight M8 socket (A-coded, 3-pin), for connection of the locking and unlocking sensor.		Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.	Rotary encoder switch for tool coding for 0–31 tools. Designed for max. 0.15 A and 24 V.


Combination COS RF19-K and COS RF19-A

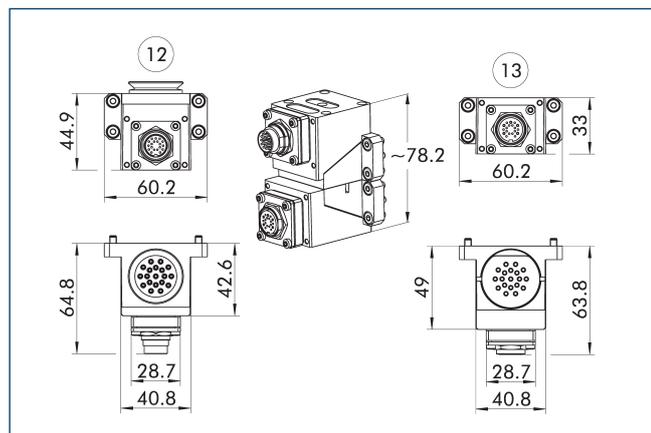

12 Master side

13 Adapter side

Combination possibilities RF19

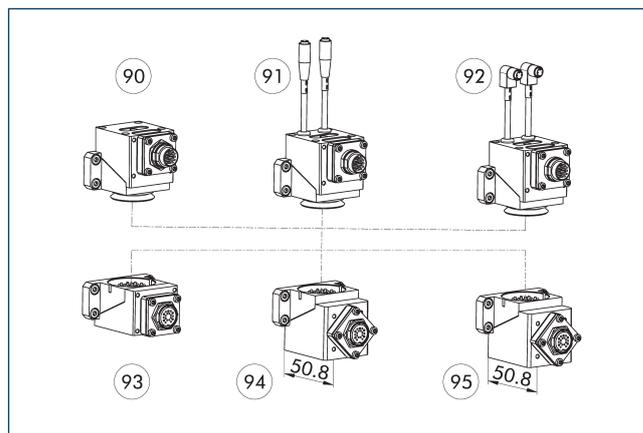

90 COS RF19-K

91 COS RF19W-K


92 COS RF19R-K

93 COS RF19-A

94 COS RF14-A

95 COS RF13-A

Pin assignment for COS RF19-K with COS RF14-A

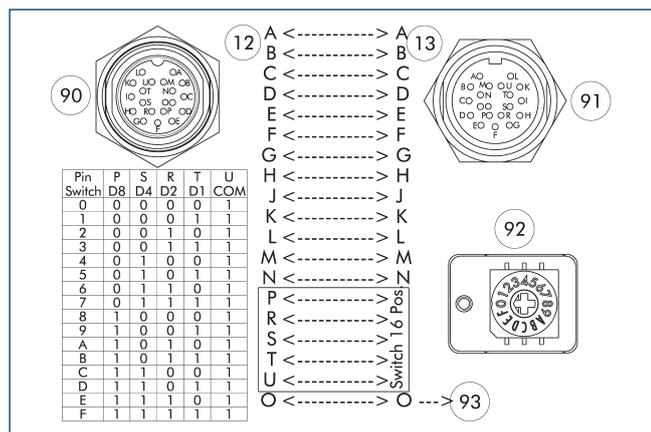

12 Master side

13 Adapter side


90 M16 connector, 19-pin

91 M16 socket, 19-pin

92 Rotary encoder switch for tool coding of 0-15 tools.

93 leading pin

Pin assignment for COS RF19-K with COS RF13-A

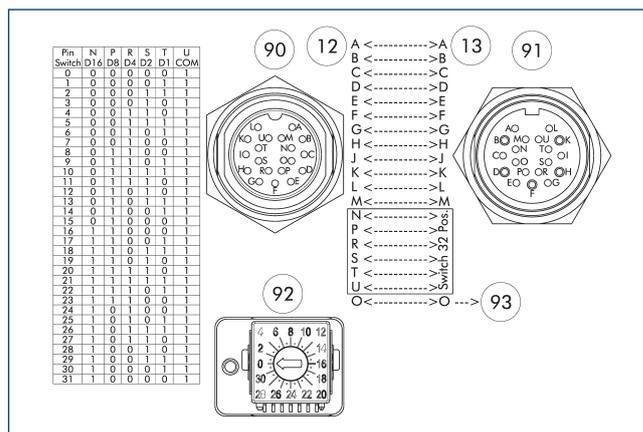

12 Master side

13 Adapter side

90 M16 connector, 19-pin

91 M16 socket, 19-pin


92 Rotary encoder switch for tool coding for 0 - 31 tools.

93 leading pin

# COS RF19


## Feed-through modules

### Pin assignment for COS RF19R-K with COS RF19-A

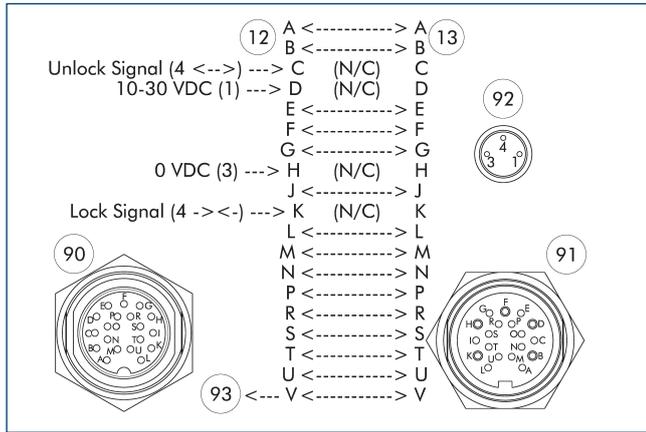


- 12 Master side
- 13 Adapter side
- 90 M16 connector, 19-pin
- 91 M16 socket, 19-pin
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

### Pin assignment for COS RF19W-K with COS RF19-A

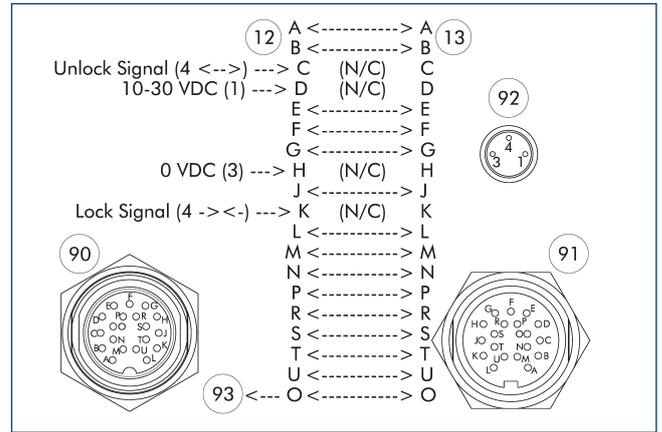


- 12 Master side
- 13 Adapter side
- 90 M16 connector, 19-pin
- 91 M16 socket, 19-pin
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin

### Pin assignment for COS RF19-K with COS RF19-A

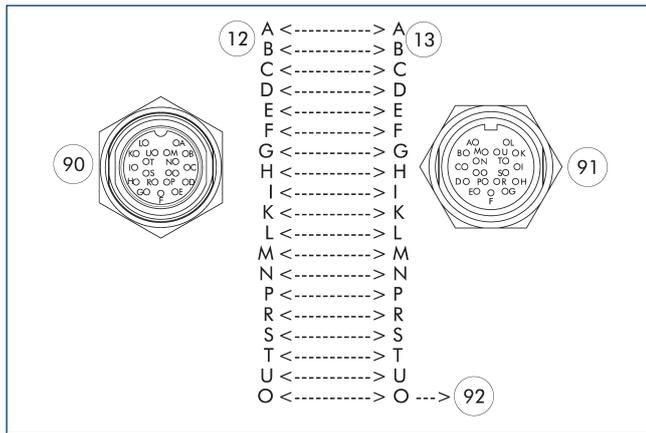

- 12 Master side
- 13 Adapter side
- 90 M16 connector, 19-pin
- 91 M16 socket, 19-pin
- 92 leading pin


### Cover COS JPC-A

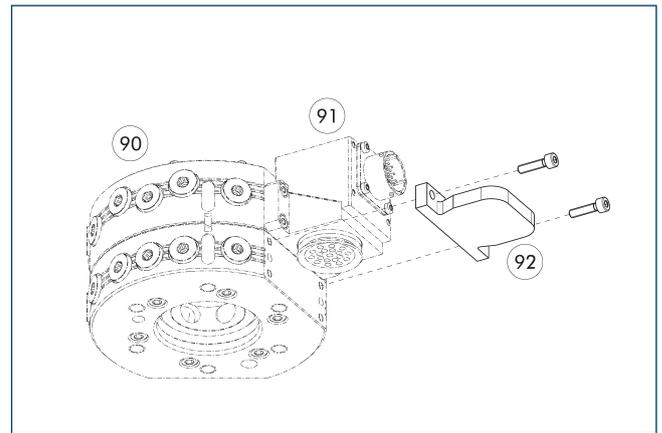

- 90 Automatic tool changers CPS
- 91 Optional module COS master
- 92 Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

**Cable plug/cable extension**

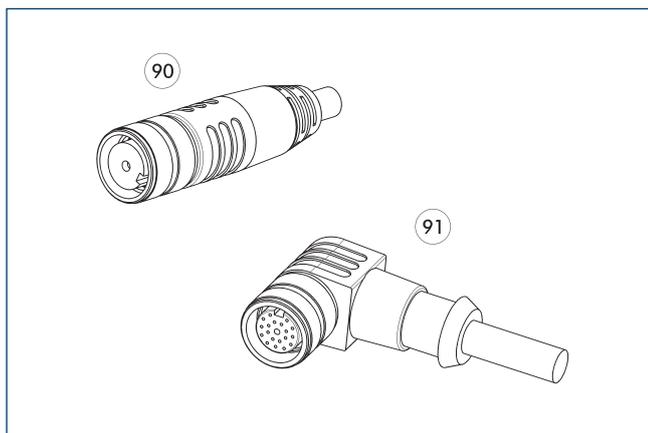

- 90 Connector/straight socket with extension cable
- 91 Connector/angled socket with extension cable

Description	ID	Length
		[m]
<b>Angled cable connector with cable, robot-side</b>		
KA BW19F-L 19P-0500	0302172	5
KA BW19F-L 19P-1000	0302173	10
<b>Angled cable connector with cable, tool-side</b>		
KA SW19F-L 19P-0300	0302175	3
<b>Straight cable connector with cable, robot-side</b>		
KA BG19F-L 19P-0500	0302170	5
KA BG19F-L 19P-1000	0302171	10
<b>Straight cable connector with cable, tool-side</b>		
KA SG19F-L 19P-0300	0302174	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS RK19


Feed-through modules



## Technical data

Description		COS RK19-K	COS RK19-A
ID		1586693	1586692
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	19
Nominal current	[A]	3	3
Alternating voltage	[V AC]	48	48
Direct voltage	[V DC]	63	63
Electrical connection		Intercontec M23 threaded cap connector	Intercontec M23 threaded cap socket
Outlet connection		radial	radial


Combination COS RK19-K and COS RK19-A

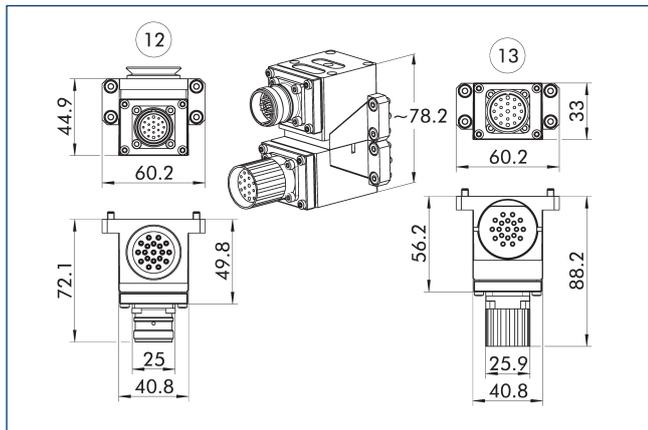

12 Master side

13 Adapter side

Pin assignment for COS RK19-K with COS RK19-A

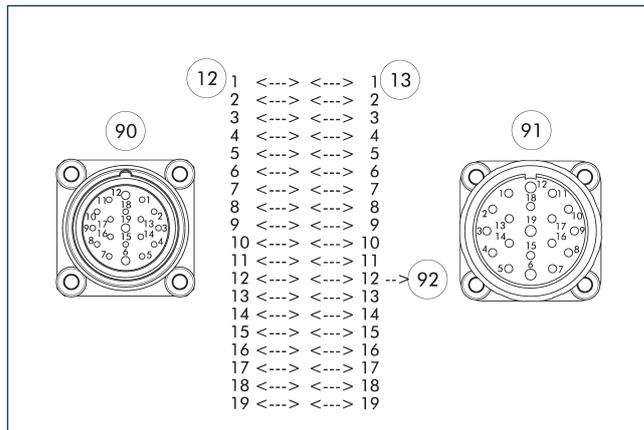

12 Master side


13 Adapter side

90 Intercontec M23 threaded cap connector

91 Intercontec M23 threaded cap socket

92 leading pin

Cover COS JPC-A

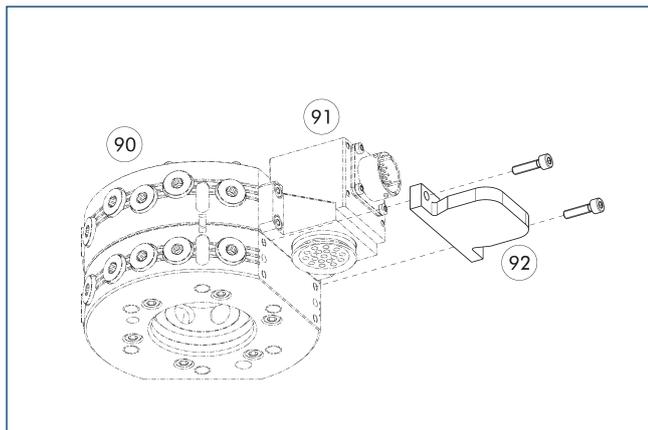


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Cable plug/cable extension

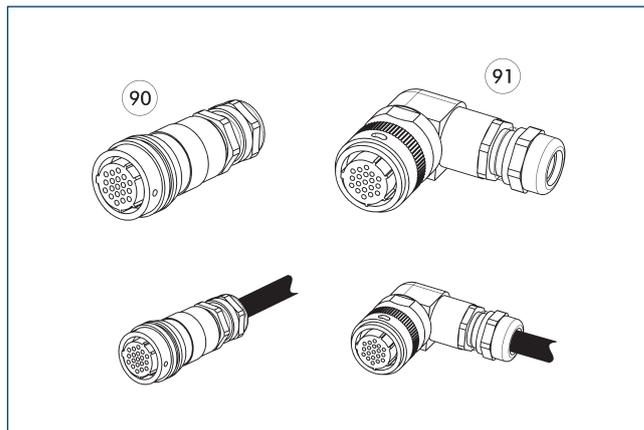

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Description	ID	
Straight cable connector		
KAS-RK19-A-0	1325872	
KAS-RK19-K-0	1325871	

# COS S19


## Feed-through modules



### Technical data

Description		COS S19-K	COS S19-A	COS S14-A
ID		1586697	1586696	1586695
Suitable on		Change head	Tool	Tool
Screw connection diagram		J	J	J
Transmission type		Signal	Signal	Signal
Weight	[kg]	0.17	0.15	0.2
Min./max. ambient temperature	[°C]	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	19	14
Nominal current	[A]	5	5	5
Alternating voltage	[V AC]	250	250	250
Direct voltage	[V DC]	250	250	250
Electrical connection		Amphenol PT bayonet lock connector, 19 pins	Amphenol PT bayonet lock socket, 19 pins	Amphenol PT bayonet lock socket, 19 pins
Outlet connection		axial	axial	axial
Special properties				Rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.


Combination COS S19-K and COS S19-A

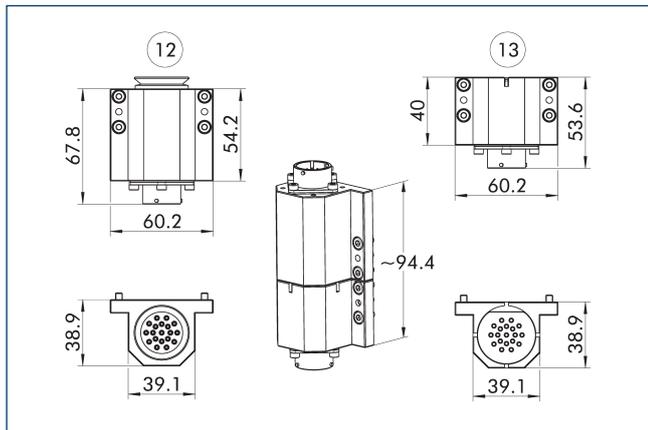

12 Master side

13 Adapter side

Combination possibilities S19

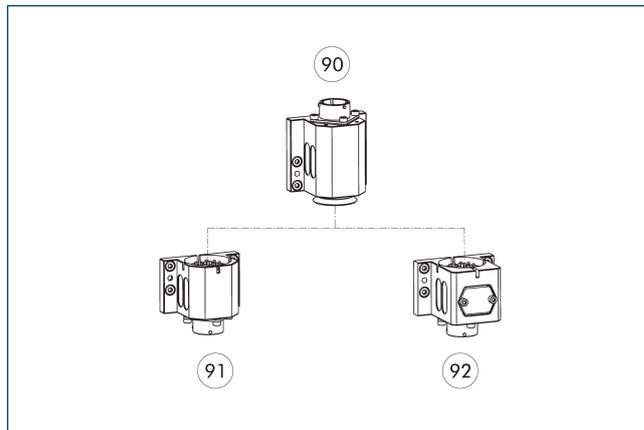

90 COS S19-K

91 COS S19-A

92 COS S14-A

Pin assignment for COS S19-K with COS S14-A

Pin	P	S	R	T	U
Switch	D8	D4	D2	D1	COM
0	0	0	0	0	1
1	0	0	0	1	1
2	0	0	1	0	1
3	0	0	1	1	1
4	0	1	0	0	1
5	0	1	0	1	1
6	0	1	1	0	1
7	0	1	1	1	1
8	1	0	0	0	1
9	1	0	0	1	1
A	1	0	1	0	1
B	1	0	1	1	1
C	1	1	0	0	1
D	1	1	0	1	1
E	1	1	1	0	1
F	1	1	1	1	1

12 A <-----> A 13  
 B <-----> B  
 C <-----> C  
 D <-----> D  
 E <-----> E  
 F <-----> F  
 G <-----> G  
 H <-----> H  
 J <-----> J  
 K <-----> K  
 L <-----> L  
 M <-----> M  
 N <-----> N  
 P <-----> P  
 R <-----> R  
 S <-----> S  
 T <-----> T  
 U <-----> U  
 V <-----> V

90  
 Mo Ao Bo  
 Lo No Po Co  
 Ko Uo Vo Ro Do  
 Jo To So Eo  
 Ho Go Fo

91  
 Mo Ao Bo  
 Lo No Po Co  
 Ko Uo Vo Ro Do  
 Jo To So Eo  
 Ho Go Fo

92  
 Switch 16 Pos.

93

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 19 pins

91 Amphenol PT bayonet lock socket, 19 pins

92 Rotary encoder switch for tool coding of 0-15 tools.

93 leading pin

Pin assignment for COS S19-K with COS S19-A

12 A <-----> A 13  
 B <-----> B  
 C <-----> C  
 D <-----> D  
 E <-----> E  
 F <-----> F  
 G <-----> G  
 H <-----> H  
 J <-----> J  
 K <-----> K  
 L <-----> L  
 M <-----> M  
 N <-----> N  
 P <-----> P  
 R <-----> R  
 S <-----> S  
 T <-----> T  
 U <-----> U  
 V <-----> V

90  
 Mo Ao Bo  
 Lo No Po Co  
 Ko Uo Vo Ro Do  
 Jo To So Eo  
 Ho Go Fo

91  
 Mo Ao Bo  
 Lo No Po Co  
 Ko Uo Vo Ro Do  
 Jo To So Eo  
 Ho Go Fo

92

12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 19 pins


91 Amphenol PT bayonet lock socket, 19 pins

92 leading pin

# COS S19

## Feed-through modules


### Cover COS JPC-A

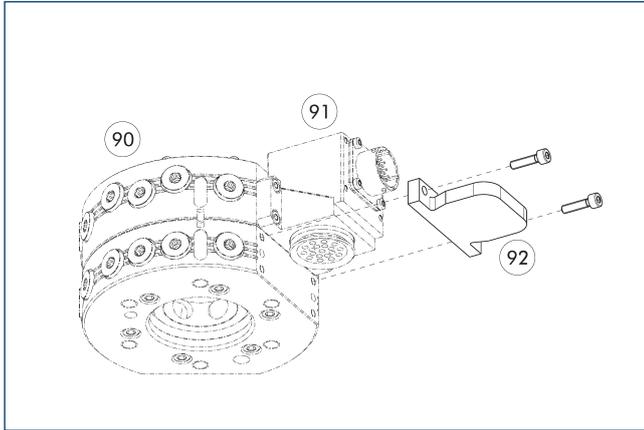

- ⑨⑩ Automatic tool changers CPS
- ⑨① Optional module COS master
- ⑨② Cover COS JPC-A

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

### Cable plug/cable extension

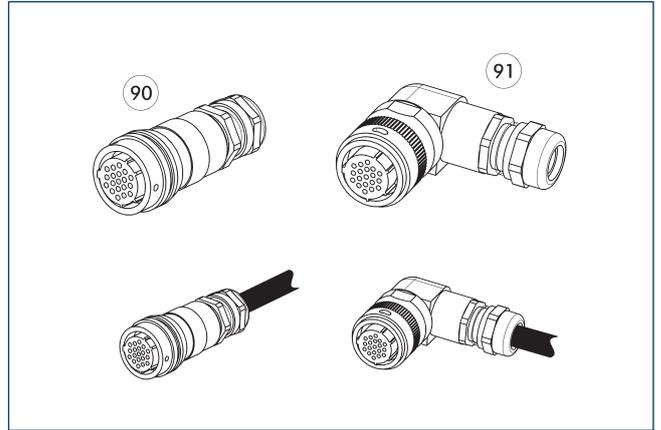

- ⑨⑩ Plug/socket straight
- ⑨① Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
Angled cable connector, robot-side		
KAS-19B-K-90-C	0301294	
Angled cable connector, tool-side		
KAS-19B-A-90-C	0301295	
Angled cable connector with cable, robot-side		
KA BW19B-L 19P-0300	0302179	3
KA BW19B-L 19P-0500	0302190	5
Angled cable connector with cable, tool-side		
KA SW19B-L 19P-0300	0302191	3
Straight cable connector, robot-side		
KAS-19B-K-0-C	0301283	
Straight cable connector, tool-side		
KAS-19B-A-0-C	0301284	
Straight cable connector with cable, robot-side		
KA BG19B-L 19P-0300	0302176	3
KA BG19B-L 19P-0500	0302177	5
Straight cable connector with cable, tool-side		
KA SG19B-L 19P-0300	0302178	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS S26


Feed-through modules



## Technical data

Description		COS S26-K	COS S26-A
ID		1586711	1586710
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.18	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		26	26
Nominal current	[A]	3	3
Alternating voltage	[V AC]	250	250
Direct voltage	[V DC]	250	250
Electrical connection		Amphenol PT bayonet lock connector, 26 pins	Amphenol PT bayonet lock socket, 26 pins
Outlet connection		axial	axial


Combination COS S26-K and COS S26-A

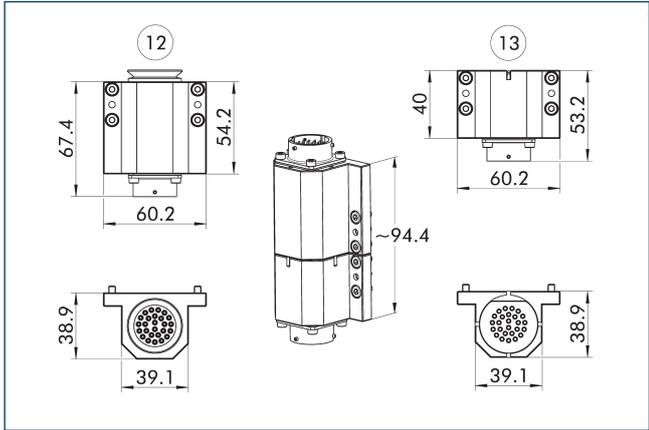

12 Master side

13 Adapter side

Pin assignment for COS S26-K with COS S26-A

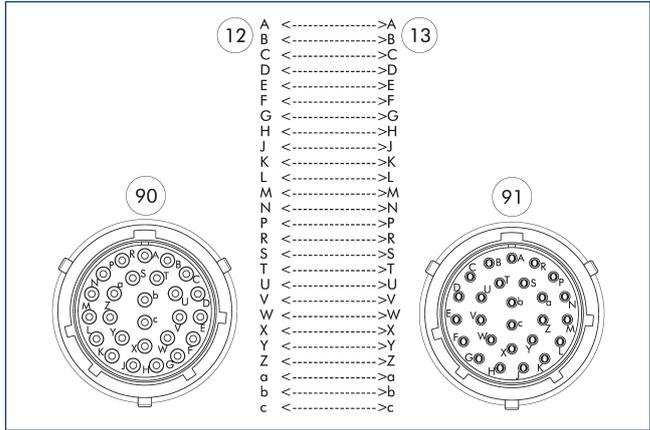


12 Master side

13 Adapter side

90 Amphenol PT bayonet lock connector, 26 pins

91 Amphenol PT bayonet lock socket, 26 pins

Cover COS JPC-A

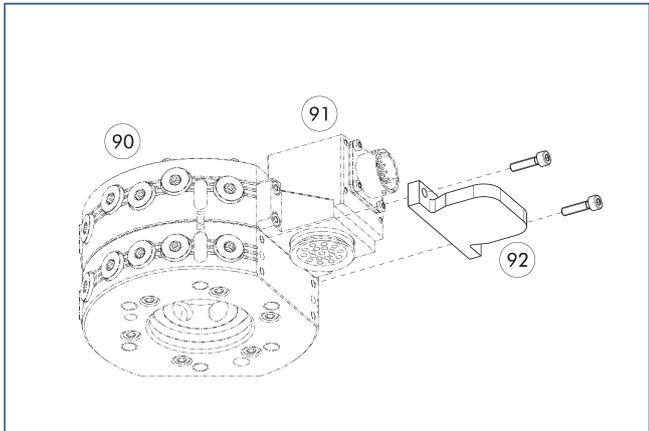


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

### Cable plug/cable extension

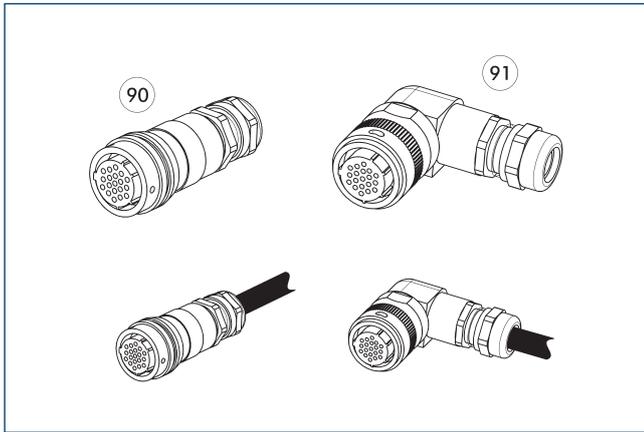

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	Length
		[m]
<b>Angled cable connector, robot-side</b>		
KAS-26B-K-90-C	0301296	
<b>Angled cable connector, tool-side</b>		
KAS-26B-A-90-C	0301297	
<b>Angled cable connector with cable, robot-side</b>		
KA BW26B-L 26P-0300	0302185	3
KA BW26B-L 26P-0500	0302186	5
<b>Angled cable connector with cable, tool-side</b>		
KA SW26B-L 26P-0300	0302187	3
<b>Straight cable connector, robot-side</b>		
KAS-26B-K-0-C	0301290	
<b>Straight cable connector, tool-side</b>		
KAS-26B-A-0-C	0301291	
<b>Straight cable connector with cable, robot-side</b>		
KA BG26B-L 26P-0300	0302192	3
KA BG26B-L 26P-0500	0302193	5
<b>Straight cable connector with cable, tool-side</b>		
KA SG26B-L 26P-0300	0302184	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS SA2


## Feed-through modules



### Technical data

Description		COS SA2-K	COS SA2-A	COS SA3-A
ID		1586714	1586712	1586715
Suitable on		Change head	Tool	Tool
Screw connection diagram		L	L	L
Transmission type		Signal	Signal	Signal
Weight	[kg]	0.77	0.58	0.59
Min./max. ambient temperature	[°C]	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		17	17	13
Nominal current	[A]	5	5	5
Alternating voltage	[V AC]	250	250	250
Direct voltage	[V DC]	250	250	250
Electrical connection		Amphenol MS threaded cap connector, 26 pins	Amphenol MS threaded cap socket, 19 pins	Amphenol MS threaded cap socket, 19 pins
Outlet connection		radial	radial	radial
Special properties		17 pins for free use, pin A and B predefined (0 VDC and 24 VDC). Proximity switch cable for piston stroke monitoring and presence monitoring can be plugged in.	17 pins for free use.	13 pins for free use, rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V.


Combination COS SA2-K and COS SA2-A

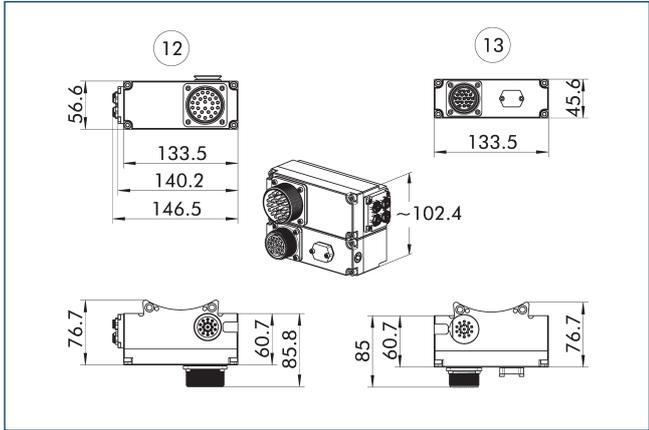

12 Master side

13 Adapter side

Combination possibilities SA2

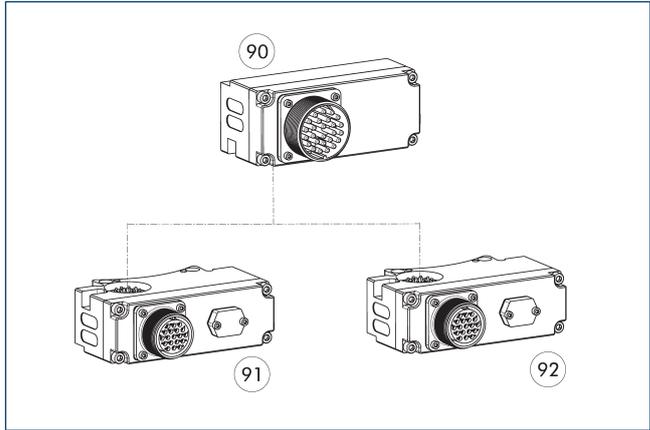


90 COS SA2-K

91 COS SA3-A

92 COS SA2-A

Pneumatic control module

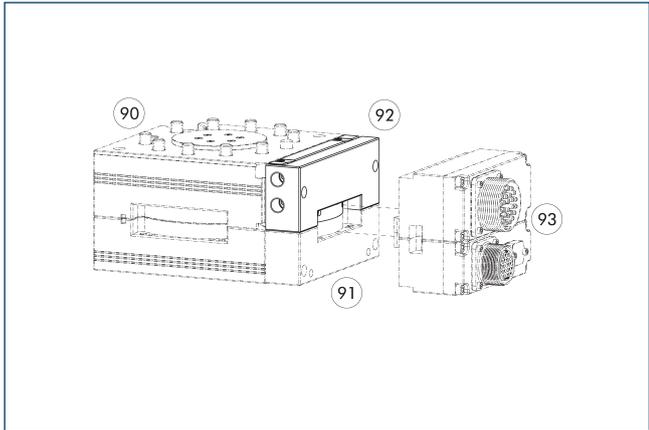


90 Automatic tool changer CPS

92 Pneumatic control module COS master

91 Distance plate

93 Optional module COS master and adapter

Pin assignment for COS SA2-K with COS SA2-A

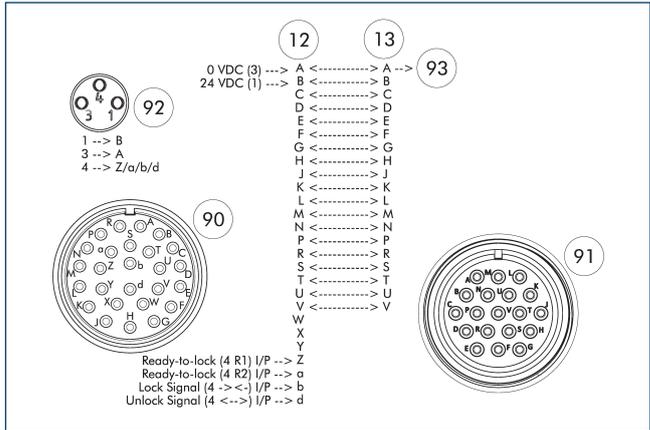

12 Master side

13 Adapter side

90 Amphenol MS threaded cap connector, 26 pins

91 Amphenol MS threaded cap socket, 19 pins

92 M8 socket, A-coded, 3-pin


93 leading pin

Description	ID	Screw connection diagram
Fluid feed-through module		
COS JB2-K	1586302	L1
COS JB3-K	1586303	L2

# COS SA2


## Feed-through modules

### Pin assignment for COS SA2-K with COS SA3-A

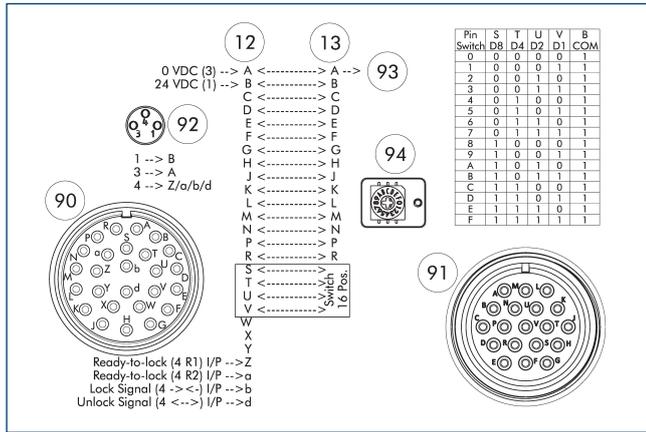

- 12 Master side
- 13 Adapter side
- 90 Amphenol MS threaded cap connector, 26 pins
- 91 Amphenol MS threaded cap socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin
- 94 Rotary encoder switch for tool coding of 0-15 tools.
- 95 M12 socket, A-coded, 4-pin


### Cover COS UAA-A

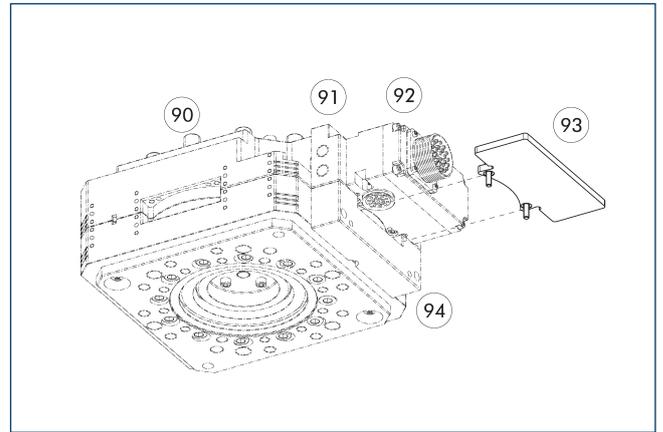

- 90 Automatic tool changer CPS
- 91 Pneumatic control module COS master
- 92 Optional module COS master
- 93 Cover COS UAA-A
- 94 Distance plate

Description	ID	Suitable for
Cover		
COS UAA-A	1584130	COS SA2-K and COS VB7-K

### Cable plug/cable extension

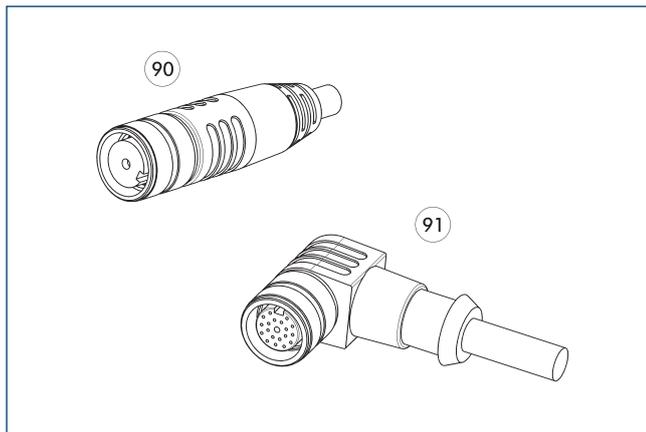

- 90 Connector/straight socket with extension cable
- 91 Connector/angled socket with extension cable

Description	ID
Angled cable connector, robot-side	
KAS-26G-K-90	0301235
Angled cable connector, tool-side	
KAS-19G-A-90	0301237
Straight cable connector, robot-side	
KAS-26G-K-0	0301234
Straight cable connector, tool-side	
KAS-19G-A-0	0301233

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS SF19


Feed-through modules



## Technical data

Description		COS SF19-K	COS SF19-A
ID		1586718	1586717
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.17	0.13
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	19
Nominal current	[A]	3	3
Alternating voltage	[V AC]	30	30
Direct voltage	[V DC]	30	30
Electrical connection		M16 connector, 19-pin	M16 socket, 19-pin
Outlet connection		axial	axial


Combination COS SF19-K and COS SF19-A

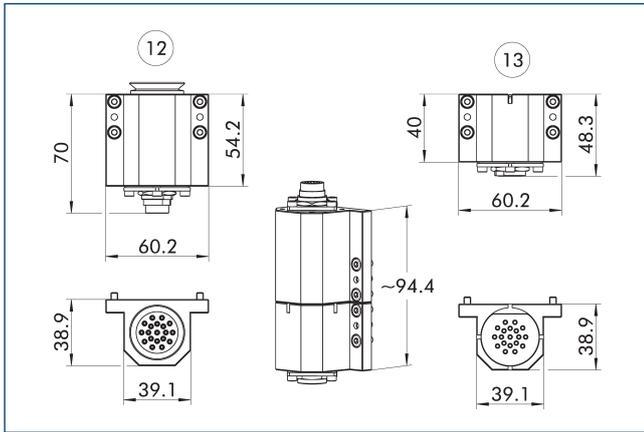

12 Master side

13 Adapter side

Pin assignment for COS SF19-K with COS SF19-A

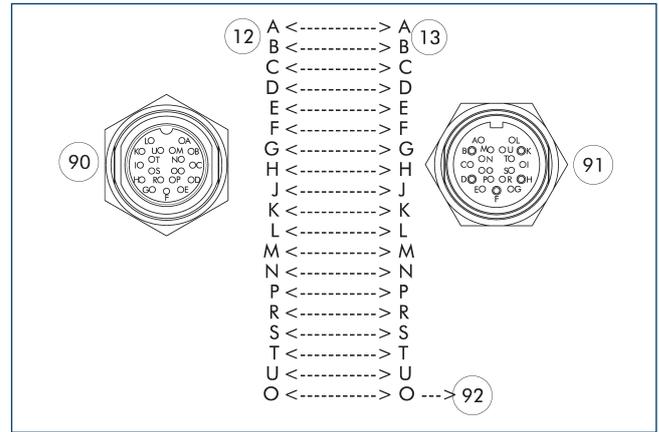

12 Master side


13 Adapter side

90 M16 connector, 19-pin

91 M16 socket, 19-pin

92 leading pin

Cover COS JPC-A

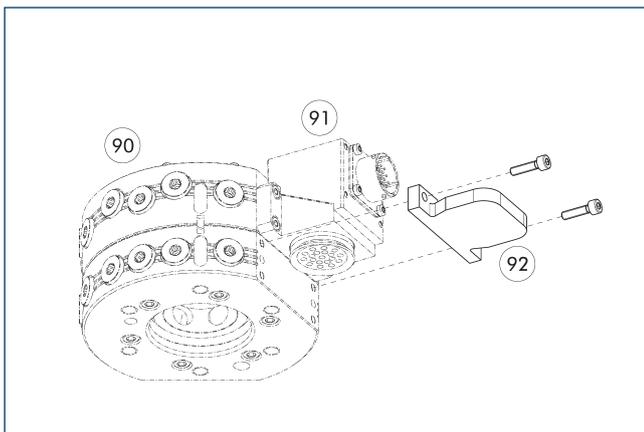


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

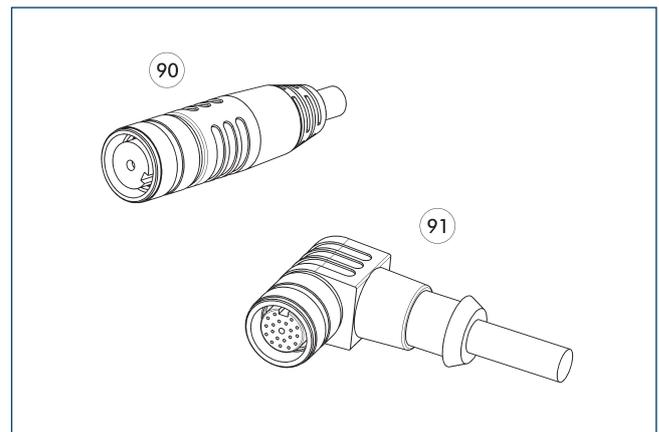

90 Connector/straight socket with extension cable

91 Connector/angled socket with extension cable

Description	ID	Length [m]
Angled cable connector with cable, robot-side		
KA BW19F-L 19P-0500	0302172	5
KA BW19F-L 19P-1000	0302173	10
Angled cable connector with cable, tool-side		
KA SW19F-L 19P-0300	0302175	3
Straight cable connector with cable, robot-side		
KA BG19F-L 19P-0500	0302170	5
KA BG19F-L 19P-1000	0302171	10
Straight cable connector with cable, tool-side		
KA SG19F-L 19P-0300	0302174	3

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS VB7


Feed-through modules



## Technical data

Description		COS VB7-K	COS VB2-A	COS VB3-A
ID		1586753	1586751	1586752
Suitable on		Change head	Tool	Tool
Screw connection diagram		L	L	L
Transmission type		Signal	Signal	Signal
Weight	[kg]	0.77	0.59	0.6
Min./max. ambient temperature	[°C]	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		14	14	10
Nominal current	[A]	5	5	5
Alternating voltage	[V AC]	250	250	250
Direct voltage	[V DC]	250	250	250
Electrical connection		Amphenol MS threaded cap connector, 26 pins	Amphenol MS threaded cap socket, 19 pins	Amphenol MS threaded cap socket, 19 pins
Outlet connection		radial	radial	radial
Special properties		Control module for use with COS JU2-K and COS JU3-K, 14 pins for free use.	14 pins for free use, storage position sensor can be plugged in (RTU tool side).	10 pins for free use, rotary encoder switch for tool coding of 0 – 15 tools. Designed for max. 0.15 A and 24 V, storage position sensor attachable (RTU tool side).


Combination COS VB7-K and COS VB2-A

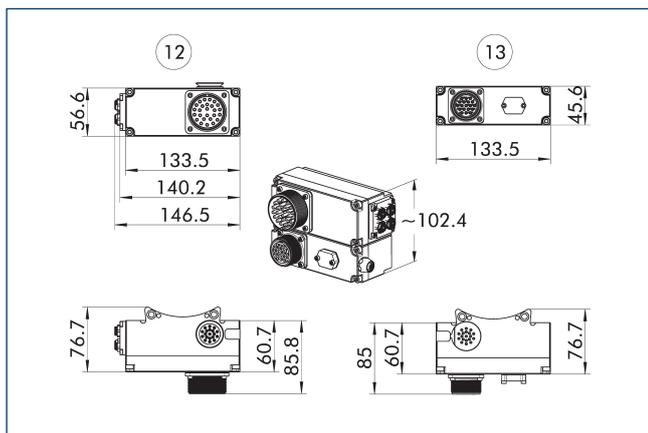

12 Master side

13 Adapter side

Combination possibilities VB7

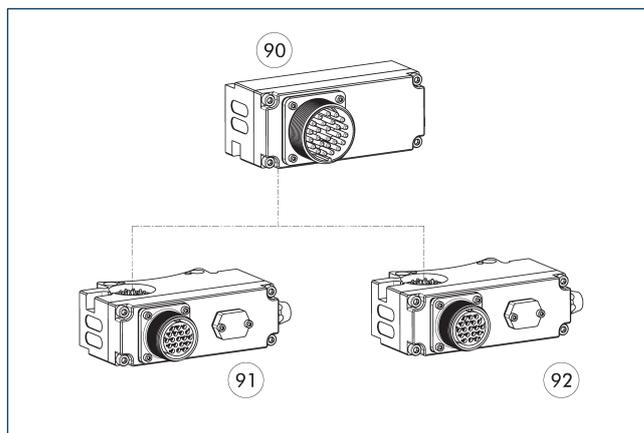


90 COS VB7-K

91 COS VB3-A

92 COS VB2-A

Pneumatic control module

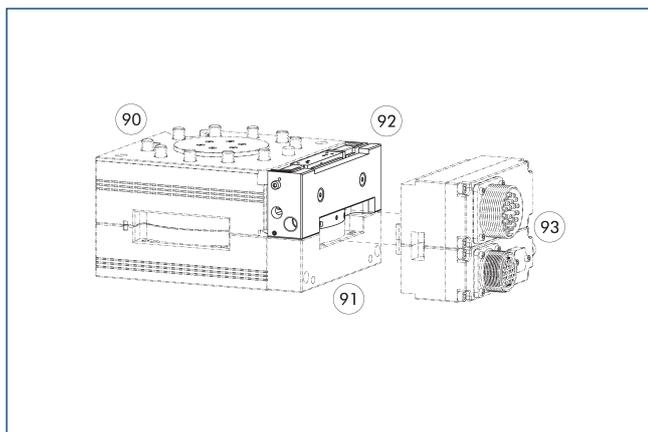

90 Automatic tool changer CPS


91 Distance plate

92 Pneumatic control module COS master

93 Control module COS master and adapter

Description	ID	Screw connection diagram
Fluid feed-through module		
COS JU2-K	1586306	L1
COS JU3-K	1586308	L2

MMS 54-S-M12 for COS VB7 with SM-MMS 54

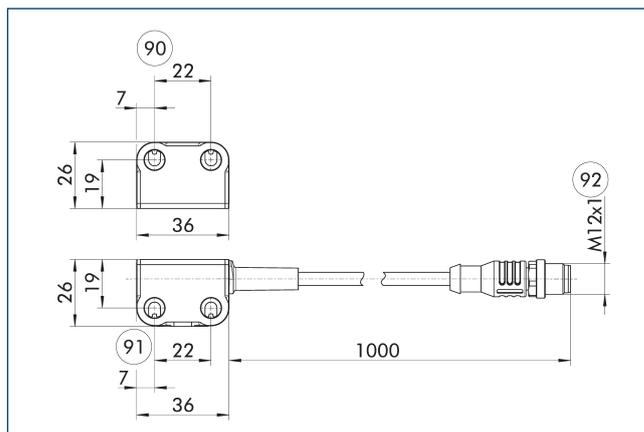

90 Assembly at the storing station

91 Mounting on the CPS adapter

92 M12, 5-pin, A-coded


Description	ID	
Magnetic switches		
MMS 54-S-M12	1653302	
SM-MMS 54	1653303	

① The SM-MMS 54 switching solenoid can only be used in combination with the MMS 54-S-M12 sensor.

# COS VB7


## Feed-through modules

### Pin assignment for COS VB7-K with COS VB2-A

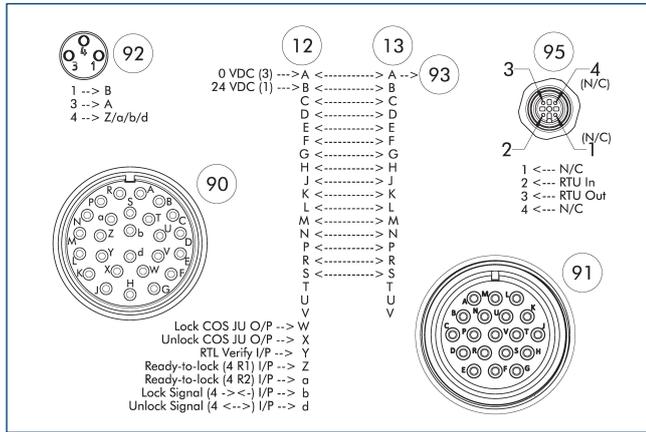


- 12 Master side
- 13 Adapter side
- 90 Amphenol MS threaded cap connector, 26 pins
- 91 Amphenol MS threaded cap socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin
- 95 M12 socket, A-coded, 4-pin

### Pin assignment for COS VB7-K with COS VB3-A

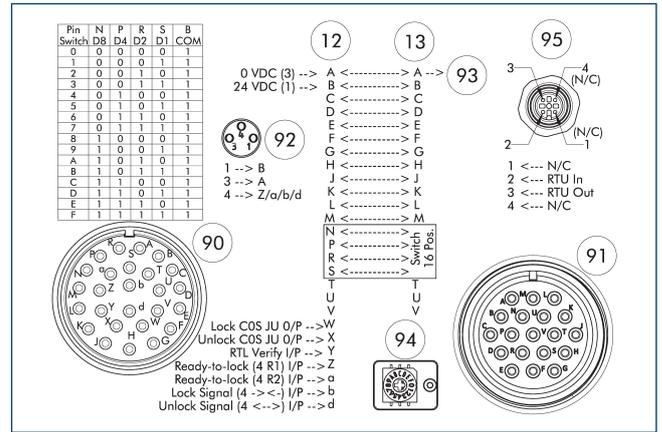

- 12 Master side
- 13 Adapter side
- 90 Amphenol MS threaded cap connector, 26 pins
- 91 Amphenol MS threaded cap socket, 19 pins
- 92 M8 socket, A-coded, 3-pin
- 93 leading pin
- 94 Rotary encoder switch for tool coding of 0 - 15 tools.
- 95 M12 socket, A-coded, 4-pin


### Cover COS UAA-A

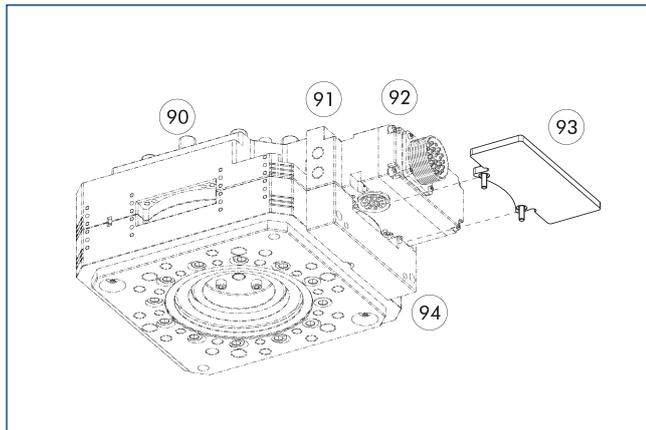

- 90 Automatic tool changer CPS
- 91 Pneumatic control module COS master
- 92 Optional module COS master
- 93 Cover COS UAA-A
- 94 Distance plate

Description	ID	Suitable for
Cover		
COS UAA-A	1584130	COS SA2-K and COS VB7-K

### Cable plug/cable extension

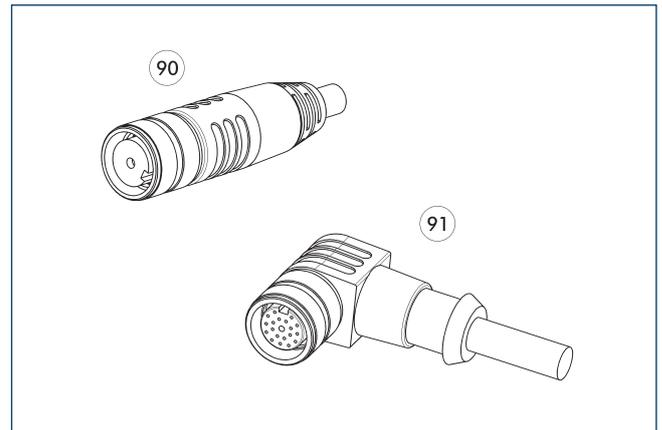

- 90 Connector/straight socket with extension cable
- 91 Connector/angled socket with extension cable

Description	ID
Angled cable connector, robot-side	
KAS-26G-K-90	0301235
Angled cable connector, tool-side	
KAS-19G-A-90	0301237
Straight cable connector, robot-side	
KAS-26G-K-0	0301234
Straight cable connector, tool-side	
KAS-19G-A-0	0301233

① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)



# COS X7G


Feed-through modules



## Technical data

Description		COS X7G-K	COS X7G-A
ID		1586757	1586756
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		ultrasonic	ultrasonic
Weight	[kg]	0.13	0.11
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP40 (only in coupled status)	IP40 (only in coupled status)
Number of pin contacts		1	1
Nominal current	[A]	1	1
Alternating voltage	[V AC]	1000	1000
Direct voltage	[V DC]	1000	1000
Frequency	[kHz]	30	30
Electrical connection		Bulkhead SHV	Bulkhead SHV
Outlet connection		radial	radial
Special properties		For ultrasound welding and cutting applications, shielding insulated from module housing.	For ultrasound welding and cutting applications, shielding insulated from module housing.


**Combination COS X7G-K and COS X7G-A**

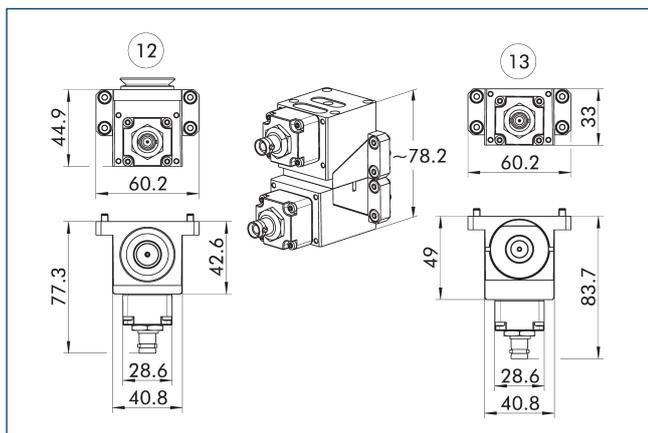

12 Master side

13 Adapter side

**Pin assignment for COS X7G-K with COS X7G-A**

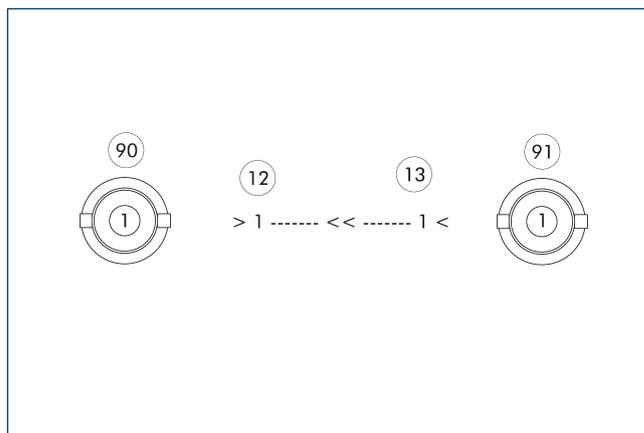

12 Master side

13 Adapter side

90 Bulkhead SHV

91 Bulkhead SHV

# COS MT14


Feed-through modules



## Technical data

Description		COS MT14-K	COS MT14-A
ID		1586648	1586646
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Power	Power
Weight	[kg]	0.31	0.33
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		14	14
Nominal current	[A]	13	13
Alternating voltage	[V AC]	450	450
Direct voltage	[V DC]	700	700
Electrical connection		Amphenol MS threaded cap connector, 19 pins	Amphenol MS threaded cap socket, 19 pins
Electrical connection outlet		tangential	tangential
Special properties		Right cable outlet	Right cable outlet


Combination COS MT14-K and COS MT14-A

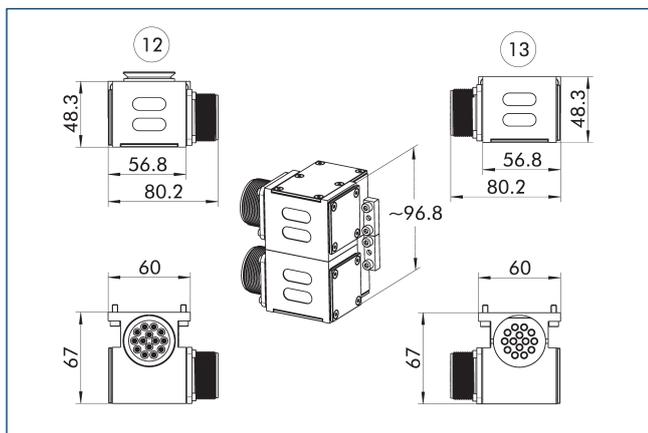

12 Master side

13 Adapter side

Pin assignment for COS MT14-K with COS MT14-A

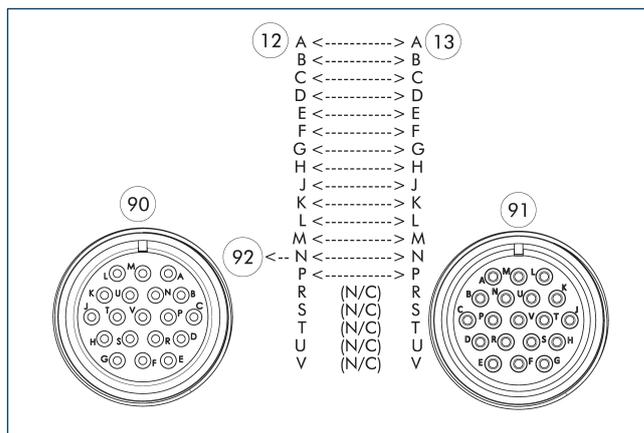

12 Master side


13 Adapter side

90 Amphenol MS threaded cap connector, 19 pins

91 Amphenol MS threaded cap socket, 19 pins

92 leading pin

Cover COS JPC-A

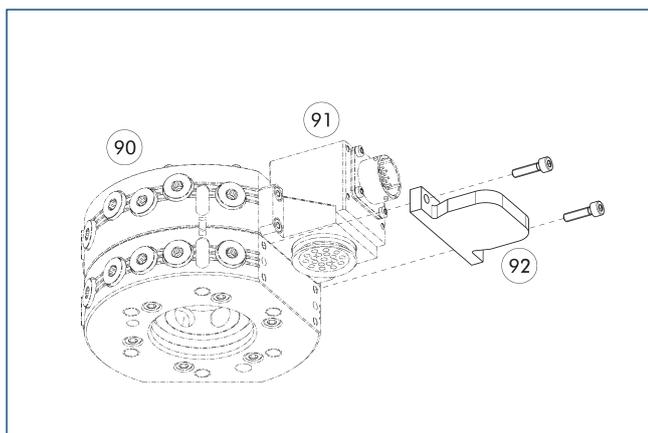


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable connector

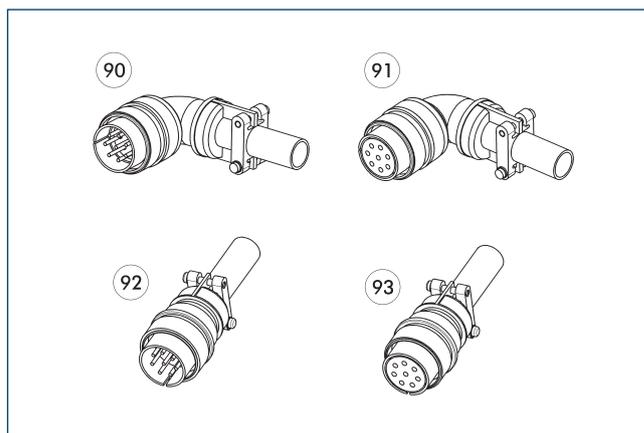

90 Angled plug

91 Angled socket

92 Straight plug

93 Straight socket

Description	ID	
Angled cable connector, robot-side		
KAS-19G-K-90	0301236	
Angled cable connector, tool-side		
KAS-19G-A-90	0301237	
Straight cable connector, robot-side		
KAS-19G-K-0	0301232	
Straight cable connector, tool-side		
KAS-19G-A-0	0301233	


① Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS MT8


Feed-through modules



## Derating in continuous operation

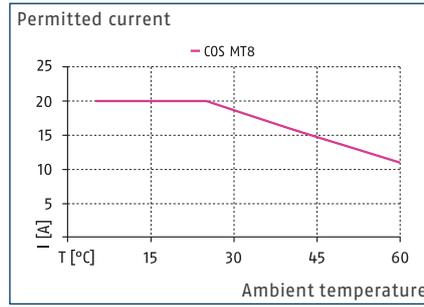

## Derating in cyclical operation

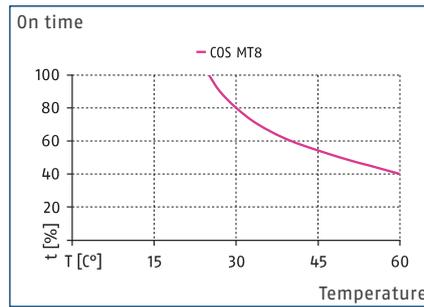


## Technical data

Description		COS MT8-K	COS MT8L-K	COS MT8-A	COS MT8L-A
ID		1586685	1586689	1586684	1586687
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J
Transmission type		Power	Power	Power	Power
Weight	[kg]	0.31	0.31	0.33	0.33
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		8	8	8	8
Nominal current	[A]	20	20	20	20
Alternating voltage	[V AC]	450	450	450	450
Direct voltage	[V DC]	700	700	700	700
Electrical connection		Amphenol MS threaded cap connector, 8 pins	Amphenol MS threaded cap connector, 8 pins	Amphenol MS threaded cap socket, 8 pins	Amphenol MS threaded cap socket, 8 pins
Electrical connection outlet		tangential	tangential	tangential	tangential
Special properties		Right cable outlet	Left cable outlet	Right cable outlet	Left cable outlet

Derating in continuous operation: the permitted current depends on the ambient temperature. Exceeding this temperature can lead to overheating and possible product damage.

Derating in cyclical operation: the time-dependent transfer of the maximum rated current (20 A, 10-minute basis) depends on the duty cycle (t). Exceeding the temperature limits can lead to overheating and thus to product damage.

Combination COS MT8-K and COS MT8-A

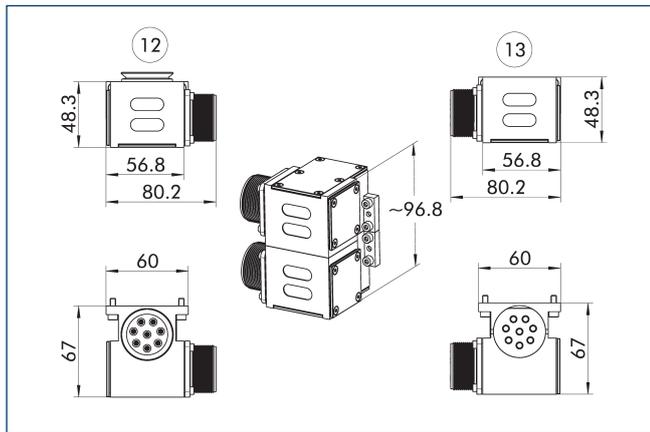


12 Master side

13 Adapter side

1 The illustration shows the combination of feed-through modules with tangential cable outlet on the right. This variant is also available with a tangential cable outlet on the left.

Pin assignment for COS MT8-K and COS MT8-A or COS MT8L-K and MT8L-A

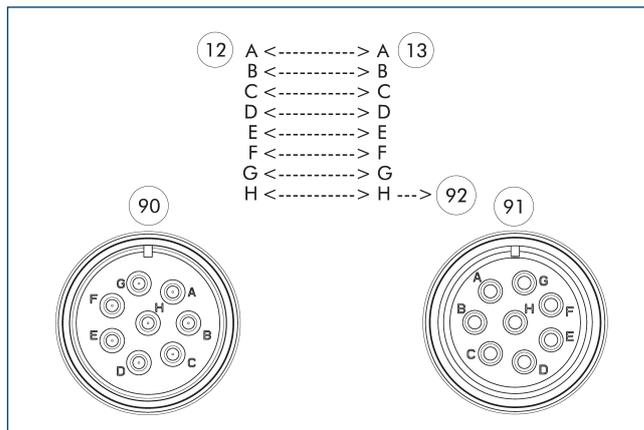

12 Master side


13 Adapter side

90 Amphenol MS threaded cap connector, 8 pins

91 Amphenol MS threaded cap socket, 8 pins

92 leading pin

Cover COS JPC-A

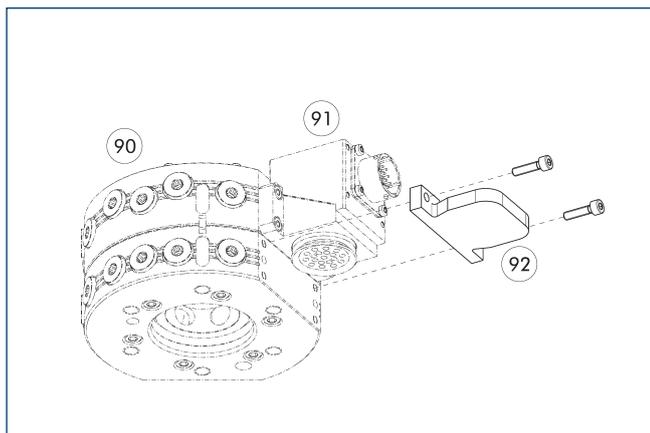


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable connector

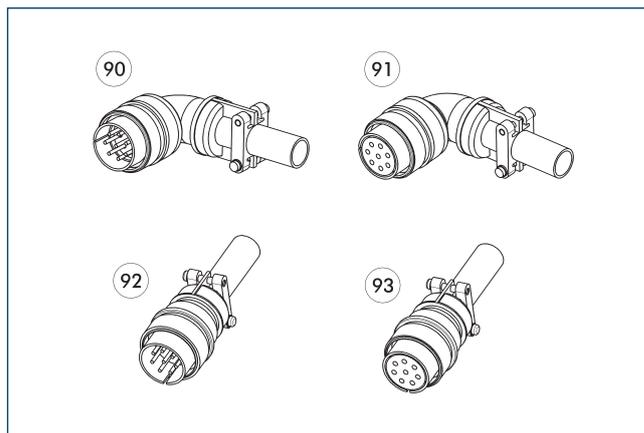

90 Angled plug

91 Angled socket

92 Straight plug

93 Straight socket

Description	ID	
Angled cable connector, robot-side		
KAS-08G-K-90	0301270	
Angled cable connector, tool-side		
KAS-08G-A-90	0301271	
Straight cable connector, robot-side		
KAS-08G-K-0	0301268	
Straight cable connector, tool-side		
KAS-08G-A-0	0301269	

1 Detailed information and further cable connectors can be found at [schunk.com](http://schunk.com)

# COS REP10


## Feed-through modules



### Technical data

Description		COS REP10-K	COS REP10-KIT-K	COS REP10-A	COS REP10-KIT-A
ID		1586665	1586668	1586664	1586667
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		J	J	J	J
Transmission type		Servo	Servo	Servo	Servo
Weight	[kg]	0.14	0.14	0.14	0.14
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		6	6	6	6
Nominal current	[A]	5	5	5	5
Alternating voltage	[V AC]	48	500	48	500
Direct voltage	[V DC]	74	700	74	700
Electrical connection		M23 connector, 9-pin		M23 socket, 9-pin	
Outlet connection		radial		radial	
Number of pin contacts		3	4	3	4
Nominal current	[A]	15	15	15	15
Alternating voltage	[V AC]	48	500	48	500
Direct voltage	[V DC]	74	700	74	700
Electrical connection			M16 cable gland for Ø 5 – 10 mm		M16 cable gland for Ø 5 – 10 mm
Special properties		Shielding of connector housing is via pinblock, electric circuits (signal & power) are galvanically separated.	The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.	Shielding of connector housing is via pinblock, electric circuits (signal & power) are galvanically separated.	The KIT has an additional attachment with various outlet options. Direct soldering of the cable strands to the pin block.


## Combination COS REP10-K and COS REP10-A

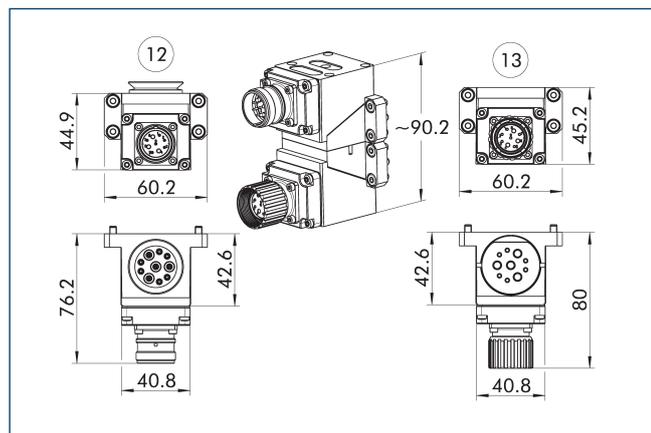

12 Master side

13 Adapter side


## Combination COS REP10-Kit-K and COS REP10-Kit-A

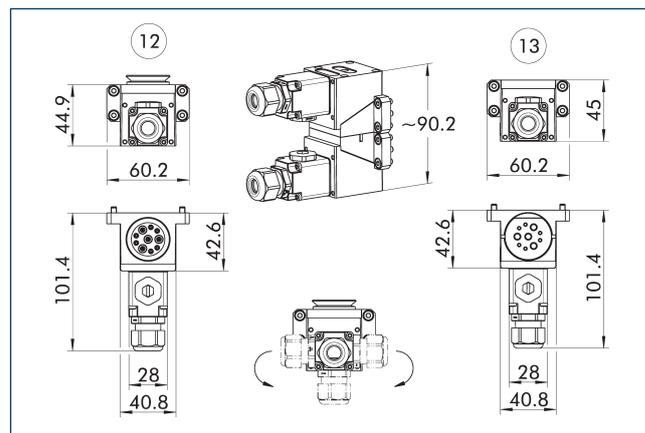

12 Master side

13 Adapter side

## Pin assignment for COS REP10-K with COS REP10-A

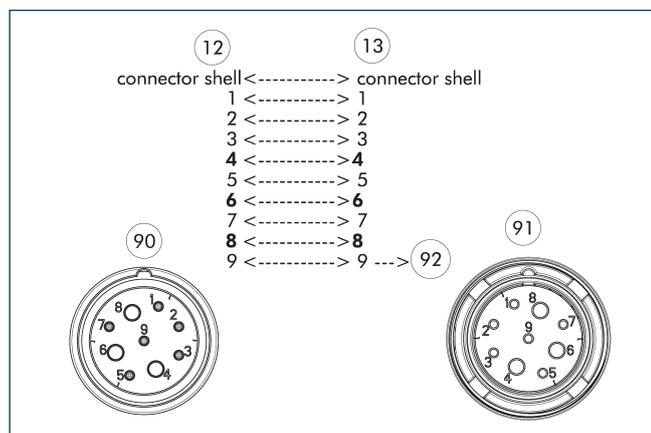

12 Master side


13 Adapter side

90 M23 connector, 9-pin

91 M23 socket, 9-pin

92 leading pin

## Cover COS JPC-A

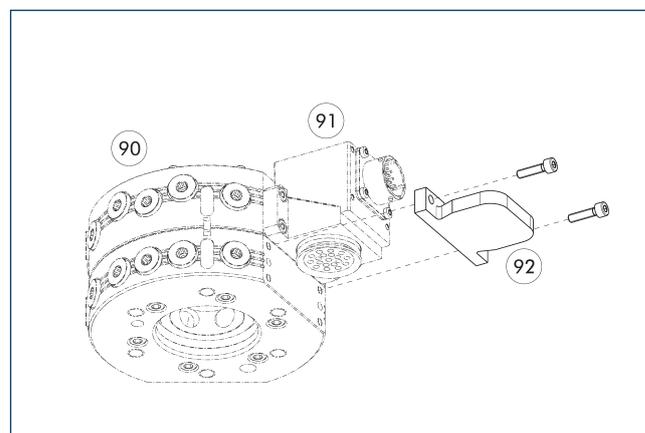

90 Automatic tool changers CPS

92 Cover COS JPC-A


91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

# COS REP10

Feed-through modules

## Cable plug/cable extension

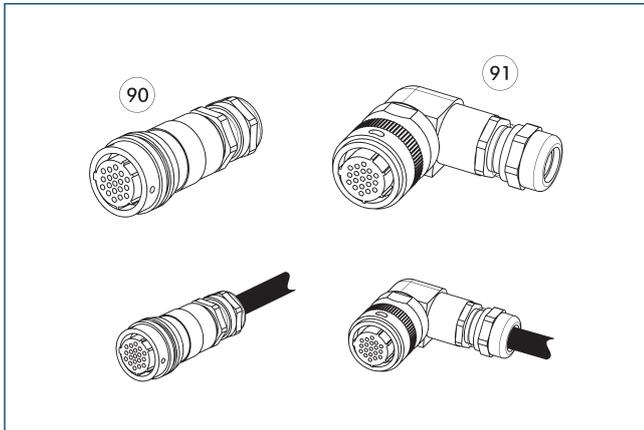

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID
Angled cable connector	
KAS-REP10-K-90	30081323
Straight cable connector	
KAS-REP10-A-0	1644046



# COS RES10B


Feed-through modules



## Technical data

Description		COS RES10B-K	COS RES10B-A
ID		1586671	1586669
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Servo	Servo
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		9	9
Nominal current	[A]	3.5	3.5
Alternating voltage	[V AC]	160	160
Direct voltage	[V DC]	160	160
Electrical connection		M23 connector, 12-pin	M23 socket, 12-pin
Outlet connection		radial	radial
Special properties		Four twisted wire pairs, shielding of connector housing is via pinblock.	Four twisted wire pairs, shielding of connector housing is via pinblock.


## Combination COS RES10B-K and COS RES10B-A

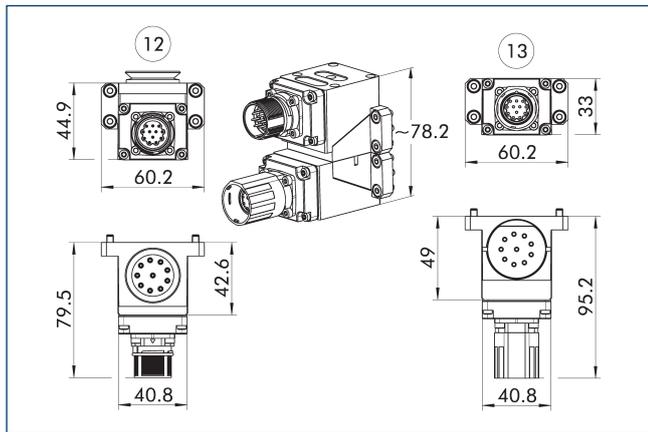

12 Master side

13 Adapter side

## Pin assignment for COS RES10B-K with COS RES10B-A

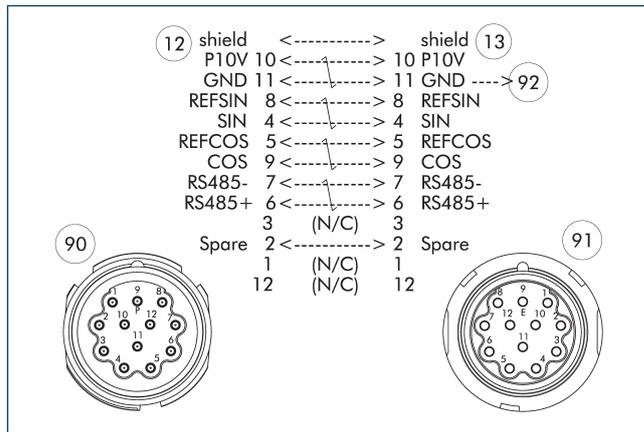

12 Master side


13 Adapter side

90 JAE interface

91 JAE interface

92 leading pin

## Cover COS JPC-A

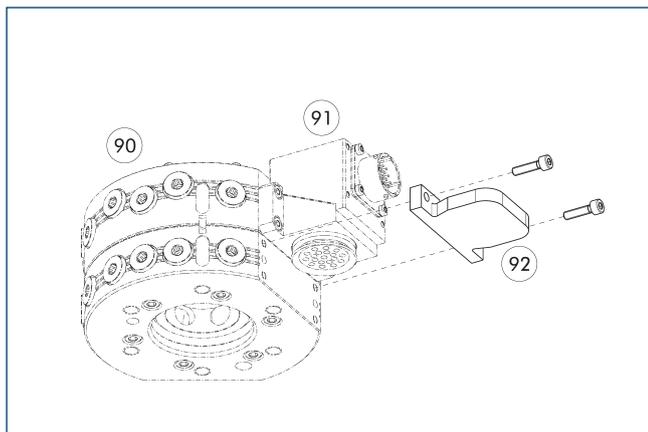


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

## Cable plug/cable extension

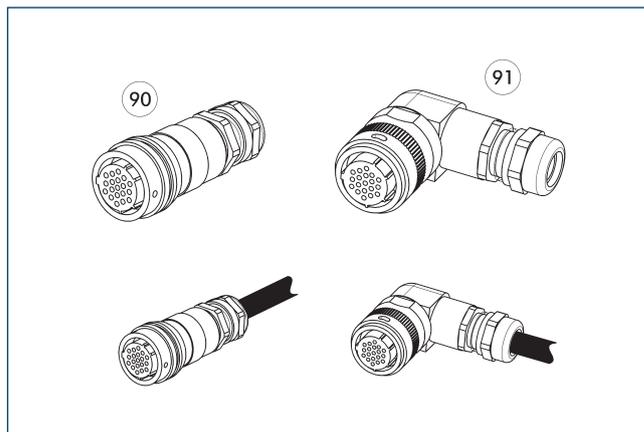

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Straight cable connector		
KAS-12G-A-0	1344402	
KAS-12G-K-0	1344401	

# COS EN110S1

Feed-through modules




## Technical data

Description		COS EN110S1-K	COS EN110S1-A
ID		1586500	1586488
Suitable on		Change head	Tool
Screw connection diagram		L over adapter plate	L over adapter plate
Transmission type		Signal	Signal
Weight	[kg]	0.66	0.67
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		19	19
Nominal current	[A]	5	5
Alternating voltage	[V AC]	250	250
Direct voltage	[V DC]	250	250
Electrical connection		Implementation by the customer	Implementation by the customer
Number of pin contacts		7	7
Nominal current	[A]	13	13
Alternating voltage	[V AC]	450	450
Direct voltage	[V DC]	700	700
Special properties		Direct soldering of the cable strands to the pin blocks	Direct soldering of the cable strands to the pin blocks

① The adapter plates COS Z56-K-L/3EN, ID 1585129 (robot side), or COS Z56-A-L/3EN, ID 1585144 (tool side), are required for the L-screw connection diagram. Up to three EN110S1 modules can be fastened to it.

## Combination of COS EN110S1-K and COS EN110S1-A

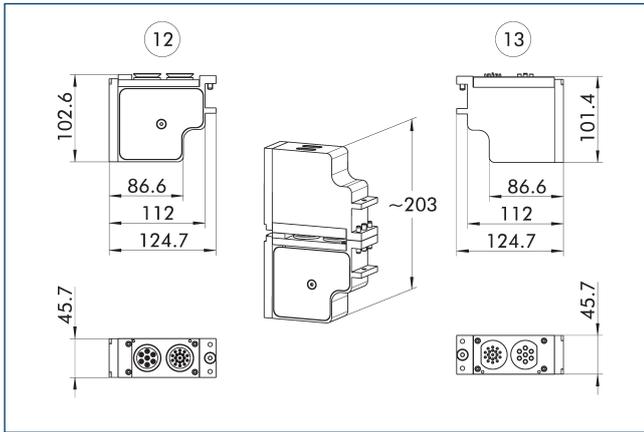

12 Master side

13 Adapter side

# COS KE7


## Feed-through modules



### Technical data

Description		COS KE7-K	COS KE7-A
ID		1586422	1586420
Suitable on		Change head	Tool
Screw connection diagram		K	K
Transmission type		Communication	Communication
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		EtherNet	EtherNet
Transmission Speed	[Mbit/s]	100	100
Number of pin contacts		3	3
Nominal current	[A]	4	4
Alternating voltage	[V AC]	125	125
Direct voltage	[V DC]	125	125
Electrical connection		M12, Female D-Coded connector	M12, Female D-Coded connector
Outlet connection		radial	radial
Electrical connection		M8 connector, A-coded, 3-pin	M8 socket, A-coded, 3-pin
Electrical connection outlet		radial	radial
Special properties		Supports Power-over-Ethernet (PoE).	Supports Power-over-Ethernet (PoE).


Combination COS KE7-K and COS KE7-A

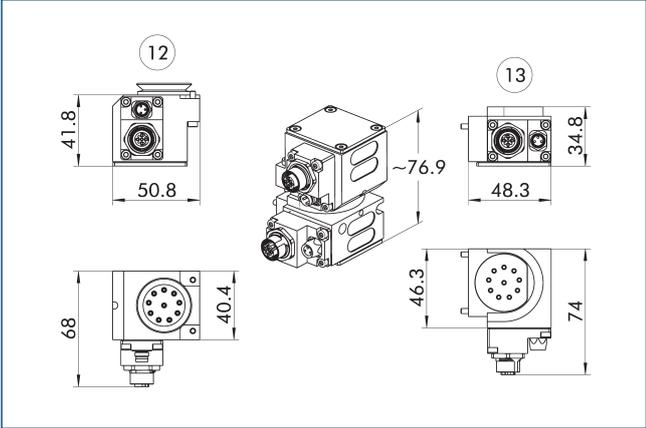

12 Master side

13 Adapter side

Pin assignment for COS KE7-K with COS KE7-A

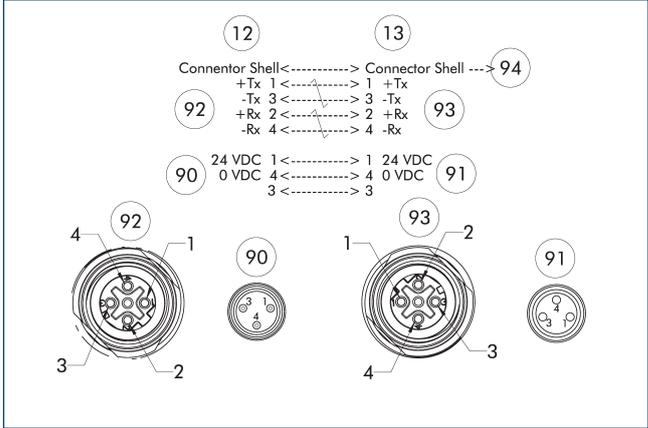

12 Master side

13 Adapter side

90 M8 connector, A-coded, 3-pin


91 M8 socket, A-coded, 3-pin

92 M12, Female D-Coded connector

93 M12, Female D-Coded connector

94 leading pin

Cover COS KPC-A

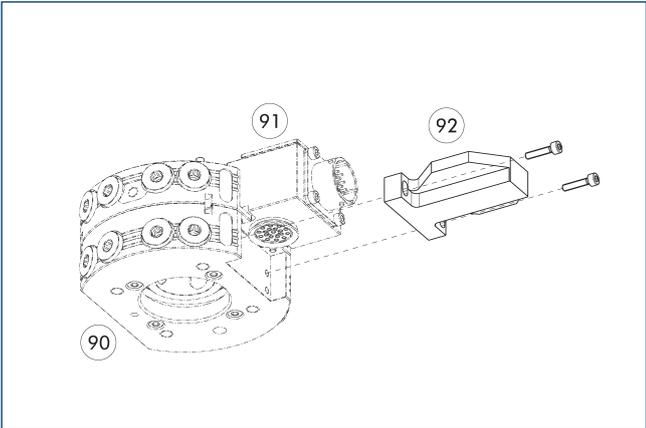


90 Automatic tool changers CPS

92 Cover COS KPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS KPC-A	1585142	Many electrical modules with screw-on pattern K

Cable plug/cable extension

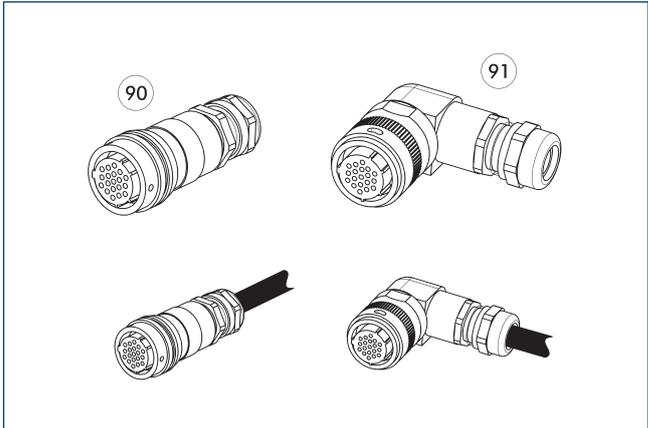

90 Plug/socket straight

91 Connector/angled socket


Other cable lengths on request.

Description	ID	
Angled cable connector		
KST-M12-W 4DP	1416610	
Straight cable connector		
KST-M12-G 4DP	9965967	

# COS KE7

Feed-through modules

## Plug-in connector power supply/signals

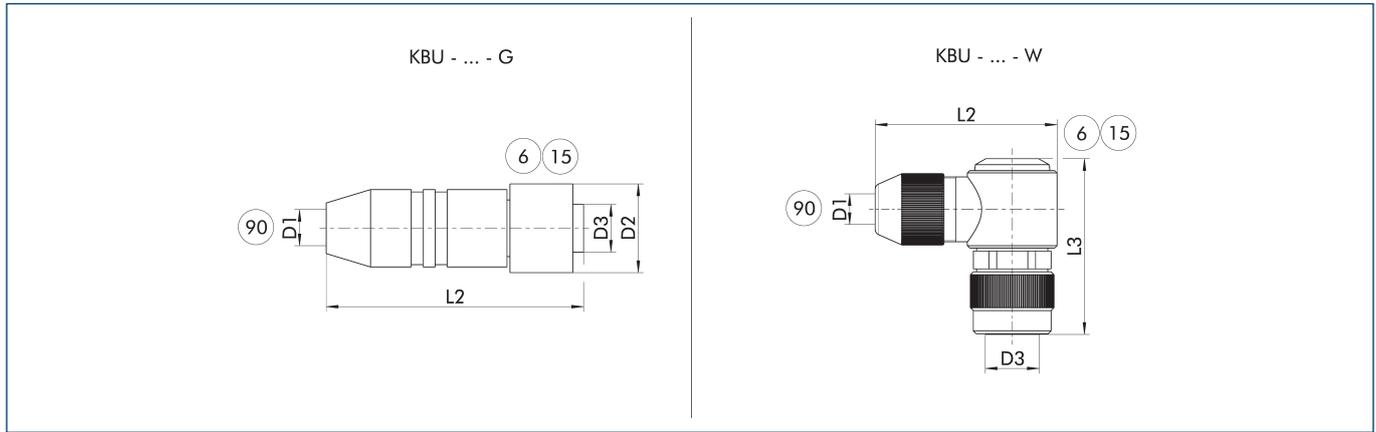

KBU - ... - G Socket with straight outlet  
 KBU - ... - W Socket with angular outlet


⑥ Connection module side      ⑨0 D1 - max. diameter connection cable  
 ⑮ Socket

The plug connectors are used to connect the SCHUNK products to the voltage supply. A customer cable can be used for this. The individual wire strands can be soldered to the solder pins of the connector.

Description	ID
Cable connector	
KBU-M8-G 3P	0300052
KBU-M8-W 3P	0300053

① For the connection cable, a cross-section for each individual wire strand of 0.25 mm<sup>2</sup> is recommended. Please refer to the product documentation for information about max. cable length and min. wire cross section.

## Power supply plug-in connector

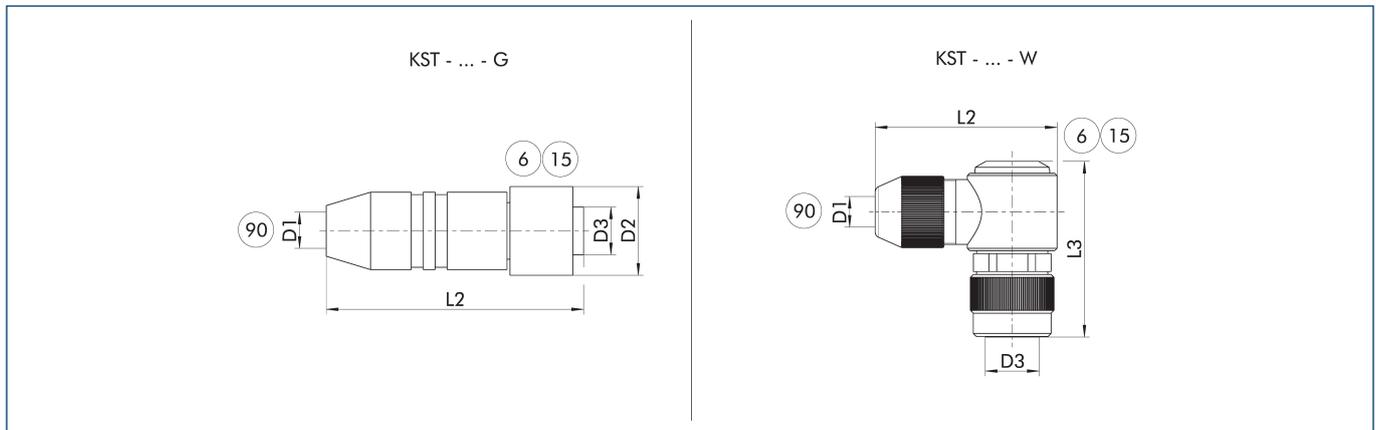

KST - ... - G Connection plug with straight outlet  
 KST - ... - W Connection plug with angular outlet

⑥ Connection module side      ⑨0 D1 - max. diameter connection cable  
 ⑮ Socket

The plug connectors are used to connect the SCHUNK product to the voltage supply. A customer cable can be used for this. The individual wire strands are clamped using screw connections in the plug connector.

Description	ID
Cable connector	
KST-M8-G 3P	0300050
KST-M8-W 3P	0300051

① For the connection cable, a cross-section for each individual wire strand of 0.14 mm<sup>2</sup> is recommended. Please refer to the product documentation for information about max. cable length and min. wire cross section.



# COS KE8


Feed-through modules



## Technical data

Description		COS KE8-K	COS KE8-A
ID		1586426	1586425
Suitable on		Change head	Tool
Screw connection diagram		K	K
Transmission type		Communication	Communication
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		EtherNet	EtherNet
Transmission Speed	[Mbit/s]	100	100
Nominal current	[A]	4	4
Alternating voltage	[V AC]	125	125
Direct voltage	[V DC]	125	125
Electrical connection		M12, Female D-Coded connector	M12, Female D-Coded connector
Outlet connection		radial	radial
Electrical connection		M8 connector, A-coded, 4-pin	M8 socket, A-coded, 4-pin
Electrical connection outlet		radial	radial
Special properties		Supports Power-over-Ethernet (PoE).	Supports Power-over-Ethernet (PoE).


## Combination of COS KE8-K and COS KE8-A

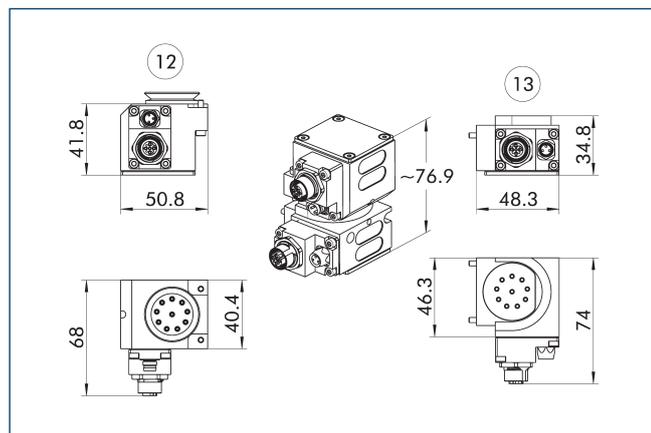

12 Master side

13 Adapter side

## Pin assignment for COS KE8-K with COS KE8-A

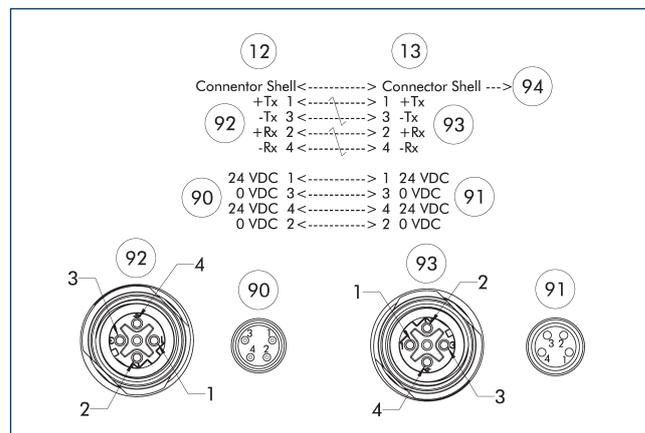

12 Master side

13 Adapter side

90 M8 connector, A-coded, 4-pin


91 M8 socket, A-coded, 4-pin

92 M12, Female D-Coded connector

93 M12, Female D-Coded connector

94 leading pin

## Cover COS KPC-A

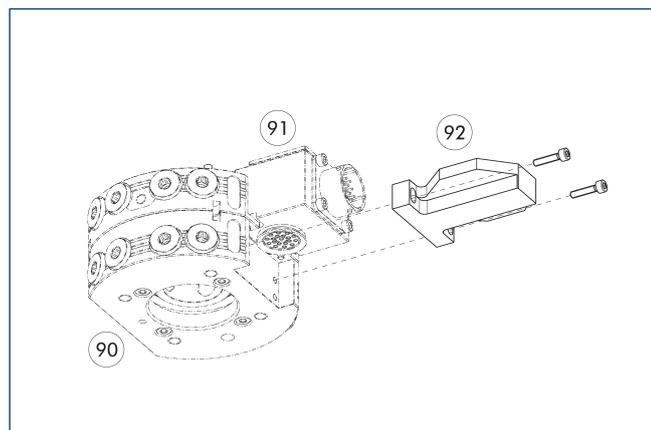


90 Automatic tool changers CPS

92 Cover COS KPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS KPC-A	1585142	Many electrical modules with screw-on pattern K

## Cable plug/cable extension

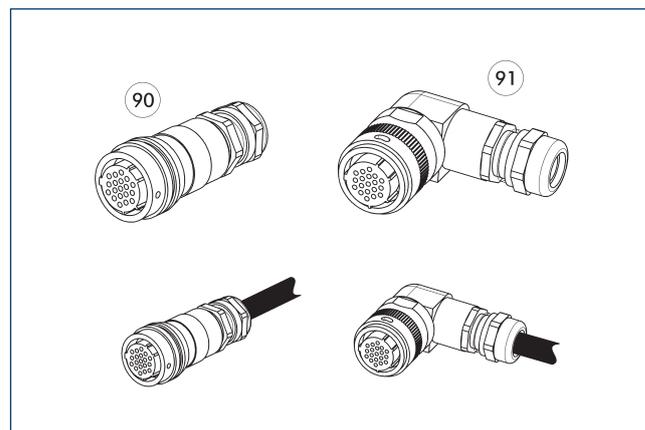


90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Angled cable connector		
KST-M12-W 4DP	1416610	
KST-M8-W 4AP	1628064	
Straight cable connector		
KST-M12-G 4DP	9965967	
KST-M8-G 4AP	9960108	

## Plug-in connector power supply/signals

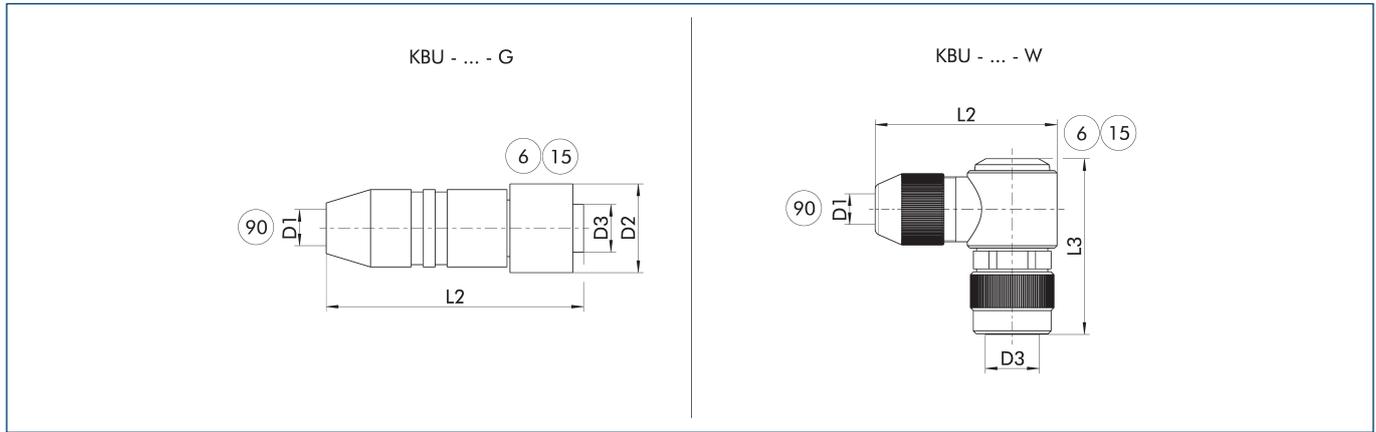

KBU - ... - G Socket with straight outlet  
 KBU - ... - W Socket with angular outlet

⑥ Connection module side      ⑨⑩ D1 - max. diameter connection cable  
 ⑮ Socket

The plug connectors are used to connect the SCHUNK products to the voltage supply. A customer cable can be used for this. The individual wire strands can be soldered to the solder pins of the connector.

Description	ID	D1 (max.) [mm]	L2 [mm]	D2 [mm]	L3 [mm]	D3
<b>Cable connector</b>						
KBU-M8-G 4P	1506418	5	37	12		M8
KBU-M8-W 4P	1506422	5	25		28	M8

① For the connection cable, a cross-section for each individual wire strand of 0.25 mm<sup>2</sup> is recommended. Please refer to the product documentation for information about max. cable length and min. wire cross section.



# COS RD5


Feed-through modules



## Technical data

Description		COS RD5-K	COS RD5-A
ID		1586650	1586639
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.1	0.1
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		DeviceNet, IO-Link Class B	DeviceNet, IO-Link Class B
Electrical connection		M12 connector, A-coded	M12 socket, A-coded
Outlet connection		radial	radial


## Combination COS RD5-K and COS RD5-A

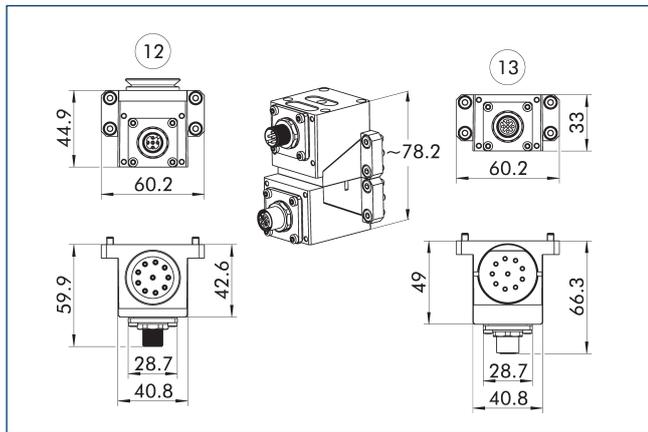

12 Master side

13 Adapter side

## Pin assignment for COS RD5-K and COS RD5-A

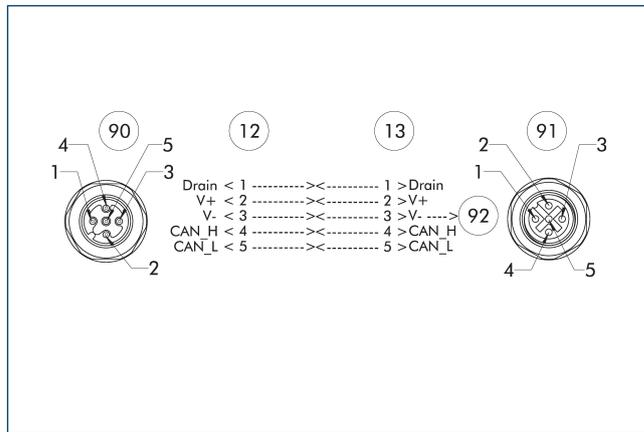

12 Master side


13 Adapter side

90 M12 connector, A-coded

91 M12 socket, A-coded

92 leading pin

## Cover COS JPC-A

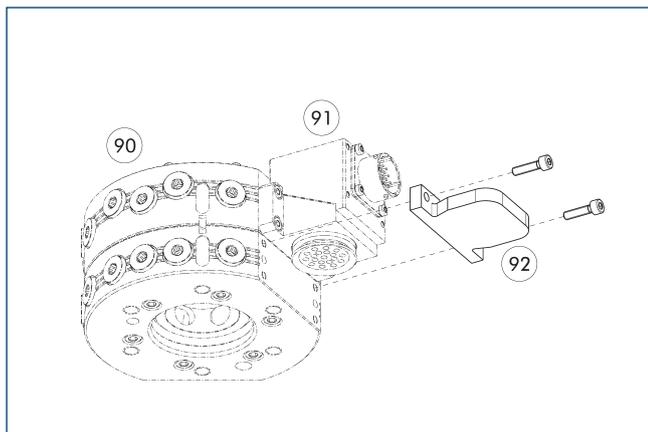

90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

# COS RE10


Feed-through modules



## Technical data

Description		COS RE10-K	COS RE10-A
ID		1586653	1586652
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.17	0.16
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		EtherNet	EtherNet
Transmission Speed	[Mbit/s]	100	100
Nominal current	[A]	1	1
Alternating voltage	[V AC]	48	48
Direct voltage	[V DC]	48	48
Electrical connection		AIDA PushPull-RJ45	AIDA PushPull-RJ45
Outlet connection		radial	radial
Special properties		Supports Power-over-Ethernet (PoE) and complies with CAT5e requirements.	Supports Power-over-Ethernet (PoE) and complies with CAT5e requirements.


## Combination COS RE10-K and COS RE10-A

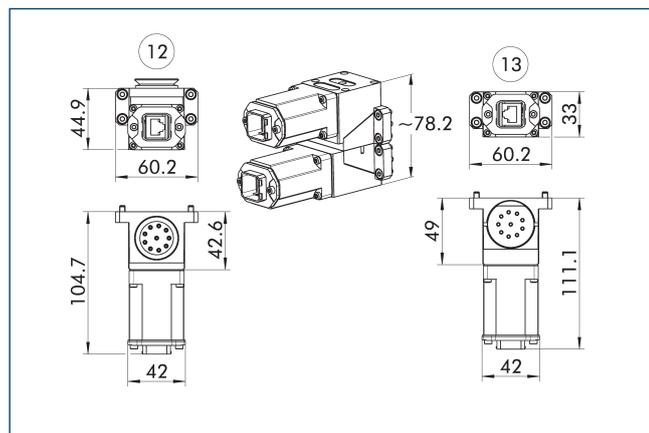

12 Master side

13 Adapter side

## Pin assignment for COS RE10-K with COS RE10-A

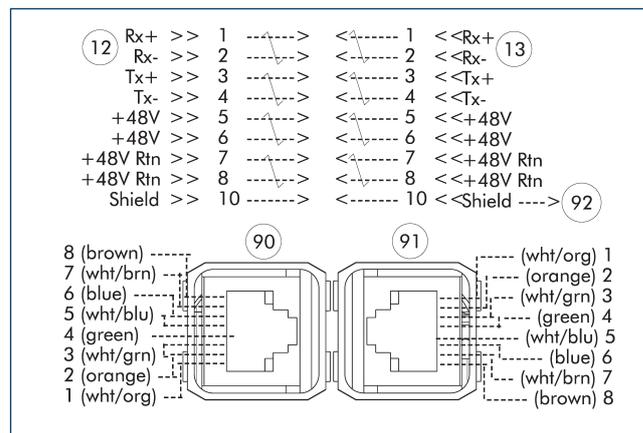

12 Master side


13 Adapter side

90 AIDA PushPull-RJ45

91 AIDA PushPull-RJ45

92 leading pin

## Cover COS JPC-A

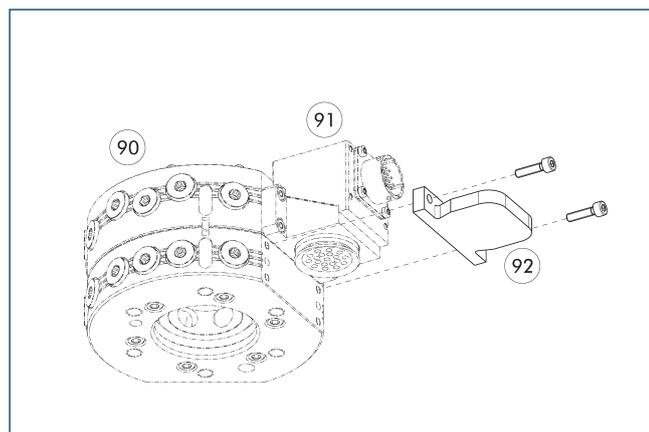

90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

# COS RE5


Feed-through modules



## Technical data

Description		COS RE5-K	COS RE5-A
ID		1586656	1586654
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.12	0.11
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		EtherNet	EtherNet
Transmission Speed	[Mbit/s]	100	100
Nominal current	[A]	2	2
Alternating voltage	[V AC]	60	60
Direct voltage	[V DC]	60	60
Electrical connection		M12, Female D-Coded connector	M12, Female D-Coded connector
Outlet connection		radial	radial
Special properties		Supports Power-over-Ethernet (PoE).	Supports Power-over-Ethernet (PoE).


Combination COS RE5-K and COS RE5-A

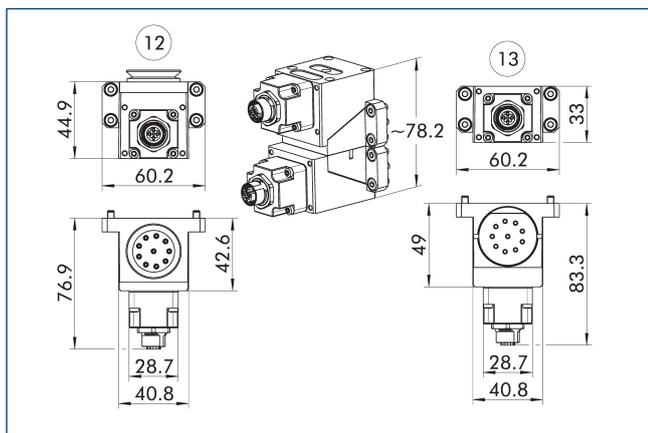

12 Master side

13 Adapter side

Pin assignment for COS RE5-K with COS RE5-A

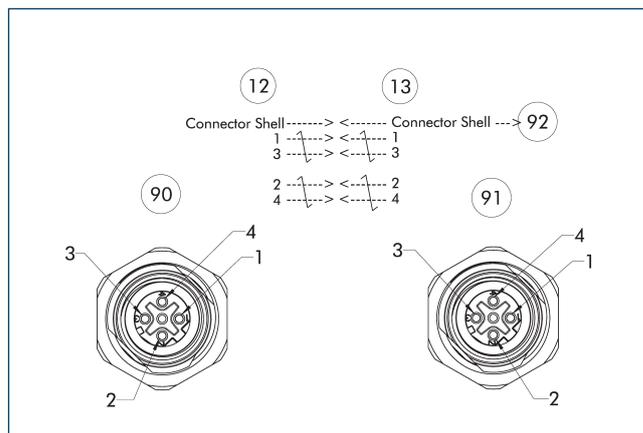

12 Master side


13 Adapter side

90 M12, Female D-Coded connector

91 M12, Female D-Coded connector

92 leading pin

Cover COS JPC-A

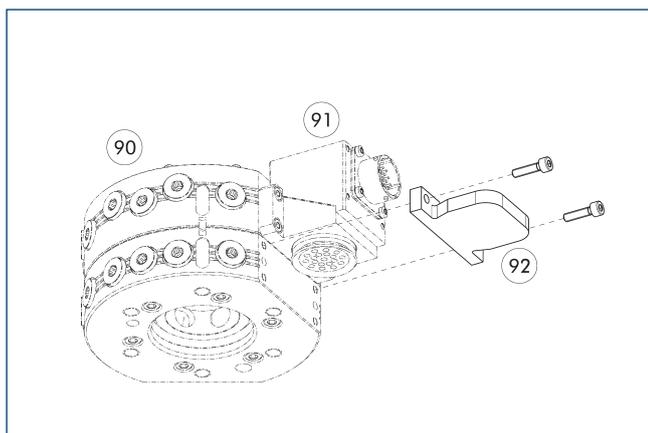


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

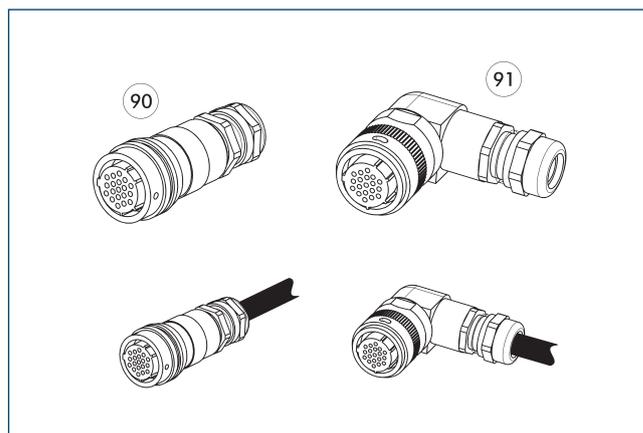

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Angled cable connector		
KST-M12-W 4DP	1416610	
Straight cable connector		
KST-M12-G 4DP	9965967	

# COS RE8


Feed-through modules



## Technical data

Description		COS RE8-K	COS RE8-A
ID		1586660	1586659
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		EtherNet	EtherNet
Transmission Speed	[Mbit/s]	1000	1000
Number of pin contacts		8	8
Nominal current	[A]	0.5	0.5
Alternating voltage	[V AC]	48	48
Direct voltage	[V DC]	60	60
Electrical connection		M12 socket, X-coded	M12 socket, X-coded
Outlet connection		radial	radial
Special properties		Supports Power-over-Ethernet (PoE) and complies with CAT5e requirements.	Supports Power-over-Ethernet (PoE) and complies with CAT5e requirements.


Combination COS RE8-K and COS RE8-A

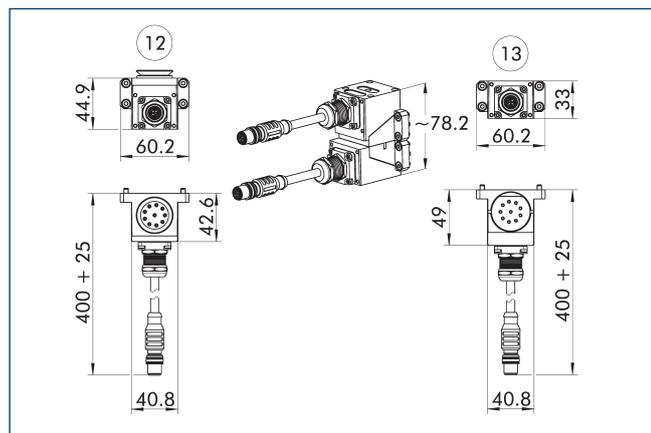

12 Master side

13 Adapter side

Pin assignment for COS RE8-K with COS RE8-A

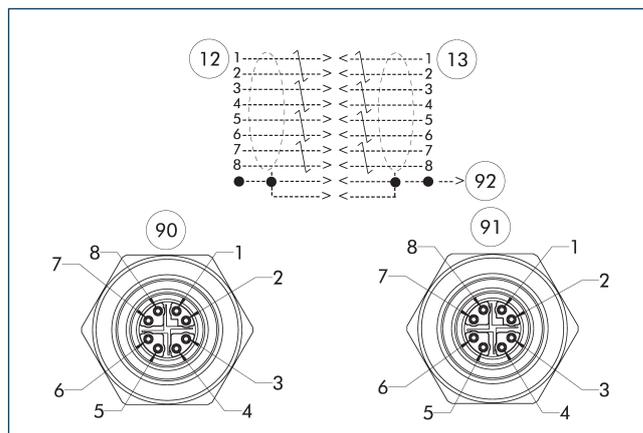

12 Master side


13 Adapter side

90 M12 socket, X-coded

91 M12 socket, X-coded

92 leading pin

Cover COS JPC-A

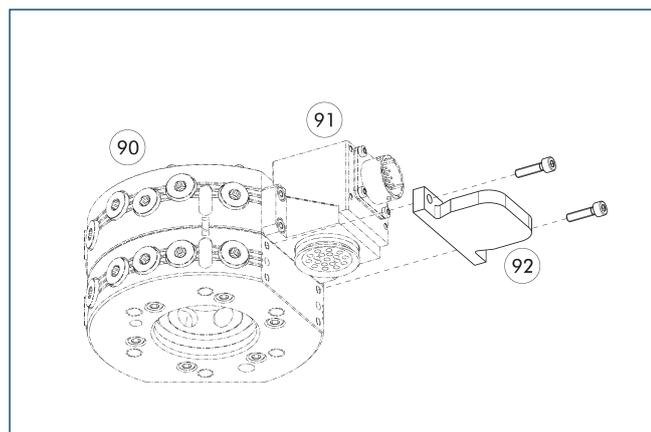

90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

# COS TD

## Feed-through modules




### Technical data

Description		COS TD-K	COS TD-A
ID		1586732	1586730
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.48	0.36
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		DeviceNet	DeviceNet
Number of pin contacts		4	4
Nominal current	[A]	5	5
Alternating voltage	[V AC]	24	24
Direct voltage	[V DC]	24	24
Electrical connection		7/8" connector, 5-pin	7/8" socket, 5-pin
Outlet connection		radial	radial
Electrical connection		7/8" connector, 4-pin	7/8" socket, 4-pin
Electrical connection outlet		radial	radial

① For mounting on CPS 040 and CPS 041, an additional spacer (ID 1584116) is required.


Combination COS TD-K and COS TD-A

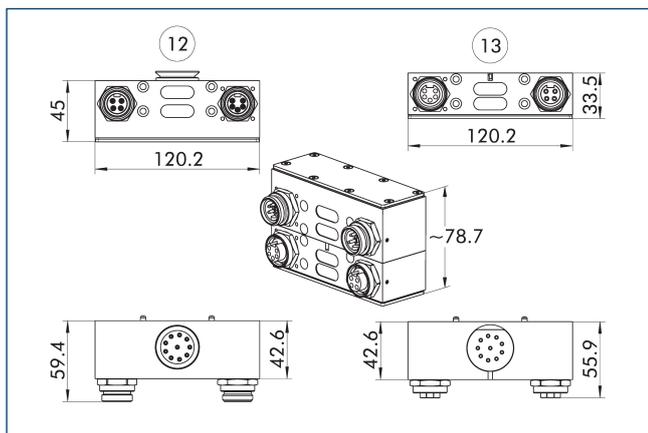

12 Master side

13 Adapter side

Cover COS JPC-A

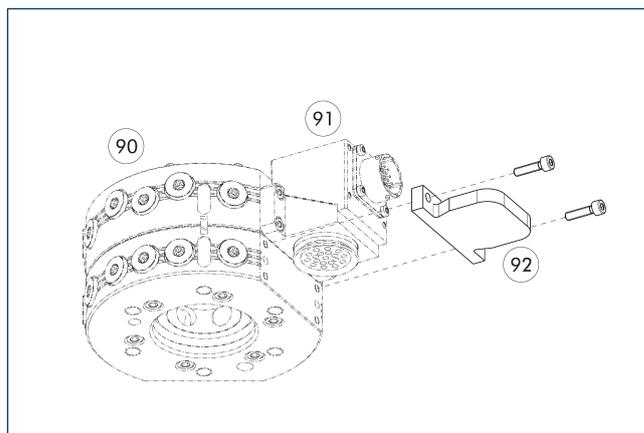


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

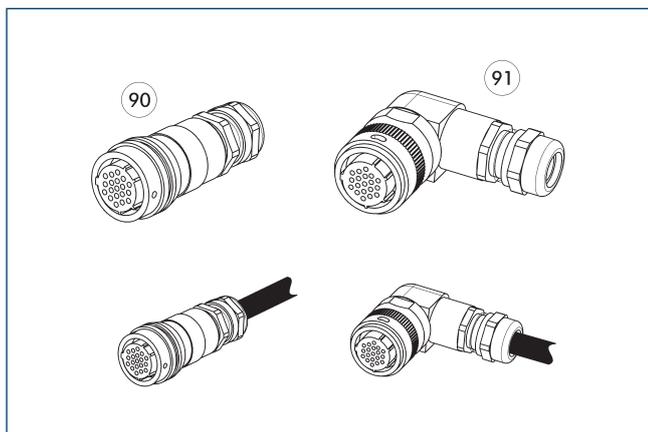

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Straight cable connector		
KBU-7/8-G 4P	9957560	
KBU-7/8-G 5P	9957558	
KST-7/8-G 4P	9957561	
KST-7/8-G 5P	9957559	




### Technical data

Description		COS TE-K	COS TE-A
ID		1586736	1586735
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.46	0.46
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		PROFINET, EtherNet	PROFINET, EtherNet
Transmission Speed	[Mbit/s]	10/100	10/100
Number of pin contacts		4	4
Nominal current	[A]	5	5
Alternating voltage	[V AC]	250	250
Direct voltage	[V DC]	250	250
Electrical connection		M12, Female D-Coded connector	M12, Female D-Coded connector
Outlet connection		radial	radial
Electrical connection		7/8" connector, 4-pin	7/8" socket, 4-pin
Electrical connection outlet		radial	radial
Special properties		Simultaneous feed-through of PROFINET/EtherNet and 4-pin voltage supply.	Simultaneous feed-through of PROFINET/EtherNet and 4-pin voltage supply.

① For mounting on CPS 040 and CPS 041, an additional spacer (ID 1584116) is required.


Combination COS TE-K and COS TE-A

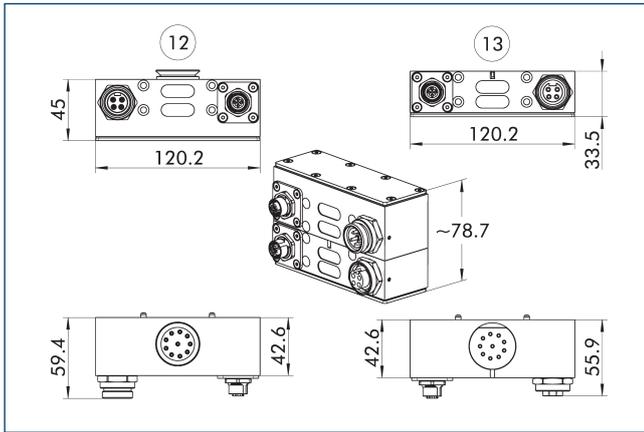

12 Master side

13 Adapter side

Pin assignment for COS TE-K with COS TE-A

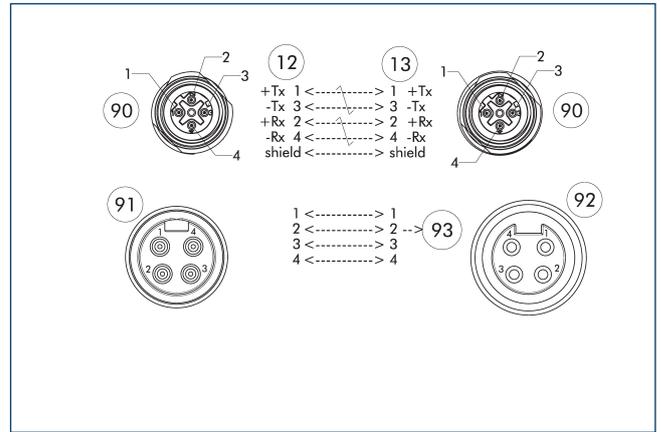

12 Master side

13 Adapter side


90 M12, Female D-Coded connector

91 7/8" connector, 4-pin

92 7/8" socket, 4-pin

93 leading pin

Cover COS JPC-A

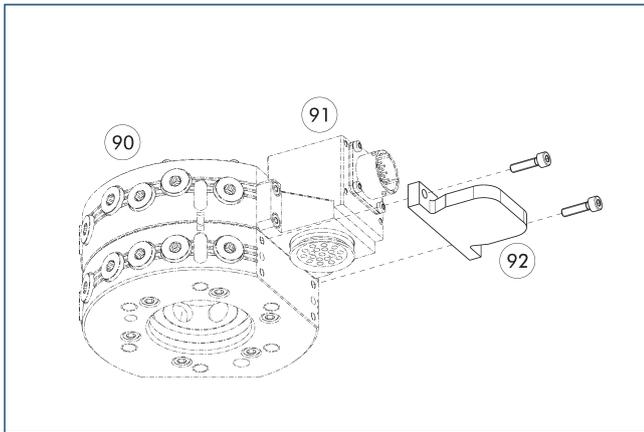


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

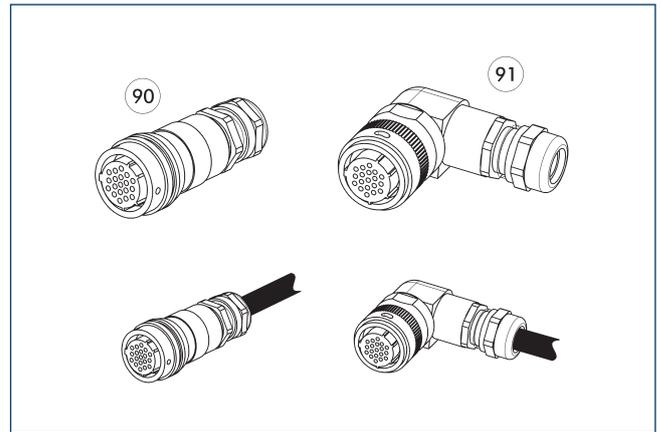

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Angled cable connector		
KST-M12-W 4DP	1416610	
Straight cable connector		
KBU-7/8-G 4P	9957560	
KST-7/8-G 4P	9957561	
KST-M12-G 4DP	9965967	

# COS TP

## Feed-through modules




### Technical data

Description		COS TP-K	COS TP-A
ID		1586740	1586738
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Communication	Communication
Weight	[kg]	0.46	0.35
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Bus system		PROFINET, EtherNet	PROFINET, EtherNet
Transmission Speed	[Mbit/s]	10/100	10/100
Number of pin contacts		5	5
Nominal current	[A]	5	5
Alternating voltage	[V AC]	250	250
Direct voltage	[V DC]	250	250
Electrical connection		M12, Female D-Coded connector	M12, Female D-Coded connector
Outlet connection		radial	radial
Electrical connection		7/8" connector, 5-pin	7/8" socket, 5-pin
Electrical connection outlet		radial	radial
Special properties		Simultaneous feeding through of PROFINET/EtherNet and 5-pin voltage supply.	Simultaneous feeding through of PROFINET/EtherNet and 5-pin voltage supply.

① For mounting on CPS 040 and CPS 041, an additional spacer (ID 1584116) is required.


Combination COS TP-K and COS TP-A

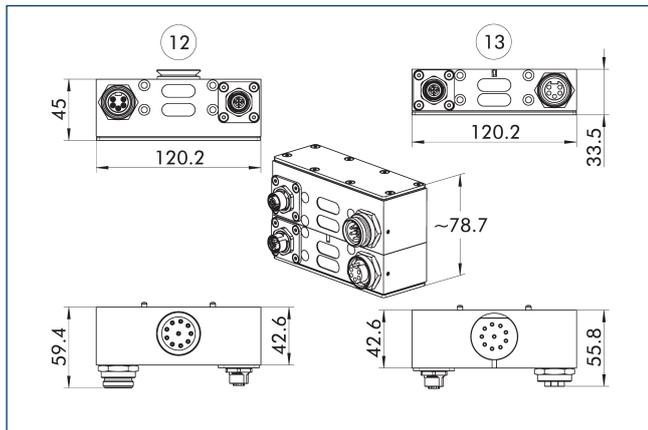

12 Master side

13 Adapter side

Pin assignment for COS TP-K with COS TP-A

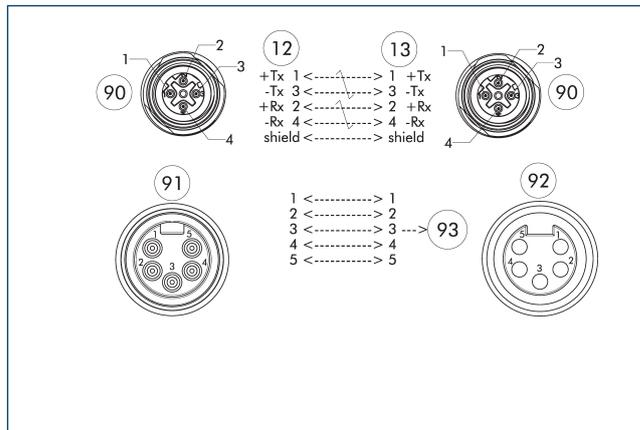

12 Master side

13 Adapter side


90 M12, Female D-Coded connector

91 7/8" connector, 5-pin

92 7/8" socket, 5-pin

93 leading pin

Cover COS JPC-A

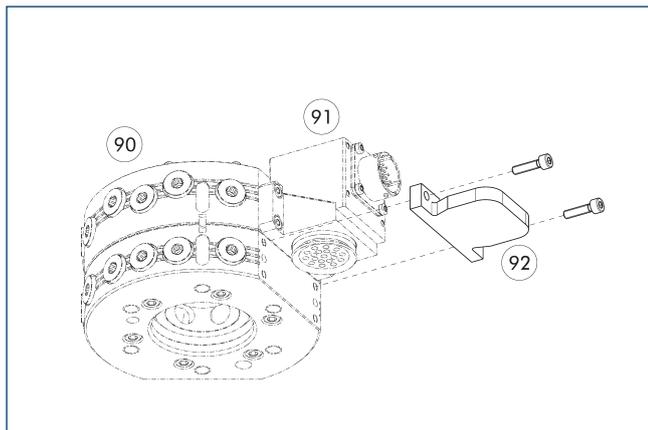


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

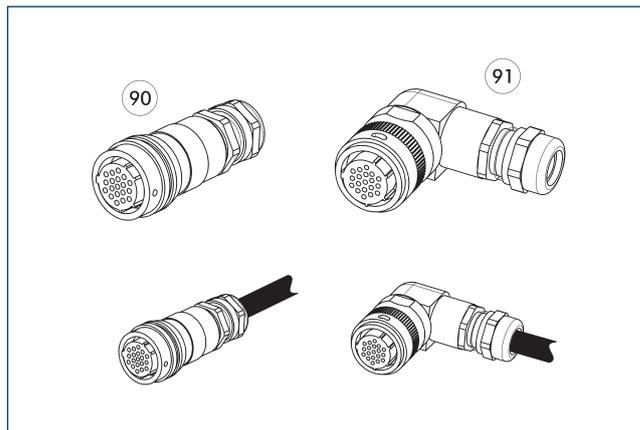

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Angled cable connector		
KST-M12-W 4DP	1416610	
Straight cable connector		
KBU-7/8-G 5P	9957558	
KST-7/8-G 5P	9957559	
KST-M12-G 4DP	9965967	

# COS PG3

## Feed-through modules




### Technical data

Description		COS PG3-K	COS PG3-A
ID		1586923	1586922
Suitable on		Change head	Tool
Screw connection diagram		J/B	J/B
Transmission type		Welding	Welding
Weight	[kg]	0.18	0.2
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP40 (only in coupled status)	IP40 (only in coupled status)
Number of pin contacts		1	1
Nominal current	[A]	200	200
Alternating voltage	[V AC]	600	600
Direct voltage	[V DC]	600	600
Electrical connection		M8 for ring cable lug up to 35 mm <sup>2</sup> /AWG 2	M8 for ring cable lug up to 35 mm <sup>2</sup> /AWG 2
Outlet connection		axial	axial
Special properties		Suitable for grounding in welding applications.	Suitable for grounding in welding applications.

① This feed-through module is also compatible with the CPB tool changer.


Combination COS PG3-K and COS PG3-A

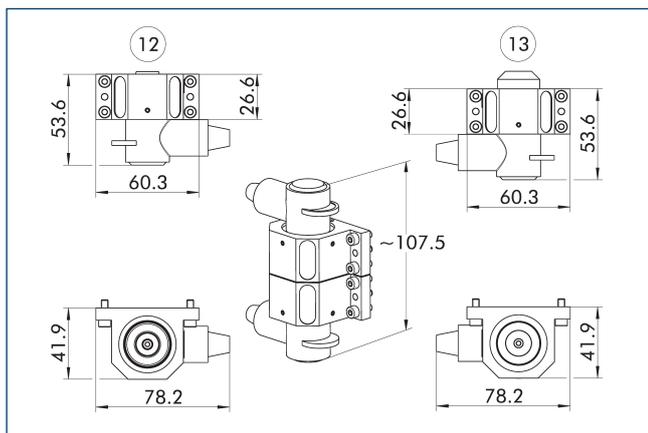

12 Master side

13 Adapter side


Combination COS PG3-K and COS PG3-A with bolt

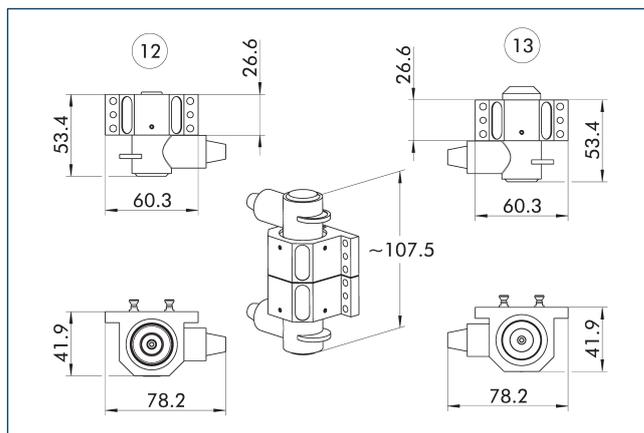

12 Master side

13 Adapter side

Pin assignment for COS PG3-K with COS PG3-A

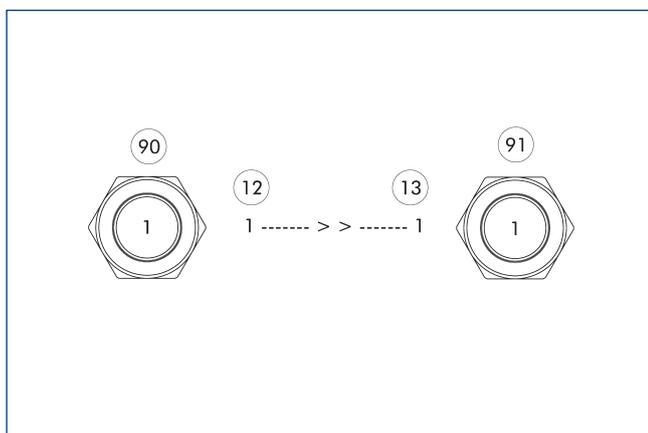

12 Master side

13 Adapter side

90 M8 for ring cable lug up to 35 mm<sup>2</sup>/AWG 2

91 M8 for ring cable lug up to 35 mm<sup>2</sup>/AWG 2

# COS PY41


Feed-through modules



## Technical data

Description		COS PY41-K	COS PY41-A
ID		1586926	1586925
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Welding	Welding
Weight	[kg]	0.39	0.37
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP40 (only in coupled status)	IP40 (only in coupled status)
Nominal current	[A]	165	165
Alternating voltage	[V AC]	150	150
Direct voltage	[V DC]	210	210
Number of pin contacts		3	3
Electrical connection		M25 cable gland for $\varnothing$ 10 – 18 mm	M25 cable gland for $\varnothing$ 10 – 18 mm
Electrical connection outlet		radial	radial
Special properties		Ring cable lugs are used to secure the cables to the contact base. M6 recommended for ring cable lugs for 35 mm <sup>2</sup> /AWG 2 and 25 mm <sup>2</sup> /AWG 4.	Ring cable lugs are used to secure the cables to the contact base. M6 recommended for ring cable lugs for 35 mm <sup>2</sup> /AWG 2 and 25 mm <sup>2</sup> /AWG 4.


## Combination COS PY41-K and COS PY41-A

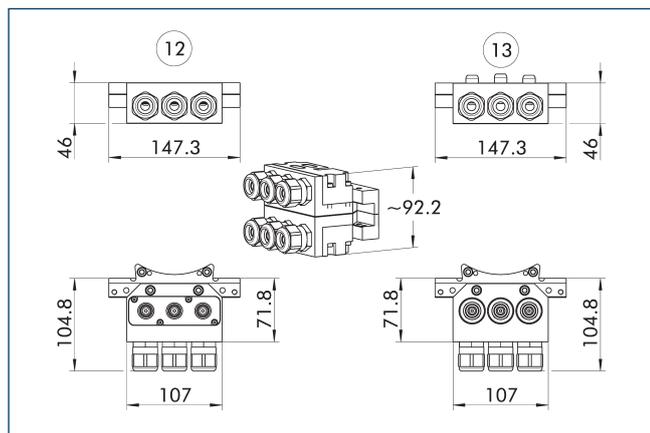

⑫ Master side

⑬ Adapter side

## Pin assignment for COS PY41-K with COS PY41-A

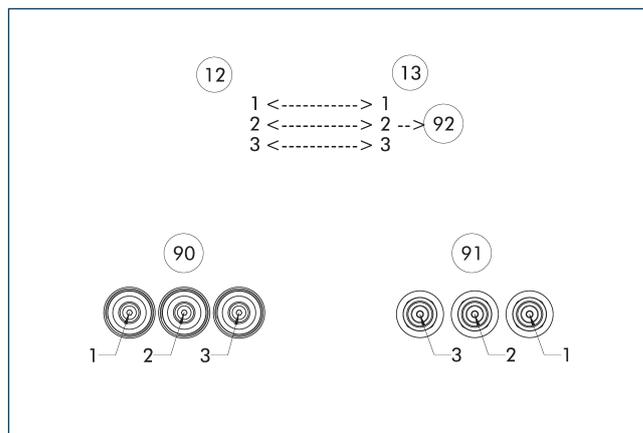

⑫ Master side

⑬ Adapter side

⑨⑩ M6 recommended for ring cable lugs for 35 mm²/AWG 2 and 25 mm²/AWG 4.

⑨① M6 recommended for ring cable lugs for 35 mm²/AWG 2 and 25 mm²/AWG 4.

⑨② leading pin

# COS JBx

## Feed-through modules




### Technical data

Description		COS JB2-K	COS JB3-K
ID		1586302	1586303
Suitable on		Change head	Change head
Screw connection diagram		L1	L2
Weight	[kg]	0.75	0.84
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		tangential	tangential
Type of medium		Air	Air
Max. operating pressure	[bar]	6.9	6.9
Special properties		Pneumatic connection (2 x G1/4") when using with external, customer-side valve.	Pneumatic connection (2 x G1/4") when using with external, customer-side valve.

① When using a pneumatic control module on the CPS-K on side A, the distance plate COS Z50-A-LD, ID 1584093, is also required on the CPS-A.


Combination COS JB2-K and spacer plate

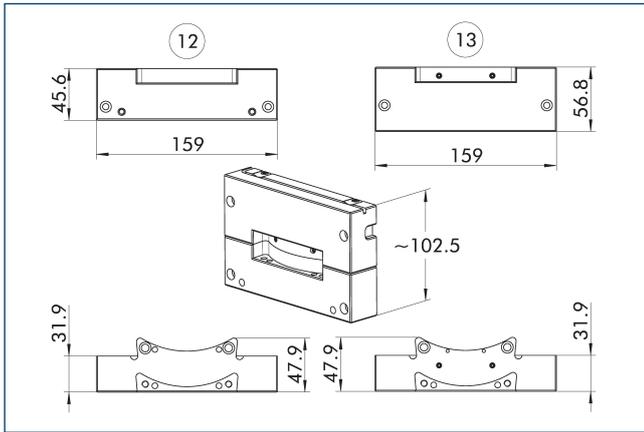

12 Master side

13 Adapter side


Combination COS JB3-K and spacer plate

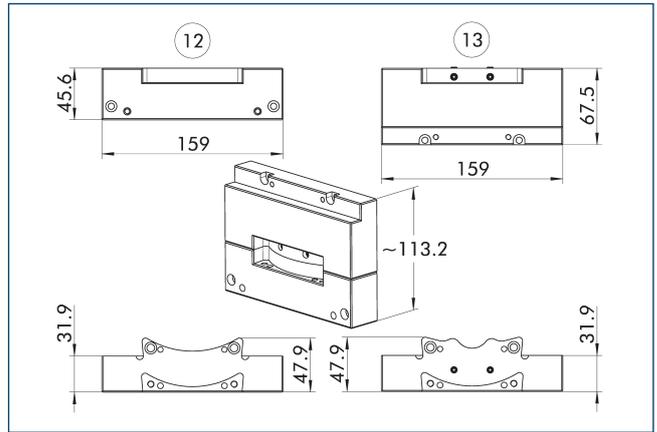

12 Master side

13 Adapter side

Distance plate

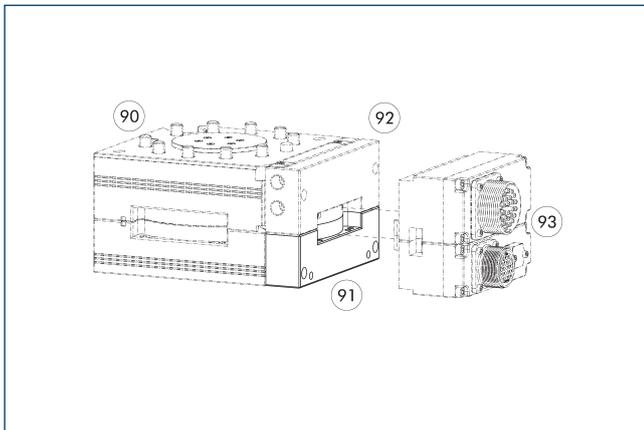

90 Automatic tool changers CPS

92 Pneumatic control module

91 Distance plate

93 Optional module COS master and adapter

Description	ID	Suitable for
Distance plate		
COS Z50-A-LD	1584093	Control modules COS JB2-K, COS JB3-K, COS JU2-K and COS JU3-K

# COS AF2


Feed-through modules



## Technical data

Description		COS AF2-K	COS AF2-A
ID		1586482	1586481
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	1.18	1.04
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		8x G3/8"	8x G3/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		1.400 l/min (G3/8")	1.400 l/min (G3/8")
Max. operating pressure	[bar]	6.9	6.9
Special properties		Open ports for compressed air and vacuum.	Open ports for compressed air and vacuum.

Combination COS AF2-K and COS AF2-A

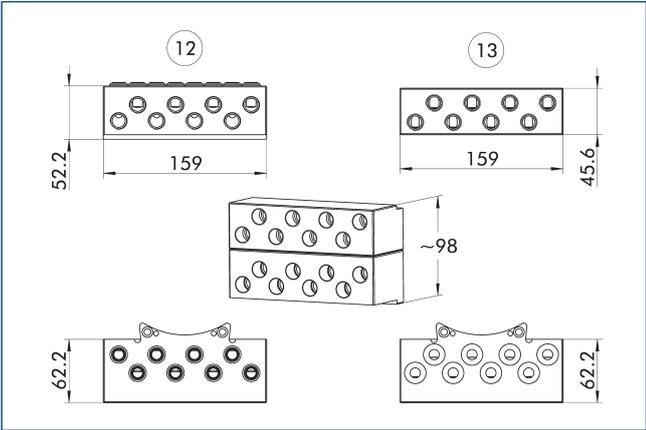

12 Master side

13 Adapter side

# COS AM2


Feed-through modules



## Technical data

Description		COS AM2-K	COS AM2-A
ID		1586486	1586485
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.48	0.39
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		2x G1/2"	2x G1/2"
Type of medium		Air	Air
Max. volumetric flow per fluid feed-through		1.460 l/min (G1/2")	1.460 l/min (G1/2")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports	self-sealing ports

Combination COS AM2-K and COS AM2-A

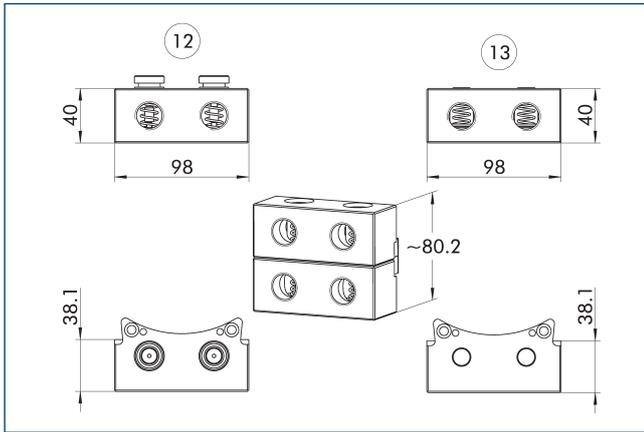

12 Master side

13 Adapter side

# COS P05


Feed-through modules



## Technical data

Description		COS P05-K	COS P05-A
ID		1586844	1586843
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.2	0.21
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		10x M5	10x M5
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		150 l/min (M5)	150 l/min (M5)
Max. operating pressure	[bar]	8	8

**Combination COS P05-K and COS P05-A**

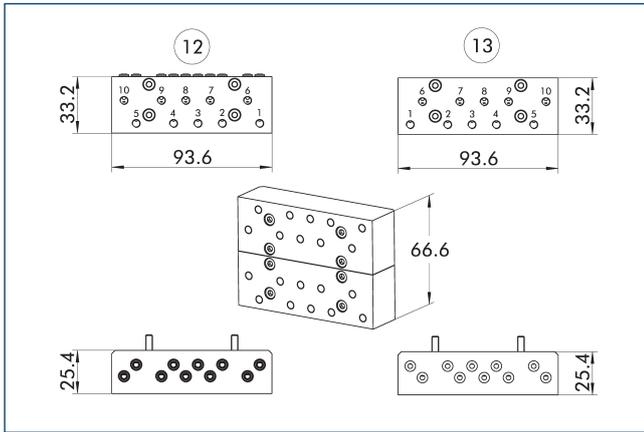

⑫ Master side

⑬ Adapter side

# COS P12A


Feed-through modules



## Technical data

Description		COS P12A-K	COS P12A-A
ID		1586847	1586846
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.26	0.19
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		2x G1/2"	2x G1/2"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		1.600 l/min (G1/2")	1.600 l/min (G1/2")
Max. operating pressure	[bar]	8	8

## Combination COS P12A-K and COS P12A-A

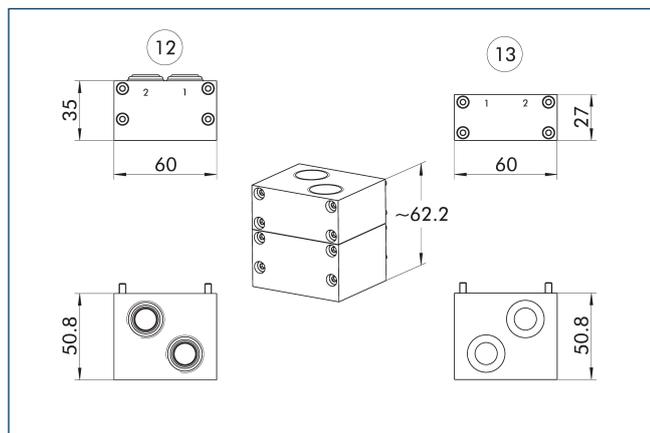

12 Master side

13 Adapter side

# COS P14


Feed-through modules



## Technical data

Description		COS P14-K	COS P14-A
ID		1586849	1586848
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.14	0.13
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		2x G1/4"	2x G1/4"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		900 l/min (G1/4")	900 l/min (G1/4")
Max. operating pressure	[bar]	8	8

Combination COS P14-K and COS P14-A

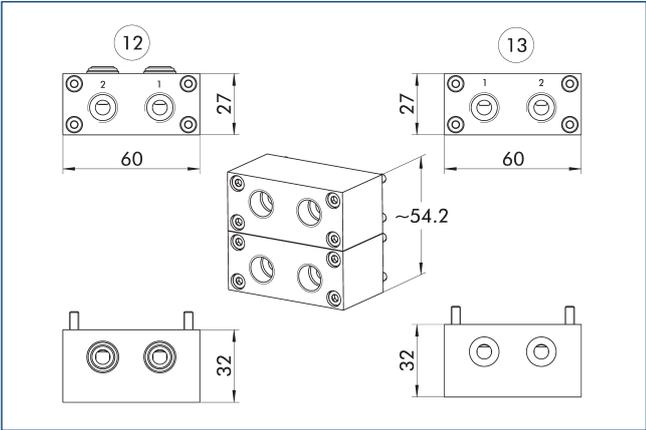

12 Master side

13 Adapter side

# COS P186

## Feed-through modules




### Technical data

Description		COS P186-K	COS P186A-K	COS P186-A	COS P186A-A
ID		1586862	1586866	1586861	1586864
Suitable on		Change head	Change head	Tool	Tool
Screw connection diagram		J/B	J/B	J/B	J/B
Transmission type		Pneumatics	Pneumatics	Pneumatics	Pneumatics
Weight	[kg]	0.14	0.16	0.16	0.16
Min./max. ambient temperature	[°C]	5/60	5/60	5/60	5/60
Outlet connection		radial	axial	radial	axial
No. of fluid feed-throughs		6x G1/8"	6x G1/8"	6x G1/8"	6x G1/8"
Type of medium		Air, vacuum	Air, vacuum	Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		650 l/min (G1/8")	650 l/min (G1/8")	650 l/min (G1/8")	650 l/min (G1/8")
Max. operating pressure	[bar]	8	8	8	8
Special properties		COS P186-K and COS P186A-K are compatible with COS P186-A and COS P186A-A, respectively.	COS P186-K and COS P186A-K are compatible with COS P186-A and COS P186A-A, respectively.	COS P186-A and COS P186A-A are compatible with COS P186-K and COS P186A-K, respectively.	COS P186-A and COS P186A-A are compatible with COS P186-K and COS P186A-K, respectively.

① This feed-through module is also compatible with the CPB tool changer.


## Combination COS P186-K and COS P186-A

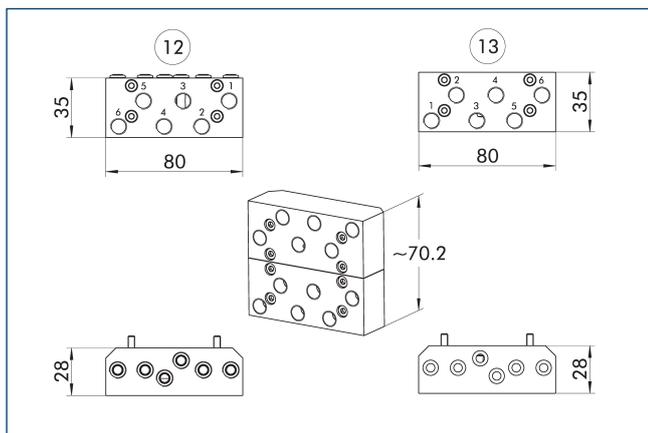

12 Master side

13 Adapter side


## Combination COS P186-K and COS P186-A with bolt

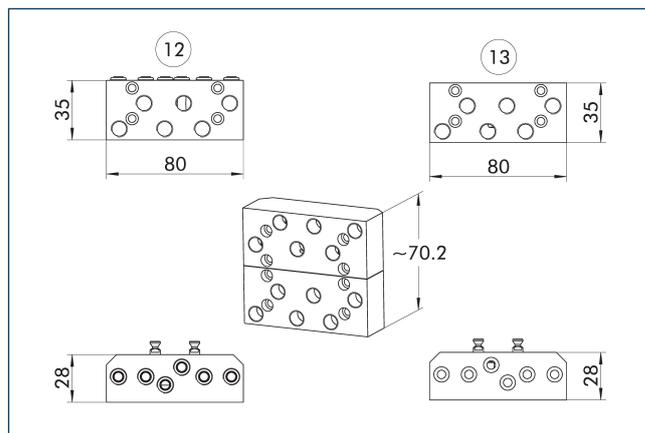

12 Master side

13 Adapter side


## Combination COS P186A-K and COS P186A-A

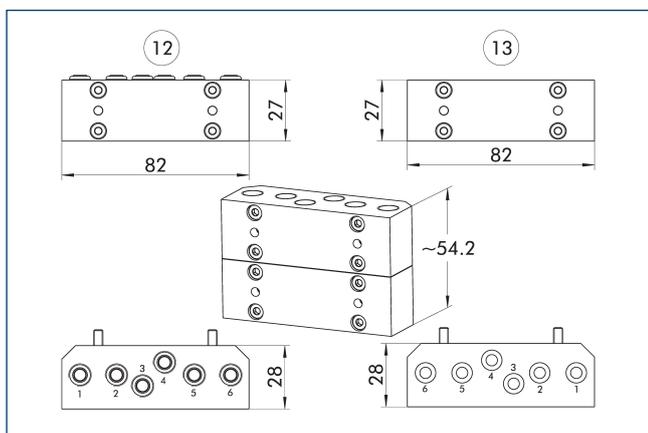

12 Master side

13 Adapter side


## Combination COS P186A-K and COS P186A-A with bolt

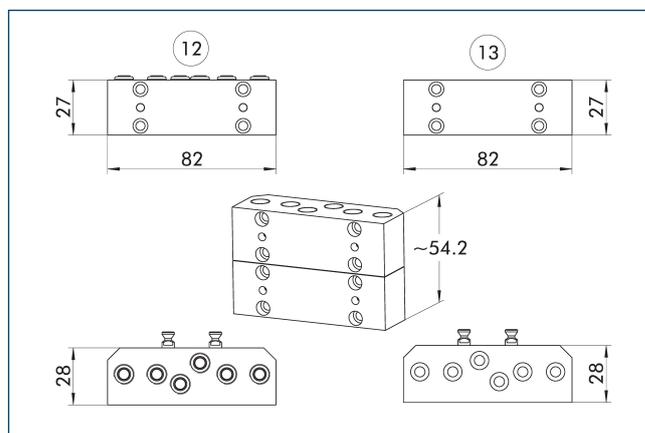

12 Master side

13 Adapter side

## Combination options P186 and P186A

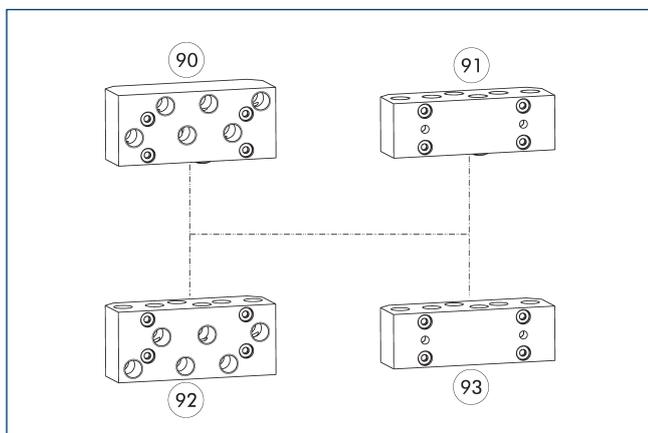

90 COS P186-K

92 COS P186-A

91 COS P186A-K

93 COS P186A-A

# COS P188


Feed-through modules



## Technical data

Description		COS P188-K	COS P188-A
ID		1586870	1586869
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.24	0.24
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		8x G1/8"	8x G1/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		650 l/min (G1/8")	650 l/min (G1/8")
Max. operating pressure	[bar]	8	8

Combination COS P188-K and COS P188-A

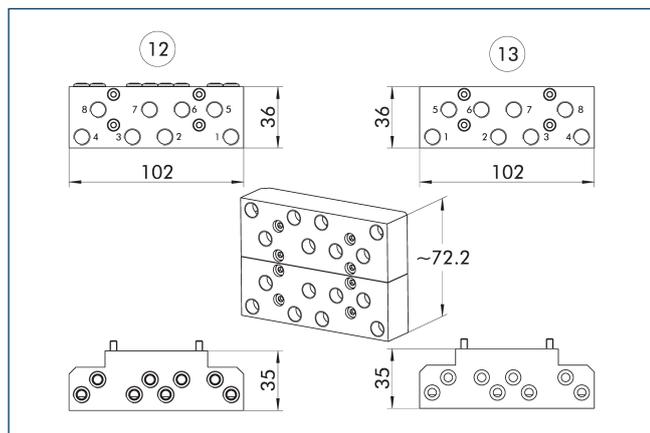

12 Master side

13 Adapter side

# COS P18


Feed-through modules



## Technical data

Description		COS P18-K	COS P18-A
ID		1586872	1586871
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.15	0.15
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		4x G1/8"	4x G1/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		650 l/min (G1/8")	650 l/min (G1/8")
Max. operating pressure	[bar]	8	8

Combination COS P18-K and COS P18-A

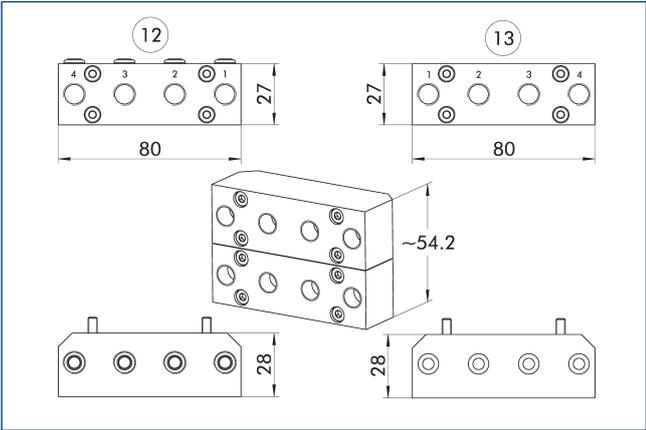

12 Master side

13 Adapter side

# COS P238


Feed-through modules



## Technical data

Description		COS P238-K	COS P238-A
ID		1586877	1586876
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.15	0.14
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		2x G3/8"	2x G3/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		1.400 l/min (G3/8")	1.400 l/min (G3/8")
Max. operating pressure	[bar]	8	8

## Combination COS P238-K and COS P238-A

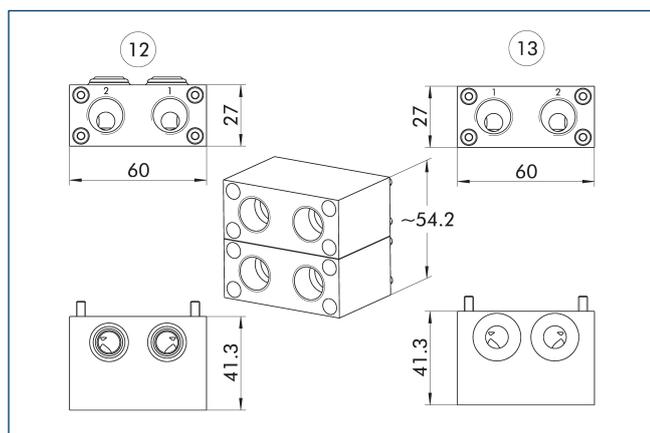

12 Master side

13 Adapter side

# COS P38A

Feed-through modules




## Technical data

Description		COS P38A-K	COS P38A-A
ID		1586879	1586878
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.21	0.21
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		4x G3/8"	4x G3/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		1.400 l/min (G3/8")	1.400 l/min (G3/8")
Max. operating pressure	[bar]	8	8

① For mounting on CPS 040 and CPS 041, an additional spacer (ID 1584116) is required.

## Combination COS P38A-K and COS P38A-A

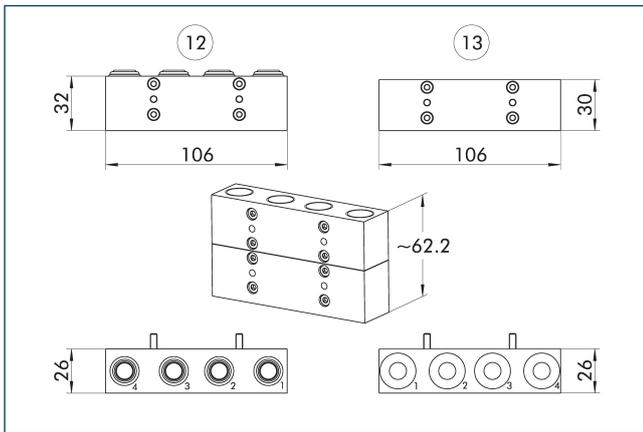

12 Master side

13 Adapter side

# COS P48

Feed-through modules




## Technical data

Description		COS P48-K	COS P48-A
ID		1586891	1586890
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.24	0.21
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		4x G3/8"	4x G3/8"
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		1.400 l/min (G3/8")	1.400 l/min (G3/8")
Max. operating pressure	[bar]	8	8

① For mounting on CPS 040 and CPS 041, an additional spacer (ID 1584116) is required.

## Combination COS P48-K and COS P48-A

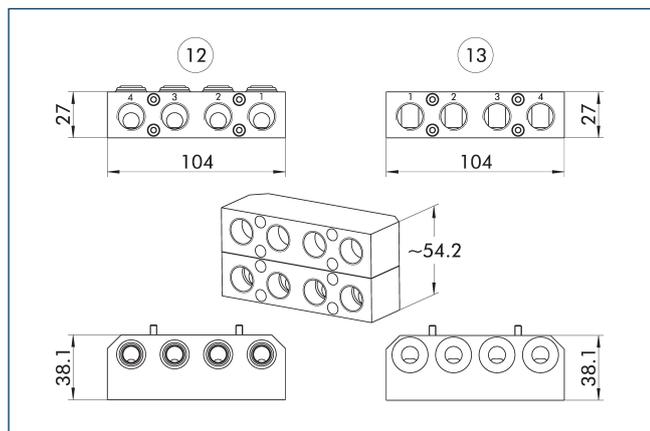

12 Master side

13 Adapter side

# COS P8M5


Feed-through modules



## Technical data

Description		COS P8M5-K	COS P8M5-A
ID		1586921	1586919
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	0.16	0.17
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial or radial	axial or radial
No. of fluid feed-throughs		8x M5	8x M5
Type of medium		Air, vacuum	Air, vacuum
Max. volumetric flow per fluid feed-through		150 l/min (M5)	150 l/min (M5)
Max. operating pressure	[bar]	8	8
Special properties		If required, another optional module can be radially mounted in a second row with the mounting surface J. The volumetric flow kV depends on the type of connection. Axial connection kV: 0.0622, radial connection kV: 0.0588, combination axial and radial connection kV: 0.0595.	If required, another optional module can be radially mounted in a second row with the mounting surface J. The volumetric flow kV depends on the type of connection. Axial connection kV: 0.0622, radial connection kV: 0.0588, combination axial and radial connection kV: 0.0595.

## Combination COS P8M5-K and COS P8M5-A

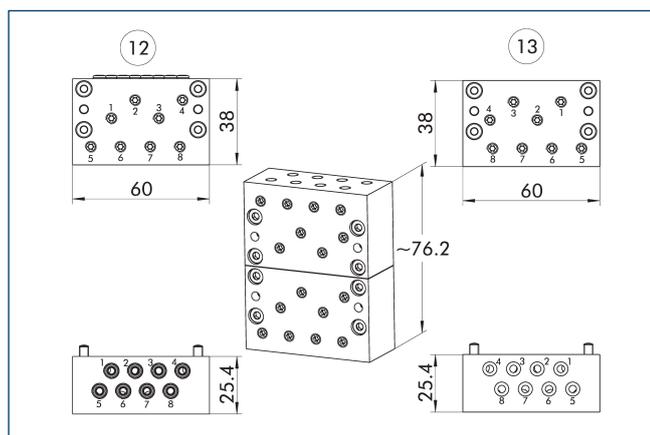

12 Master side

13 Adapter side




### Technical data

Description		COS JU2-K	COS JU3-K
ID		1586306	1586308
Suitable on		Change head	Change head
Screw connection diagram		L1	L2
Weight	[kg]	0.58	0.6
Min./max. ambient temperature	[°C]	5/50	5/50
Protection class IP		IP20	IP20
Alternating voltage	[V AC]	24	24
Direct voltage	[V DC]	24	24
Outlet connection		tangential	tangential
Type of medium		Air	Air
Max. operating pressure	[bar]	6.9	6.9
Special properties		Valve module with bi-stable directional control valve for controlling the CPS-K. Integrated pin block for control via appropriate control module. Pneumatic connection 1x G1/4".	Valve module with bi-stable directional control valve for controlling the CPS-K. Integrated pin block for control via appropriate control module. Pneumatic connection 1x G1/4".

① When using a pneumatic control module (with integrated valve) on the CPS-K on side A, the distance plate COS Z50-A-LD, ID 1584093, is also required on the CPS-A.


Combination COS JU2-K and spacer plate

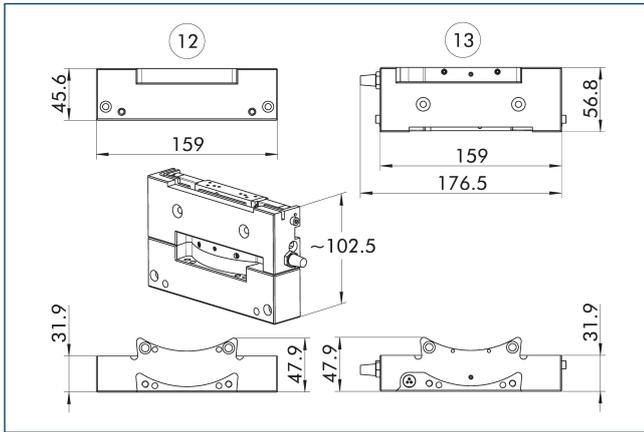

12 Master side

13 Adapter side


Combination COS JU3-K and spacer plate

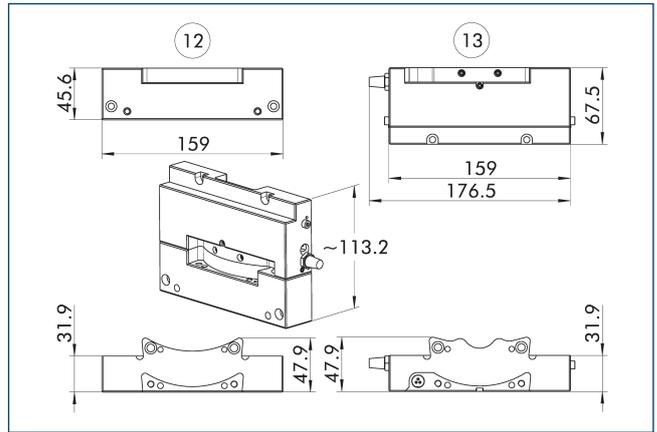

12 Master side

13 Adapter side

Distance plate

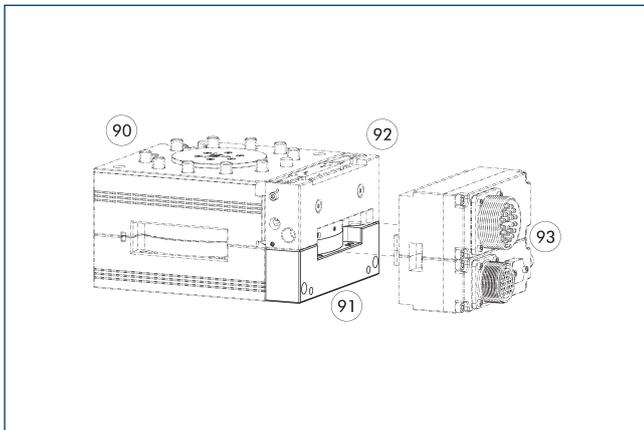

90 Automatic tool changer CPS

92 Optional module COS master

91 Distance plate

93 Optional module COS master and adapter

Description	ID	Suitable for
Distance plate		
COS Z50-A-LD	1584093	Control modules COS JB2-K, COS JB3-K, COS JU2-K and COS JU3-K

# COS V112A


Feed-through modules



## Technical data

Description		COS V112A-K	COS V112A-A
ID		1586745	1586744
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Vacuum	Vacuum
Weight	[kg]	0.39	0.36
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		1x G3/2"	1x G3/2"
Type of medium		Vacuum	Vacuum
Max. volumetric flow per fluid feed-through		G3/2"	G3/2"
Special properties		An adapter plate is required for mounting the optional module on the mounting surface J. This is included in the scope of delivery.	An adapter plate is required for mounting the optional module on the mounting surface J. This is included in the scope of delivery.

**Combination COS V112A-K and COS V112A-A**

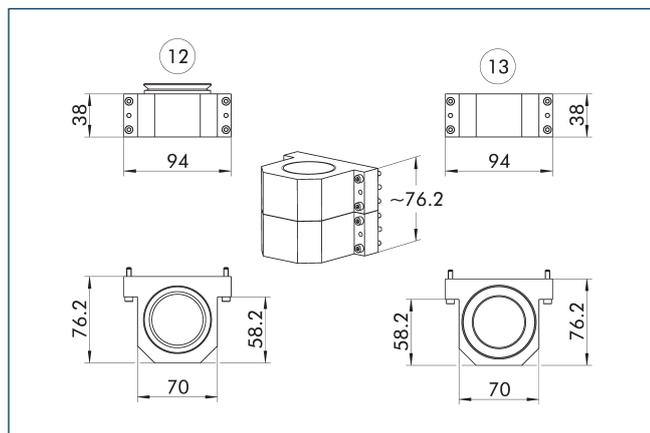


12 Master side

13 Adapter side

# COS V200A


Feed-through modules

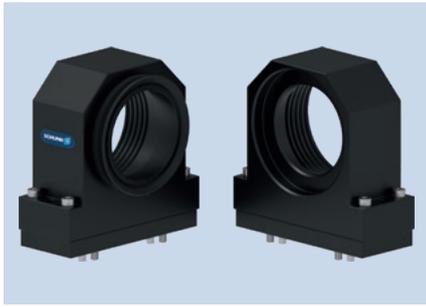

## Technical data

Description		COS V200A-K	COS V200A-A
ID		1586747	1586746
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Vacuum	Vacuum
Weight	[kg]	0.68	0.63
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		1x G2"	1x G2"
Type of medium		Vacuum	Vacuum
Max. volumetric flow per fluid feed-through		G2"	G2"
Special properties		An adapter plate is required for mounting the optional module on the mounting surface J. This is included in the scope of delivery.	An adapter plate is required for mounting the optional module on the mounting surface J. This is included in the scope of delivery.

## Combination COS V200A-K and COS V200A-A

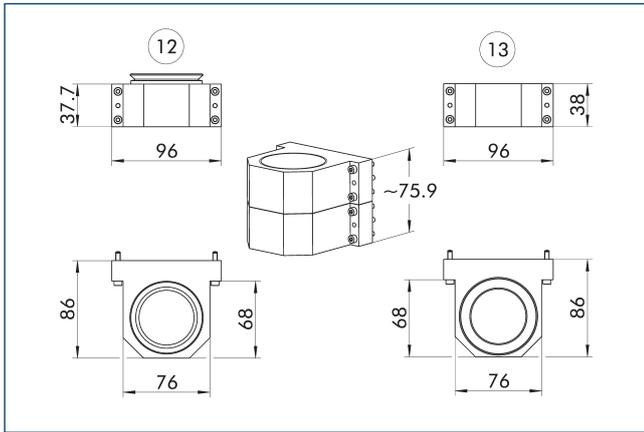


12 Master side

13 Adapter side

# COS V34


Feed-through modules

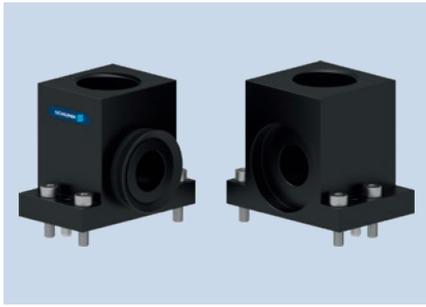

## Technical data

Description		COS V34-K	COS V34-A
ID		1586750	1586748
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Vacuum	Vacuum
Weight	[kg]	0.21	0.2
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		1x G3/4"	1x G3/4"
Type of medium		Vacuum	Vacuum
Max. volumetric flow per fluid feed-through		114,2 l/min (G3/4")	114,2 l/min (G3/4")

## Combination COS V34-K and COS V34-A

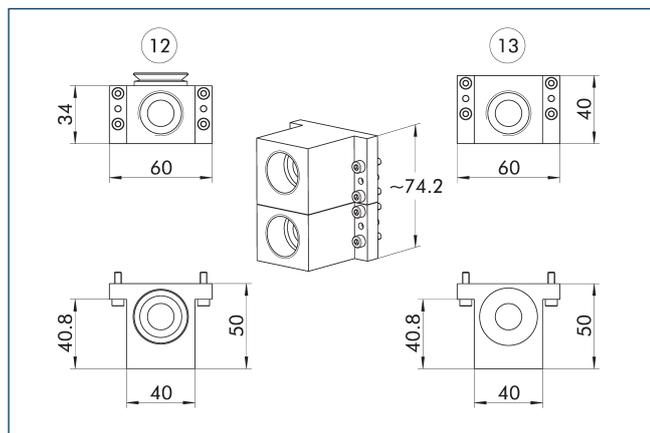

12 Master side

13 Adapter side

# COS AH2


Feed-through modules



## Technical data

Description		COS AH2-K	COS AH4-A
ID		1586483	1586484
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Pneumatics	Pneumatics
Weight	[kg]	2.21	1.16
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		8x G3/8"	8x G3/8"
Type of medium		Air	Air
Max. volumetric flow per fluid feed-through		1.460 l/min (G3/8")	1.460 l/min (G3/8")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports	self-sealing ports

## Combination of COS AH2-K and COS AH4-A

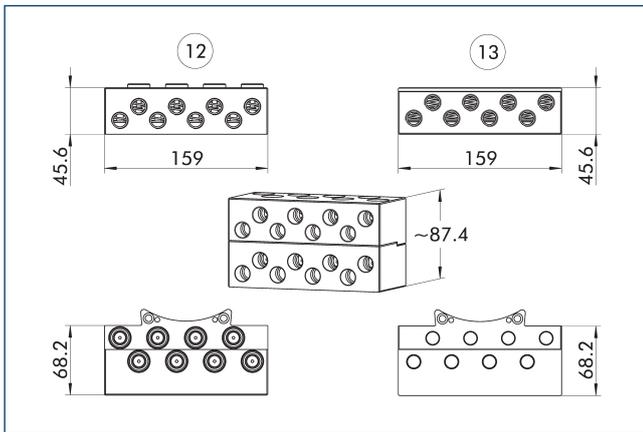

12 Master side

13 Adapter side

# COS FC2


## Feed-through modules



### Technical data

Description		COS FC2-K	COS FC4-A
ID		1586503	1586504
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		liquids	liquids
Weight	[kg]	5.9	5.9
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		8x G3/8"	8x G3/8"
Type of medium		Air, water	Air, water
Max. volumetric flow per fluid feed-through		1.300 l/min (G3/8")	1.300 l/min (G3/8")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports, stainless steel housing	self-sealing ports, stainless steel housing

Combination COS FC2-K and COS FC4-A

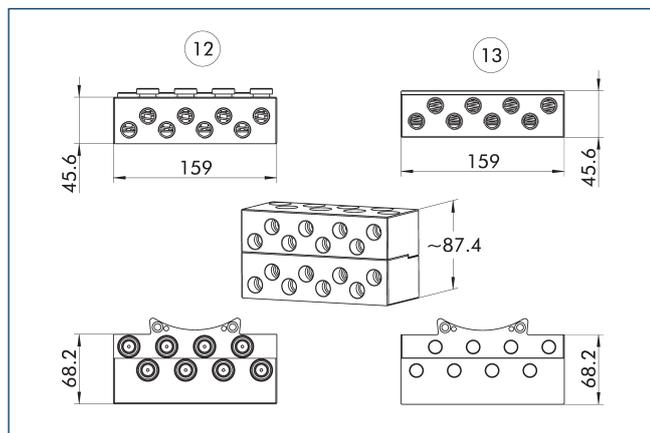

12 Master side

13 Adapter side

# COS FG2


Feed-through modules



## Technical data

Description		COS FG2-K	COS FG2-A
ID		1586506	1586505
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		liquids	liquids
Weight	[kg]	0.41	0.33
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		2x G3/8"	2x G3/8"
Type of medium		Air, water	Air, water
Max. volumetric flow per fluid feed-through		1.300 l/min (G3/8")	1.300 l/min (G3/8")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports, stainless steel housing	self-sealing ports, stainless steel housing

## Combination COS FG2-K and COS FG2-A

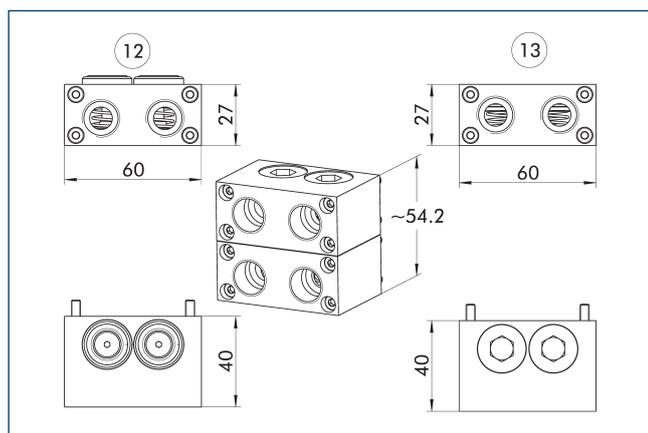

12 Master side

13 Adapter side

# COS FG4

## Feed-through modules




### Technical data

Description		COS FG4-K	COS FG4-A
ID		1586508	1586507
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		liquids	liquids
Weight	[kg]	0.72	0.58
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		4x G3/8"	4x G3/8"
Type of medium		Air, water	Air, water
Max. volumetric flow per fluid feed-through		1.300 l/min (G3/8")	1.300 l/min (G3/8")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports, stainless steel housing	self-sealing ports, stainless steel housing

ⓘ Not recommended for sizes CPS 040 and CPS 041. Please ask for details.

## Combination COS FG4-K and COS FG4-A

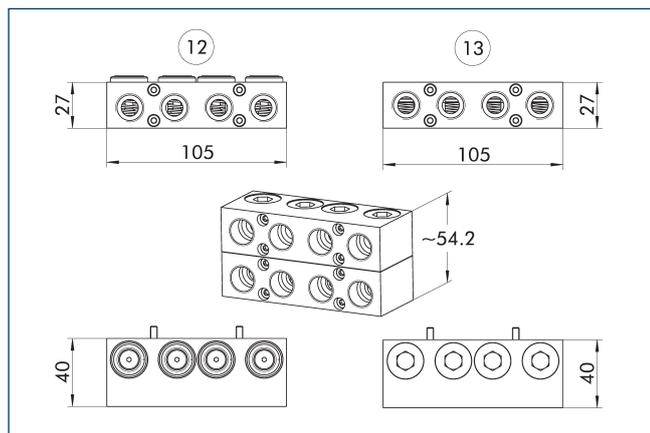

12 Master side

13 Adapter side

# COS FH12


Feed-through modules



## Technical data

Description		COS FH12-K	COS FH12-A
ID		1586540	1586509
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		liquids	liquids
Weight	[kg]	2.9	2.27
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		radial	radial
No. of fluid feed-throughs		4x G1/2"	4x G1/2"
Type of medium		Air, water	Air, water
Max. volumetric flow per fluid feed-through		1.460 l/min (G1/2")	1.460 l/min (G1/2")
Max. operating pressure	[bar]	6.9	6.9
Special properties		self-sealing ports, stainless steel housing	self-sealing ports, stainless steel housing

## Combination COS FH12-K and COS FH12-A

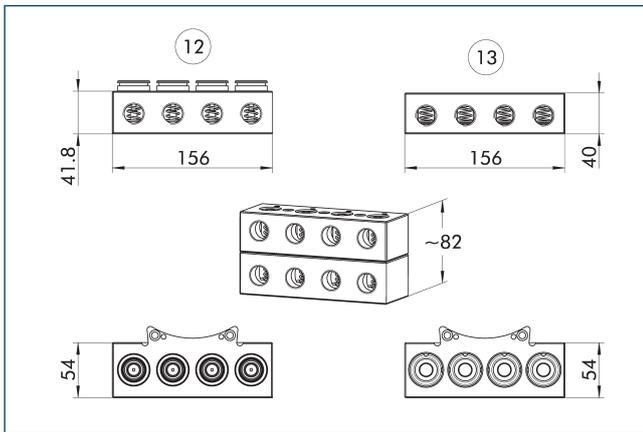

⑫ Master side

⑬ Adapter side

# COS F2HG14A

Feed-through modules




## Technical data

Description		COS F2HG14A-K	COS F2HG14A-A
ID		1586502	1586501
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Hydraulics	Hydraulics
Weight	[kg]	0.71	0.61
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		2x G1/4"	2x G1/4"
Type of medium		Hydraulic, water	Hydraulic, water
Max. volumetric flow per fluid feed-through		1.300 l/min (G1/4")	1.300 l/min (G1/4")
Max. operating pressure	[bar]	160	160
Special properties		The pressure may only be applied to one port at any time. The high pressure creates separation forces, which greatly reduces the additionally attached mass on the tool changer. The ports are self-sealing. Nevertheless, a small amount of liquid residue may remain on the surface of the ports when they are uncoupled. The amount of liquid depends to a large extent on the type of fluid processed.	The pressure may only be applied to one port at any time. The high pressure creates separation forces, which greatly reduces the additionally attached mass on the tool changer. The ports are self-sealing. Nevertheless, a small amount of liquid residue may remain on the surface of the ports when they are uncoupled. The amount of liquid depends to a large extent on the type of fluid processed.

ⓘ Not suitable for sizes CPS 040 and CPS 041.

## Combination COS F2HG14A-K and COS F2HG14A-A

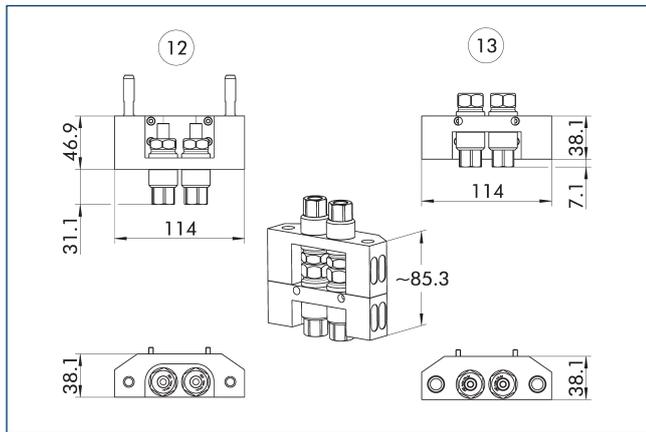

12 Master side

13 Adapter side

# COS HB2


Feed-through modules



## Technical data

Description		COS HB2-K	COS HB2-A
ID		1586284	1586283
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Hydraulics	Hydraulics
Weight	[kg]	1.47	1.3
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		1x G1/4"	1x G1/4"
No. of fluid feed-throughs		2x G3/8"	2x G3/8"
Type of medium		Hydraulic, water	Hydraulic, water
Max. volumetric flow per fluid feed-through		1.300 l/min (G1/4")	1.300 l/min (G1/4")
Max. volumetric flow per fluid feed-through		1.460 l/min (G3/8")	1.460 l/min (G3/8")
Max. operating pressure	[bar]	158	158
Special properties		Hydraulic module for the transmission of hydraulic fluid up to 158 bar operating pressure.	Hydraulic module for the transmission of hydraulic fluid up to 158 bar operating pressure.


## Combination COS HB2-K and COS HB2-A

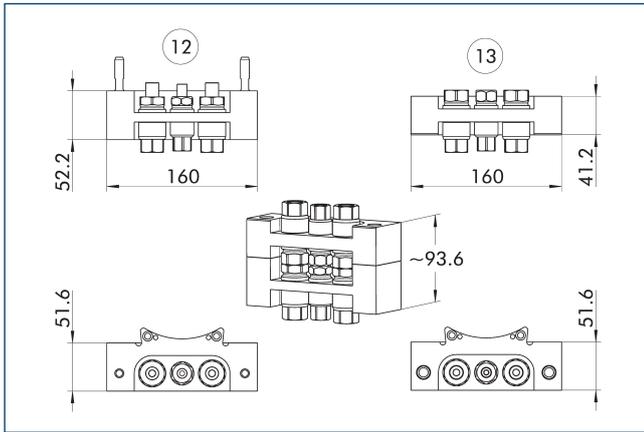

12 Master side

13 Adapter side

## Cover COS HC2-A

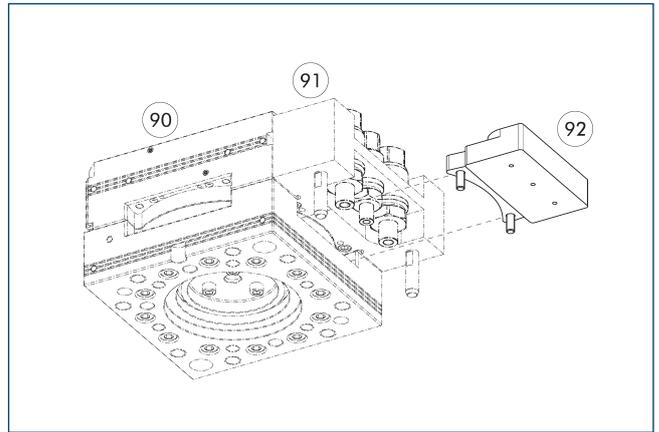

90 Automatic tool changers CPS

92 Cover COS HC2-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS HC2-A	1586300	Hydraulic modules COS HB2-K and COS HB6-K

# COS HB6


Feed-through modules



## Technical data

Description		COS HB6-K	COS HB6-A
ID		1586289	1586287
Suitable on		Change head	Tool
Screw connection diagram		L	L
Transmission type		Hydraulics	Hydraulics
Weight	[kg]	1.47	1.3
Min./max. ambient temperature	[°C]	5/60	5/60
Outlet connection		axial	axial
No. of fluid feed-throughs		2x G3/8"	2x G3/8"
Type of medium		Hydraulic, water	Hydraulic, water
Max. volumetric flow per fluid feed-through		1.460 l/min (G3/8")	1.460 l/min (G3/8")
Max. operating pressure	[bar]	496	496
Special properties		Hydraulic module for the transmission of hydraulic fluid up to 496 bar operating pressure	Hydraulic module for the transmission of hydraulic fluid up to 496 bar operating pressure


Combination COS HB6-K and COS HB6-A

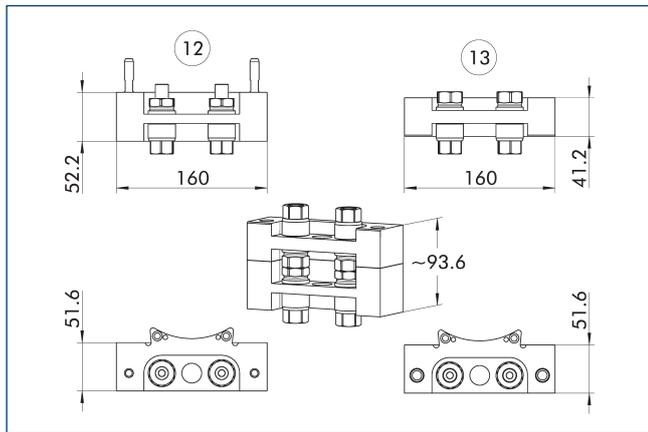

12 Master side

13 Adapter side

Cover COS HC2-A

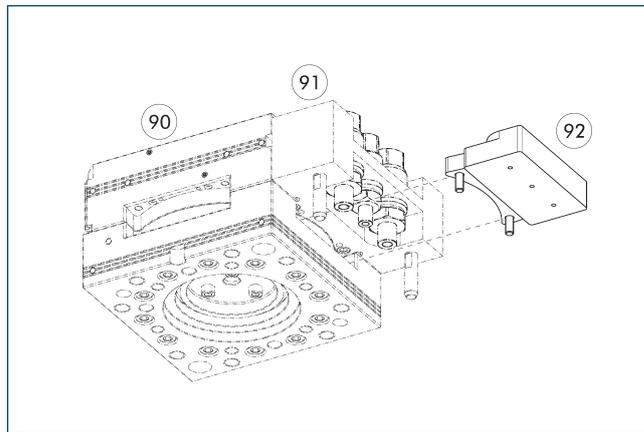

90 Automatic tool changers CPS

92 Cover COS HC2-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS HC2-A	1586300	Hydraulic modules COS HB2-K and COS HB6-K



**SCHUNK SE & Co. KG**

**Spanntechnik**

**Greiftechnik**

**Automatisierungstechnik**

Bahnhofstr. 106 - 134

D-74348 Lauffen/Neckar

Tel. +49-7133-103-0

Fax +49-7133-103-2399

info@de.schunk.com

schunk.com

Folgen Sie uns | *Follow us*

